

Systems Reference Library

IBM System/360 Operating System: Job Control Language Reference

OS Release 21.7

The job control language is used with all System/360 Operating System control programs. Every job submitted for execution by the operating system must include job control language statements. These statements contain information required by the operating system to initiate and control the processing of jobs.

This publication describes the facilities provided with the job control language and contains the information necessary to code job control language statements.







Fifth Edition (August 1976)

This is a reprint of GC28-6704-3 incorporating changes released in the following Technical Newsletter:

GN28-2612 (dated July 23, 1975)

This edition applies to release 21.7 of IBM System/360 Operating System and to all subsequent releases until otherwise indicated in new editions or Technical Newsletters. Changes are continually made to the information herein; before using this publication in connection with the operation of IBM systems, consult the latest *IBM System/360 Bibliography*, GA22-6822, for the editions that are applicable and current.

Requests for copies of IBM publications should be made to your IBM representative or to the IBM branch office serving your locality.

A form for readers' comments is provided at the back of this publication. If the form has been removed, comments may be addressed to IBM Corporation, Publications Development, Department D58, Building 706-2, PO Box 390, Poughkeepsie, N.Y. 12602. Comments become the property of IBM.

This publication describes the facilities provided with the job control language and contains the information necessary to code job control language statements. It is intended for use by both the experienced and inexperienced JCL user.

This publication is the result of merging the Job Control Language User's Guide, GC28-6703, into the Job Control Language Reference, GC28-6704. It is a reference book with some introductory material for programmers inexperienced with JCL. All information in this book applies to MFT and MVT configurations of the control program, unless otherwise noted.

This publication consists of five parts preceded by a general introduction:

- Programming notes, which contain coding conventions used in coding job control language statements.
- Job control language statements, which describe the format of each statement and the format of the parameters associated with the statement. There is a separate section for each statement.
- Appendixes, which include additional information on the job control language facilities, such as how to write and use cataloged procedures, and what default values are provided when certain parameters are not coded.
- 4. Glossary, which contains definitions of many of the terms used in this publication.
- 5. Foldout charts, which show the format of JOB, EXEC, and DD statement parameters. The foldout charts appear after the index.

Before you read this publication, you should understand the concepts and terminology introduced in the prerequisite publication mentioned below. In addition, the text refers you to other publications for detailed discussions beyond the scope of this publication.

PREREQUISITE PUBLICATION

IBM System/360 Operating System: Introduction, GC28-6534

PUBLICATIONS TO WHICH THE TEXT REFERS

IBM System/360 Operating System:

Data Management for System Programmers, GC28-6550 Utilities, GC28-6586 Operator's Reference, GC28-6691 Operator's Procedures, GC28-6692 Supervisor Services and Macro Instructions, GC28-6646 Data Management Macro Instructions, GC26-3794 MVT Guide, GC28-6720 Storage Estimates, GC28-6551 Tape Labels, GC28-6680 Advanced Checkpoint/Restart, GC28-6708 Programmer's Guide to Debugging, GC 28-6670

Contents Directory

Programming Notes		Notes
JOB Statement		JOB
EXEC Statement		EXEC
DD Statement	· · · · · · · · · · · · · · · · · · ·	DD
Command Statement		Command
Comment Statement		Comment
Delimiter Statement	——	Delimiter
Null Statement		Null
PEND Statement		PEND
PROC Statement		PROC
Appendixes		Appendixes
Glossary	· · · · · · · · · · · · · · · · · · ·	Glossary
Index		Index
Foldout Charts	-	Charts

Contents

	_	
SUMMARY OF AMENDMENTS Release 21.7 . 13	Rules for Coding	53
Release 21	Using the COND Parameter	53
Release 20.1	Examples of the COND Parameter	55
Release 20 16	The MSGCLASS Parameter	56
	Rules for Coding	
THE FORMAT OF THIS PUBLICATION 19	Assigning an Output Class to System	-
This folders of this folders.	Messages	56
INTRODUCTION TO THE JOB	Examples of the MSGCLASS Parameter	
	The MSGLEVEL Parameter	
CONTROL LANGUAGE		
The IBM System/360 Operating System 21	Rules for Coding	5 /
Processing Programs and JCL 21	Requesting Output of Job Control	
The Control Program and JCL 23	Statements and Certain Messages	
Control Program Configurations 24	Examples of the MSGLEVEL Parameter	
Job Control Language Statements 24	The NOTIFY Parameter (For MVT with TSO)	
Job Statement 25	Rules for Coding	59
EXEC Statement 26	What the NOTIFY Parameter Does	59
DD Statement 26	What is Time Sharing	59
Delimiter and Null Statements 27	Example of the NOTIFY Parameter	59
PROC and PEND Statements 27	The PRTY Parameter	
Comment Statement	Rules for Coding	
Command Statement	What the PRTY Parameter Does	
Defining Your Job 29	The PRTY Parameter and Time-Slicing .	
Cataloged and In-Stream Procedures 31	Examples of the PRTY Parameter	
Processing Your Job	The RD Parameter	
Capabilities of the Job Control	Rules for Coding	
Language	Using the Restart Facilities	
ADADIOU T. DOGDINGTNA NOMIA	Defining Restart	0 4
SECTION I: PROGRAMMING NOTES 35	Examples of the RD Parameter	63
Fields in Control Statements 36	The REGION Parameter - Without Main	
Parameters in the Operand Field 37	Storage Hierarchy Support (For MVT)	64
Continuing Control Statements 38	Rules for Coding	
Backward Reference 40	Requesting Main Storage	64
Concatenating Data Sets 40	Acquiring Additional Main Storage	64
Character Sets 41	Examples of the REGION Parameter	64
Using Special Characters 42	The REGION Parameter - With Main	
Coding Form	Storage Hierarchy Support (For MVT,	
•	Excluding M65MP)	65
SECTION II: THE JOB STATEMENT 45	Rules for Coding	
Job Statement Format 45	Requesting Main Storage in One or Two	
Rules for Coding 45	Hierarchies	65
Positional and Keyword Parameter 46	Acquiring Additional Main Storage	
Sample JOB Statements 47	Examples of the REGION Parameter	
Assigning a Johname 48	The RESTART Parameter	
Examples of Valid Johnames 48	Rules for Coding	67
Accounting Information Parameter 49	When to Code the RESTART Parameter	
		0 /
Rules for Coding	Rules for Referencing Generation	
Supplying Information Parameters 49	Data Sets and Using Backward	
Examples of the Accounting Information	References	68
Parameter 50	Examples of the RESTART Parameter	
Programmer's Name Parameter 51	The ROLL Parameter (For MVT)	
Rules for Coding 51		70
When to Code the Programmer's Name	When to Code the ROLL Parameter	
Parameter 51	Examples of the ROLL Parameter	70
Examples of the Programmer's Name	The TIME Parameter	71
Parameter		71
The CLASS Parameter 52	Specifying a Time Limit for the Job	
Rules for Coding 52	Time Limit for Wait States	71
Assigning a Job Class to Your Job 52	How to Eliminate Timing	
The CLASS Parameter and Time-Slicing . 52	Examples of the TIME Parameter	72
Examples of the CLASS Parameter 52	The TYPRUN Parameter (For MFT, MVT)	73
The COND Parameter 53	Holding a Job	73

Example of the TYPRUN Parameter 73	The ROLL Parameter (For MVT)
SECTION III: THE EXEC STATEMENT 75	Rules for Coding
EXEC Statement Format	When you gall a gataland Danadana 00
	When You Call a Cataloged Procedure . 98
Rules for Coding	Examples of the ROLL Parameter 99
Positional and Keyword Parameter 76	The TIME Parameter
Sample EXEC Statements	Rules for Coding
Assigning a Stepname	Specifying a Time Limit for a Job Step .100
Examples of Valid Stepnames	Time Limit for Wait States
The PGM Parameter 78	How to Eliminate Timing
Identifying the Program to be Executed . 78	How the Job Time Limit Affects the
Temporary Library	Step Time Limit
System Library	When You Call a Cataloged Procedure .101
	Examples of the TIME Parameter
TIIVate Dibiary.	Examples of the lime ratameter
inc in incident in the inciden	
Examples of the PGM Parameter	
The PROC Parameter 81	
Identifying the Cataloged or In-Stream	SECTION IV: THE DD STATEMENT
Procedure to be Called 81	DD Statement Format
Examples of the PROC Parameter 81	Rules for Coding
The ACCT Parameter 82	Positional and Keyword Parameters 104
Rules for Coding 82	Sample DD Statements
Providing Accounting Information for a	Assigning a Ddname
Job Step or Procedure Step 82	When Adding or Overriding
our pool of the contract pool of the contract	
	Information in a Cataloged Procedure
The COND Parameter	Step
Rules for Coding 83	Examples of Valid Ddnames
Using the COND Parameter 84	Special Ddnames
Bypassing a Job Step 84	JOBLIB
Executing a Job Step 84	Rules for Coding the JOBLIB DD
When You Call a Cataloged Procedure . 85	Statement
Examples of the COND Parameter 85	The DISP Parameter 109
The DPRTY Parameter (For MVT) 87	
Rules for Coding	
Assigning a Dispatching Priority 87	
The DPRTY Parameter and Time-Slicing . 88	
When You Call a Cataloged Procedure . 88	Statement
Examples of the DPRTY Parameter 88	Examples of the JOBLIB DD Statement 110
The PARM Parameter	
Rules for Coding 89	Rules for Coding the STEPLIB DD
Providing a Processing Program With	Statement
Information at Execution Time 89	When the Library Is Cataloged 112
When You Call a Cataloged or	When the Library Is Not Cataloged
In-Stream Procedure 89	
Examples of the PARM Parameter 90	
The RD Parameter 91	Previous Step
Rules for Coding 91	Concatenating Libraries 113
Using the Restart Facilities 91	
Defining Restart 92	
When You Call a Cataloged Procedure . 92	•
Examples of the RD Parameter 93	SYSABEND and SYSUDUMP
The REGION Parameter - Without Main	Writing the Dump to a Unit Record
Storage Hierarchy Support (For MVT) 94	Device
Rules for Coding 94	
Requesting Main Storage 94	
Acquiring Additional Main Storage 94	
When You Call a Cataloged Procedure . 94	
Examples of the REGION Parameter 95	
The REGION Parameter - With Main	Statement
Storage Hierarchy Support (For MVT,	When the Checkpoint Data Set Is
Excluding M65MP) 96	
Rules for Coding 96	When the Checkpoint Data Set Is
Requesting Main Storage in One or Two	Not Cataloged
Hierarchies 96	
Acquiring Additional Main Storage • • 97	The * Parameter
When You Call a Cataloged Procedure 97	
Examples of the REGION Parameter 97	
	non-riverial name with other personal and a strong

The DCB Subparameters BLKSIZE,		When You Specify CATLG as the	
BUFNO, and DIAGNS	119	Disposition	72
Examples of the * Parameter	119	When You Specify UNCATLG as the	
The DATA Parameter		Disposition	73
Rules for Coding		Specifying a Conditional Disposition	
Defining Data in the Input Stream		for the Data Set	73
The DCB Subparameters BLKSIZE,		When You Specify DELETE as the	
BUFNO, and DIAGNS	122	Conditional Disposition	73
Examples of the DATA Parameter		When You Specify KEEP as the	
The DUMMY Parameter	124	Conditional Disposition 17	74
Rules for Coding	124	When You Specify CATLG as the	, -
What the DUMMY Parameter Does		Conditional Disposition 17	71
Coding the DUMMY Parameter			, -
Examples of the DUMMY Parameter		When You Specify UNCATLG as the	71
The DYNAM Parameter		Conditional Disposition 17 Examples of the DISP Parameter	76
		The DLM Parameter	70
Rules for Coding	126	Rules for Coding	, , , ,
What the DYNAM Parameter Does			
Coding the DYNAM Parameter		What the DLM Parameter Does	
Example of the DYNAM Parameter		Examples of the DLM Parameter	
The AFF Parameter		The DSNAME Parameter	79
Rules for Coding	127	Rules for Coding	19
Optimizing Channel Usage	,127	Identifying the Data Set 18	80
Requesting Channel Separation	127	Creating or Retrieving a Nontemporary	~ ~
Example of the AFF Parameter		Data Set	80
The DCB Parameter		Nontemporary Data Set	
Rules for Coding		Members of a Partitioned Data Set . 18	8 T
Completing the Data Control Block		Generations of a Generation Data	
DCB Macro Instruction	130	Set	81
DCB Parameter	. T 2 T	Areas of an Indexed Sequential	~ ~
Data Set Label	.131	Data Set	82
Specifying DCB Information on the DD		Creating or Retrieving a Temporary	
Statement	.131	Data Set	82
Supplying DCB Keyword Subparameters .	.131	Temporary Data Sets	82
Copying DCB Information From a Data		Members of a Temporary Partitioned	
Set Label	. 131	Data Set	83
Copying DCB Information From an	1 2 2	Areas of a Temporary Indexed	
Earlier DD Statement		Sequential Data Set	83
Glossary of DCB Subparameters		Using a Dedicated Data Set 18	84
Examples of the DCB Parameter		Copying the Data Set Name From an	
The DDNAME Parameter		Earlier DD Statement	84
Rules for Coding	162	Specifying the DSNAME Parameter in	0.4
What the DDNAME Parameter Does	.162	Apostrophes	0 5
When You Code the DDNAME Parameter	.162	Examples of the DSNAME Parameter 1	80
The DCB Subparameters BLKSIZE,		The FCB Parameter	00
BUFNO, and DIAGNS	. 164	Rules for Coding	00
Examples of the DDNAME Parameter		Image Identifier	80
The DISP Parameter		Requesting Alignment of Forms 1	80
Rules for Coding		Requesting Operator Verification 1	00
What the DISP Parameter Does		Examples of the FCB Parameter	8/
Specifying the Data Set's Status	. 167	The LABEL Parameter	88
When you Specify NEW as the Data		Rules for Coding	89
Set's Status	.168	Data Set Labels	89
When You Specify OLD as the Data		When to Code the LABEL Parameter 19	90
Set's Status	.168	The Data Set Sequence Number	
When You Specify SHR as the Data		Subparameter	90
Set's Status	.168	The Label Type Subparameter 19	91
When You Specify MOD as the Data		The PASSWORD and NOPWREAD	
Set's Status	.169	Subparameters	92
Specifying a Disposition for the Data		The IN and OUT Subparameters	93
Set	.170	The RETPD and EXPDT Subparameters 19	93
When You Specify DELETE as the		Examples of the LABEL Parameter 1	<u>ع</u> 4
Disposition	•171	The OUTLIM Parameter	95
When You Specify KEEP as the		Rules for Coding	75
Disposition	.171	What the OUTLIM Parameter Does 19	y 5
When You Specify PASS as the		Determining the Output Limit	y 5
Disposition	•171	Example of the OUTLIM Parameter 19	95

The QNAME Parameter MFT and MVT	The UNIT Parameter
with TCAM	Rules for Coding
Rules for Coding	Providing Unit Information
What the QNAME Parameter Does 196	Identifying the Device
Example of the QNAME Parameter 196	Unit Address
The SEP Parameter	Device Type
Rules for Coding	Group Name
Requesting Channel Separation 197	Unit Count
Example of the SEP Parameter	Parallel Mounting
The SPACE Parameter	Poformed Mounting
Rules for Coding	Deferred Mounting
	Unit Separation
Requesting Space for a Data Set 200	Unit Affinity 234 Examples of the UNIT Parameter 234
Specifying the SPACE Parameter 201 Letting the System Assign Specific	
	The VOLUME Parameter
Tracks	Rules for Coding
Specifying the unit of measurement 201	Providing Volume Information
Specifying a Primary Quantity 202	Specific Volume Request 237
Secondary Quantity	Nonspecific Volume Request 238
Requesting Space for a Directory or	The PRIVATE Subparameter
Index	When PRIVATE Is Not Coded 238
Releasing Unused Space RLSE 204	The RETAIN Subparameter 239
Specifying the Format of Allocated	The Volume Sequence Number
Space CONTIG, MXIG, or ALX 205	Subparameter
Allocating Whole Cylinders ROUND 205	The Volume Count Subparameter 240
Assigning Specific Tracks	Supplying Volume Serial Numbers (SER) 240
Examples of the SPACE Parameter 206	Referring the System to an Earlier
The SPLIT Parameter	Specific Volume Request (REF) 241
Rules for Coding	Volume Affinity
Requesting Space for a Data Set 210	Volume States
Specifying the SPLIT Parameter 210	The Mount and Use Attributes 243
Requesting Space in Units of	Nonsharable Attribute
Cylinders	Satisfying Specific Volume Requests . 247
Requesting Space in Units of	Satisfying Nonspecific Volume
Blocks	Requests
Examples of the SPLIT Parameter 211	Examples of the VOLUME Parameter 248
The SUBALLOC Parameter	SECTION V: THE COMMAND STATEMENT 265
Requesting Space for a Data Set 214	The Command Statement Format
Specifying the SUBALLOC Parameter 214	Rules for Coding
Specifying the Unit of Measurement 215	Commands That Can Be Entered Through
Specifying a Primary Quantity 215	3 ·
Identifying the Original Data Set 215	the Input Stream
Specifying a Secondary Quantity 215	MVT
Requesting Space for a Directory 216	Example of the Command Statement 268
Examples of the SUBALLOC Parameter 216	Drample of the command beatement 200
The SYSOUT Parameter	SECTION VI: THE COMMENT STATEMENT 269
Rules for Coding	The Comment Statement Format 269
Advantages to Coding the SYSOUT	Rules for Coding
Parameter	Output Listings 269
The Classname	Example of the Comment Statement 269
The Program Name	
The Form Number	SECTION VII: THE DELIMITER STATEMENT . 271
Coding Other Parameters With the	The Delimiter Statement Format 271
SYSOUT Parameter	Rules for Coding
Job Separators	Example of the Delimiter Statement 271
Examples of the SYSOUT Parameter 220	
The TERM Parameter MVT and TSO 222	SECTION VIII: THE NULL STATEMENT 273
Rules for Coding	The Null Statement Format 273
What the TERM Parameter Does	Example of the Null Statement 273
Example of the TERM Parameter	
The UCS Parameter	SECTION IX: THE PEND STATEMENT 275
Rules for Coding	The PEND Statement Format 275
Special Character Sets	Rules For Coding 275
Identifying the Character Set 224	Examples of the PEND Statement 276
Requesting Fold Mode	_
Requesting Operator Verification 225	SECTION X: THE PROC STATEMENT 277
Examples of the UCS Parameter 225	The PROC Statement Format

Rules for Coding	Creating an Indexed Sequential Data Set 311 The DSNAME Parameter
to a Symbolic Parameter 278	The UNIT Parameter
Example of the PROC Statement 279	The VOLUME Parameter
	The LABEL Parameter
SECTION XI: APPENDIXES 281	The DCB Parameter
ADDENDIN A. CAMALOGED AND IN-CORRAM	The DISP Parameter
PROCEDURES	The SPACE Parameter
FROCEDORES	Absolute Track Technique
USING CATALOGED AND IN-STREAM	The SEP or AFF Parameter
PROCEDURES	Area Arrangement of an Indexed
How To Call a Cataloged Procedure 284	Sequential Data Set
How to Call An In-stream Procedure 284	Retrieving an Indexed Sequential Data
Assigning Values to Symbolic Parameters 285	Set
Nullifying a Symbolic Parameter 287	The DSNAME Parameter
Example of Assigning Values to Symbolic Parameters	The UNIT Parameter
Overriding, Adding, and Nullifying	The DCB Parameter
Parameters on an EXEC Statement 289	The DISP Parameter
Overriding EXEC STATEMENT Parameters . 289	Example of Creating and Retrieving an
Adding EXEC STATEMENT Parameter 291	Indexed Sequential Data Set 318
Nullifying EXEC STATEMENT Parameters . 291	
Examples of Overriding, Adding, and	APPENDIX D: CREATING AND RETRIEVING
Nullifying Parameters on an EXEC	GENERATION DATA SETS
Statement	Before You Define the First Generation
Overriding, Adding, and Nullifying Parameters on a DD Statement	Data Set
Overriding DD STATEMENT Parameters	Referring the System to a
Adding DD Statement Parameters 295	Cataloged Data Set 320
Nullifying DD STATEMENT Parameters 295	Creating a Generation Data Set 320
Examples of Overriding, Adding, and	The DSNAME Parameter
Nullifying Parameters on a DD Statement 296	The DISP Parameter 321
Overriding DD Statements That Define	The UNIT Parameter
Concatenated Data Sets	The VOLUME Parameter
Adding DD Statements to a Procedure 298 Examples of Adding DD Statements to a	The SPACE Parameter
Procedure	The DCB Parameter
1100000010	Retrieving a Generation Data Set 322
WRITING PROCEDURES: CATALOGED AND	The DSNAME Parameter
IN-STREAM	The DISP Parameter
Why Catalog Job Control Statements 301	The UNIT Parameter
Why Use In-Stream Procedures 301	The LABEL Parameter
The Contents of Cataloged And	The DCB Parameter
In-stream Procedures 301 Using Symbolic Parameters in a	Resubmitting a Job for Restart 323 Examples of Creating and Retrieving
Procedure 302	
Adding and Modifying Cataloged	Generation Data Sets
Procedures	APPENDIX E: DEFAULT PARAMETER VALUES
	SUPPLIED IN THE INPUT READER PROCEDURE . 325
APPENDIX B: USING THE RESTART	How To Keep Track of the Default
FACILITIES	Values and Restrictions 325
Restarts	
Automatic Step Restart 305	APPENDIX F: A CHECKLIST 327
Automatic Checkpoint Restart 305 Deferred Step Restart 305	Examples
Deferred Checkpoint Restart	SECTION XII: GLOSSARY
Examples of Using the Restart	PROTION WITH GROUPHIT
Facilities	INDEX
300	
APPENDIX C: CREATING AND RETRIEVING	SECTION XIII: CONTROL STATEMENT
INDEXED SEQUENTIAL DATA SETS 311	FOLDOUT CHARTS

Figures

Figure 1. Processing Programs 22	Figure 26. Parameters for Creating a
Figure 2. Job Management 23	Data Set
Figure 3. Defining Job Boundaries 26	Figure 27. Creating a Data Set on a
Figure 4. Defining Job Step	Unit Record Device (Card Punch or
Boundaries 28	Printer)
Figure 5. Your Job 30	Figure 28. Creating a Data Set on a
Figure 6. Control Statement Fields . 36	System Output Device 252
Figure 7. Character Sets 41	Figure 29. Creating a Data Set on a
Figure 8. Coding Form for Coding	Magnetic Tape (Part 1 of 2) 253
Control Statements 43	Figure 30 Creating a Data Set on
Figure 9. How the Data Control Block	Direct Access Devices (Part 1 of 3) 255
is Filled	Figure 31. Retrieving an Existing
Figure 10. DCB Subparameters for Card	Data Set from a Unit Record Device
Punch	(Card Reader or Paper Tape Reader) 258
	Figure 32. Retrieving a Data Set
Figure 11. DCB Subparameters for	7
Printer	from the Input Stream
	Set (Magnetic Tape or Direct Access) . 259
Creating a Data Set on Magnetic Tape . 153	Doc (1189110010 nmpo 01
Figure 13. DCB Subparameters for	Figure 34. Retrieving a Cataloged
Creating a Sequential Data Set on	Data Set (Magnetic Tape or Direct
Direct Access Devices 154	1.00000, 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
Figure 14. DCB Subparameters for	Figure 35. Retrieving a Kept Data
Creating a Direct Data Set155	Set (Magnetic Tape or Direct Access) . 261
Figure 15. DCB Subparameters for	Figure 36. Extending a Passed Data
Creating a Partitioned Data Set 156	Set (Magnetic Tape or Direct Access) . 262
Figure 16. DCB Subparameters for	Figure 37. Extending a Cataloged
Card Reader	Data Set (Magnetic Tape or Direct
Figure 17. DCB Subparameters for	Access)
Paper Tape Reader 158	Figure 38. Extending a Kept Data Set
Figure 18. DCB Subparameters for	(Magnetic Tape or Direct Access) 264
Retrieving a Data Set on Magnetic	Figure 39. Postponing Definition of a
Tape	Data Set 264
Figure 19. DCB Subparameters for	Figure 40. Area Arrangement of
Retrieving a Sequential Data Set on	Indexed Sequential Data Sets 316
Direct Access Device 160	Figure 41. Default Values and
Figure 20. DCB Subparameters for	Restrictions Supplied in the Input
Retrieving a Direct Data Set 161	Reader Procedures 326
Figure 21. DCB Subparameters for	Figure 42. A Checklist (Part 1 of 3) . 327
Retrieving a Partitioned Data Set 161	Figure 43. Job Statement Chart
Figure 22. Disposition Processing	(Foldout)
Chart	Figure 44. Execute Statement Chart
Figure 23. Direct Access Capacities 207	(Foldout)
Figure 24. Track Capacities 208	Figure 45. Data Definition Statement
Figure 25. Combinations of Mount and	Chart (Foldout) 361
Use Attributes	

Summary of Amendments

Summary of Amendments for GC28-6704-3 OS Release 21.7

ISAM Data Sets

Volume specifications for duplicate DSNAME.

Symbolic Parameters

- Quotes in the PARM field.
- Length cannot exceed 120 characters.

* Parameter

- Addition to rule 4 for syntax checking.
- Use of keywords DLM and DIAGNS.

COND Parameter

Caution for use of ONLY.

DCB Parameter

- AL and AUL headings assume DCB=OPTCD=Q.
- DEN=0 on 7-track 3240 will result in 556 bpi recording density.
- ASB reader cannot process the DDNAME parameter for instream procedures.
- When specifying PASS, code the DCB parameter or a backward reference to the DCB information.
- DCB=dsname only permitted when DISP=OLD.

DISP Parameter

- Specifying MOD.
- Exclusive control of data set name.
- Specifying CATLG.
- Uncataloging of tape generation data sets that were never opened.
- Reference to Appendix C.

MOD

Specifying MOD.

SPACE, VOLUME, and UNIT **Parameters**

- Allocation of space.
- Retain subparameter (volume remains mounted until end of job, except for tape).
- Processing multivolume data sets.
- Volume reference for a backward reference on a DD statement.
- Specifying primary and secondary quantities. Cataloged data sets.
- Extending a data set (UNIT parameter).
- Unit affinity and separation.
- Releasing unused space.
- Extending data sets.
- Other minor changes.

Appendix A

- Additional examples.
- Mutually exclusive keywords are allowed during override.

Appendix B

Retrieving a generation data set.

Appendix C

How space for index area of an ISAM file is occupied.

Appendix D

- Creating a generation data set.
- The DSNAME parameter.
- Relative generation numbers.

Summary of Amendments for GC28-6704-2 OS Release 21

The Release 21 changes listed below are described in this manual. They are indicated in the text by a vertical line to the left of the change.

DOS Emulator Scheduler Support

New Programming Feature: The DLM parameter is now available on the DD * or DD DATA statement. If the DLM parameter is coded, the delimiter terminating the group of data is the value assigned in the DLM parameter.

DOS/OS Interchange Environment

New Programming Feature: The LTM subparameter of the LABEL parameter allows use of Disc Operating System (DOS) unlabeled tapes with the System/360 Operating System without modifying the tape.

Specification Change: The value "H" coded with the OPTCD parameter under DOS requests the system to check for and bypass any DOS checkpoint records on the tape.

OPEN/CLOSE/EOV Trace Feature

New Programming Feature: The DCB subparameter DIAGNS requests the OPEN/CLOSE/EOV trace option. The trace option gives a module-by-module trace of the OPEN/CLOSE/EOV routines' workarea and the user's DBC.

3505/3525 Card Reader/Punch

New Programming Feature: The FUNC subparameter of the DCB parameter specifies the type of data set to be opened for the 3505/3525 card Read/Punch. The punch unit also interprets the cards punched.

Specification Change: The MODE subparameter of the DCB parameter has been extended to include the 3505/3525 card read/punch.

Reorganization of Publication

This is a combination of topics previously covered in the <u>JCL User's</u> Guide, GC28-6703, and the <u>JCL Reference</u>, GC28-6704, prior to Release 21.

Miscellaneous Changes

New Sections: The "Introduction", the DCB subparameter tables, and the "Summary of the DD Statement" are all new additions to the manual.

Rewritten Sections: The discussion of the COND parameter on the JOB card has been rewritten for increased clarity.

New Devices Included: The following devices are new for Release 21; the 3420/3803 Magnetic Tape Subsystem, the 3410 Magnetic Tape Device, the 3505 Card Reader, the 3525 Card Punch, the 3277 Display Station, the 3284 Printer, and the 3286 Printer.

Glossary: Some additions and amendments have been made to reflect the new and changed material in the publication.

Summary of Amendments for GC28-6704-1 OS Release 20.1

The Release 20.1 changes listed below are described in this manual.

Item	Description
Support for 2305-1, 2305-2, 2319, and 3330	The 2305-1, 2305-2, 2319, and 3330 direct access devices have been added to the section on the UNIT parameter. Z, a character coded in the subparameter OPTCD of the DCB parameter, has an additional meaning when referring to input from a direct access storage device.
Support for 3211	The 3211 printer has been added to the section on the UNIT parameter. FCB, a new parameter to be coded on the DD statement, allows you to specify forms control information. The UCS parameter can also be coded for the 3211; character set codes to be specified in the UCS parameter for the 3211 printer have also been added.
Removal of PCP information	All references to the Primary Control Program have been removed. All information in this manual now applies to systems with MFT or MVT, unless restrictions are specifically noted.

Summary of Amendments for GC28-6704-0 as updated by GN28-2451 OS Release 20

Item	Description
ASCII Support	All references to USASCII have been changed to ASCII (American Standard Code for Information Interchange). In the DCB subparameter BLKSIZE, you can specify the minimum and maximum lengths for blocks of ASCII records on magnetic tape. D and DB can be specified as values for the RECFM subparameter of the DCB parameter; D means that the ASCII records are of variable length and DB means that the ASCII records are of variable length and that they are blocked. A new DCB subparameter BUFOFF allows you to specify a buffer offset for a block of one or more ASCII records on magnetic tape. Q can be specified as a value for the DCB subparameter OPTCD; Q specifies that translation from ASCII input to EBCDIC is required or that translation from EBCDIC to ASCII output is required. AL and AUL are new values for the LABEL parameter; AL specifies that the data set has American National Standard labels and AUL specifies that the data set has American Standard labels and AMERICAN National Standard User labels.
Dynamic Allocation Support for TSO	DYNAM, a new DD statement parameter, allows you to defer definition of a data set until you require it.
NOTIFY Parameter	NOTIFY, a new JOB statement parameter, indicates to the system that you are requesting that a message be sent to your time sharing terminal when your background job completes.
NOPWREAD Subparameter	NOPWREAD, a new subparameter of the LABEL parameter, specifies that a data set can be read without a password, but that the operator must give the password before the data set can be written in or deleted.
TERM Parameter	TERM, a new DD statement parameter, allows you to identify a job as a time-sharing task.
155/165 Model Dependency	3210 and 3215 printer-keyboards have been added to the section on the UNIT parameter.

(Continued)

OS Release 20 (Continued)

TCAM (Telecommuni-	QNAME, a new parameter for the DD statement, allows you to access messages received by means of TCAM for processing by an application program. Seven new subparameters have been added to the DCB parameter: BUFIN, BUFOUT, BUFMAX, BUFSIZE, PCI, RESERVE, THRESH. In addition, five other subparameters of the DCB parameter may also be used with TCAM: BLKSIZE, BUFL, LRECL, OPTCD, RECFM.
Input/Output Recovery Management Support	The command SWAP has been deleted from the list of commands that can be coded on the command statement.

The Format Of This Publication

This publication is designed for easy reference. The Introduction to this publication contains information that is common to all job control language statements; for instance, one of the topics in this section is how to continue a field onto another control statement. You may want to review the Introduction from time to time.

Section I contains programming notes. This section includes a discussion of format conventions used in this book to describe job control language parameters.

Sections II through X contain descriptions and examples of the different control statements. The job control statements are described in the following order:

- II. The JOB statement.
- III. The EXEC statement.
- IV. The DD statement.
 - V. The command statement.
- VI. The comment statement.
- VII. The delimiter statement.
- VIII. The null statement.
 - IX. The PEND statement.
 - X. The PROC statement.

Each statement description includes the purpose and rules for coding a statement. The JOB, EXEC, and DD statements are described first, in the order in which they normally appear in the input stream. The remaining statements are described in alphabetical order.

The statement description for the JOB, EXEC, and DD statements is followed by a chapter on assigning a name in the name field of the statement and a chapter for each positional and keyword parameter that can be coded on the statement. The chapters on positional parameters appear before the chapters on keyword parameters. Both positional and keyword parameters are described in alphabetical order.

The format of the positional or keyword parameter appears at the beginning of the chapter. Each subparameter is then described briefly. The text following the format description of the parameter describes the purpose of the parameter and each subparameter. Each chapter ends with examples of the use of the parameter and its subparameters.

Section XI consists of Appendixes A through F. These appendixes include:

- 1. Appendix A: Cataloged and In-stream Procedures
- 2. Appendix B: Using the Restart Facilities
- 3. Appendix C: Creating and Retrieving Indexed Sequential Data Sets

- 4. Appendix D: Creating and Retrieving Generation Data Sets
- 5. Appendix E: Default Parameter Values Supplied in the Input Reader Procedure
- 6. Appendix F: A Checklist

Section XII is a glossary of terms used in this publication.

Section XIII, which follows the index, is a set of foldout charts. These charts summarize syntax of JOB, EXEC, and DD statement parameters.

Introduction to the Job Control Language

The IBM System/360 Operating System was designed to meet the many diverse needs of the computer user. Data processing needs differ greatly from one installation to another and between individual users within an installation. The purpose of the operating system is to aid you in getting your work done. It achieves its purpose by managing all available resources, including the central processing unit, main storage, input/output devices, and any programs that are a part of the system. To use the operating system, you must describe to the system the work you want done and the resources you will need. You provide the operating system with this information through use of the job control language.

The job control language, commonly referred to as JCL, consists of nine control statements. On these control statements, you code information to be used by the operating system to direct the execution of the programs you have written. The programs you write are called source programs (or source modules). Your source program and the JCL statements needed to describe what the operating system is to do for you, together with whatever related data you may have, constitute a job. Every job submitted for execution by the operating system must include JCL statements. The design and coding of the JCL portion of your job can require a considerable amount of time.

The job control language is a very flexible language and with this flexibility come many optional features. You should become familiar enough with the language to be able to decide what information the operating system will need to process your job and which features of the language will aid you in getting your job done most efficiently.

The IBM System/360 Operating System

An IBM System/360 Operating System consists of a control program together with a number of optional processing programs such as language translators, utility programs, and a sort/merge program. The purpose of the control program is to efficiently schedule, initiate, and supervise the work performed by the computing system. The processing programs (see figure 1) are designed to help you program solutions to problems and design new applications. They do this by giving you a combination of programming aids, services, and precoded routines that you can use with whatever programming language you choose.

PROCESSING PROGRAMS AND JCL

You can use the processing programs provided by IBM singly or in combination to process your job. The IBM processing programs available for your use can be supplemented with programs written by you or others at your installation. The IBM processing programs are classified as either language translators or service programs (see figure 1).

The language translators enable you to write a problem solution or an application in a language that can be more readily learned and more easily used than the strictly numerical machine language of the computing system. IBM provides six language translators (see Figure 1). The language translators create machine language programs based upon computer programs written in higher-level languages. All higer-level language translators are called compilers. The assembler is a low-level language translator. That is, each assembler statement translates into

one machine instruction. A compiler generates one or more machine instructions for each higher-level language statement. This process is known as compilation (or assembly in the case of the assembler). The machine language program that is produced from a source program is called an object module.

Processing	Programs
Language Translators	Service Programs
ALGOL Assembler COBOL FORTRAN PL/I RPG	Linkage Editor Loader Sort/Merge TESTRAN Data set utilities System utilities Independent utilities

Figure 1. Processing Programs

The linkage editor is one of the service programs. It combines object modules that have been individually compiled or assembled. The result is a <u>load module</u>. A load module is one ready to be loaded into main storage and executed. Another service program you can use to accomplish link editing is the loader. It combines linkage editing and execution by loading object modules produced by the language translators and load modules produced by the linkage editor into main storage for execution. Other service programs supplied to aid in processing jobs are the sort/merge program and the utility programs. The sort/merge program is a generalized program that can be used to sort or merge fixed- or variable-length records in ascending or descending order. The utility programs are divided into three subsets: data set, system, and independent utilities. Data set utilities are designed to help you in the manipulation of data. They aid you in doing such things as transferring, copying, or merging sets of data from one I/O device onto another. The system utilities are used to change or extend the indexing structure of the system library catalog and to print an inventory of the data and programs that are cataloged in the system library. Independent utilities are used chiefly by the system programmer to prepare direct access storage for use under the operating system.

In order to use the processing programs you simply request the particular program you want by coding the name of the program on a job control language statement. For example, you may write a program in COBOL to process insurance premium payments. Your program must be compiled (translated into machine language) and linkage edited before it can be executed. This means that your job will be organized into three parts. The parts of a job are known as job steps and, in this case, you would have three job steps.

In the first step, you code the name of the COBOL compiler you are requesting on a JCL statement. In this step, you also include JCL statements to describe any data sets that the compiler requires. The COBOL compiler will translate your source program into machine instructions and produce an object module. In the next step, you use a JCL statement to request the linkage editor. Again you include JCL statements to describe any data sets that may be required by the linkage editor. The linkage editor uses the object module as its input data and produces a load module. A load module is the executable form of a program. In the last step, you request that your program (the load

module form) be executed. You will have to describe any data sets that will be used by your program (such as the actual insurance premiums and the master file) and where the output of the job step is to go.

THE CONTROL PROGRAM AND JCL

The control program must perform three functions: job management, task management, and data management.

- Job management involves reading and interpreting job control language statements, scheduling jobs, initiating and terminating jobs and job steps, and recording job output data.
- Task management monitors and controls the entire operating system, and is used throughout the operation of both the control program and processing programs.
- Data management's purpose is to simplify storage, retrieval, and maintenance of all data, regardless of the way it is organized.

Through the use of job control language (JCL), you communicate with the job management area of the control program and specifically with the job scheduler. Figure 2 gives you a brief summary of the components of job management and a synopsis of what each component does. JCL statements indicate to the job scheduler the work you want done. With JCL statements, you tell the job scheduler at what point your job begins, the name of your job, how you organized your job, where your data is, the programs you want executed, and the main storage requirements of those programs.

MASTER SCHEDULER JOB SCHEDULER Relays messages to and from Reader/Interpreter the system to or from the operator. • Reads and analyzes job control Statements from the input • Executes operator commands. stream. • Responds to replies from the • Places information contained operator. in the job control statements into a series of tables. • Starts and stops the Initiator/Terminator reader/interpreter, initiator/terminator, and • Allocates resources required the output writer tasks. to perform a step of the job. • Loads and transfers control to the program that is to be executed to perform the job step. • Terminates the job step when execution of the program is completed. • Selects a job from the input work queue. Output Writer • Controls the writing of job output data.

Figure 2. Job Management

The job scheduler consists of three areas: the reader/interpreter, the initiator/terminator, and the output writer. The reader/interpreter reads and analyzes your job control statements. It checks to make sure that you have not made errors in coding your statements. The reader/interpreter places the information contained in the job control statements into a series of tables for system use. The initiator/terminator assigns to each step of your job the resources that you have requested, notifying the operator of any tapes or disk packs that have to be mounted. A job step is a logical division of your job. Each step is associated with one processing program or procedure, and related data. A job consists of one or more job steps.

After the initiator/terminator has assigned the requested resources to a job step, it requests the supervisor program, a part of task management, to initiate the execution of the program you have specified in your job step. When the program is completed, the initiator/terminator terminates the job step, releasing the resources assigned to the step and, thereby, making them available for use by other job steps. After the execution of the last step in your job, the output writer records the output of your job. Your output is directed to the device you have specified in your JCL.

Control Program Configurations

There are two configurations of the control program:

- MFT -- multiprogramming with a fixed number of tasks.
- MVT -- multiprogramming with a variable number of tasks.

The MFT control program reads jobs in sequential order from up to three input streams concurrently. Up to 15 job steps, from 15 different jobs, can be performed simultaneously. The MFT control program can also concurrently record as many as 36 streams of job output.

The MVT control program reads one or more input streams of jobs and schedules the jobs in order of priority (you assign priority). Up to 15 independent jobs can be performed concurrently. Job steps within a single job are performed in sequential order because one step may depend on the completion of another. Within a job step, any number and type of data processing tasks can be initiated. The MVT control program can concurrently record job system output on as many as 36 devices.

The job control language statements are basically the same for the two configurations, but some parameters coded on the statements are not meaningful for both. For example, in both MFT and MVT, you can use a parameter to assign a dispatching priority to a job. In MVT, you can also use a parameter to assign a dispatching priority to a job step. This parameter, however, has no meaning in MFT. All the parameters in this book apply to systems with MFT and MVT unless otherwise noted.

Job Control Language Statements

The nine job control language statements used to describe a job to the system are:

- Job (JOB) statement.
- Execute (EXEC) statement.
- 3. Data definition (DD) statement.

- 4. Delimiter statement.
- 5. Null statement.
- Procedure (PROC) statement.
- 7. Procedure end (PEND) statement.
- 8. Comment statement.
- 9. Command statement.

A job control statement consists of one or more 80-byte records. Most jobs are submitted to the operating system for execution in the form of 80-column punched cards or as card images off direct access devices. The operating system is able to distinguish a job control statement from data included in the input stream. In columns 1 and 2 of all the statements except the delimiter statement, you code //. For the delimiter statement, you code /* in columns 1 and 2 and this notifies the operating system that the statement is a delimiter statement. For a comment statement, you code //* in columns 1, 2, and 3 respectively.

Parameters coded on these JCL statements help the job scheduler to regulate the execution of jobs and job steps, retrieve and dispose of data, allocate I/O resources, and communicate with the operator.

JOB STATEMENT

The job statement (or JOB statement) indicates to the system at what point a job begins (see figure 3). On the JOB statement, you code the name of your job. This name is used to identify messages to the operator and to identify your program output. By using the parameters allowed on the JOB statement, you can provide accounting information for your installation's accounting routines, specify conditions for early termination of your job, assign job priority, request a specific class for job scheduler messages, hold a job for later execution, and limit the maximum amount of time the job may use the central processing unit (CPU). With MVT, you can also specify the amount of main storage to be allocated to the job.

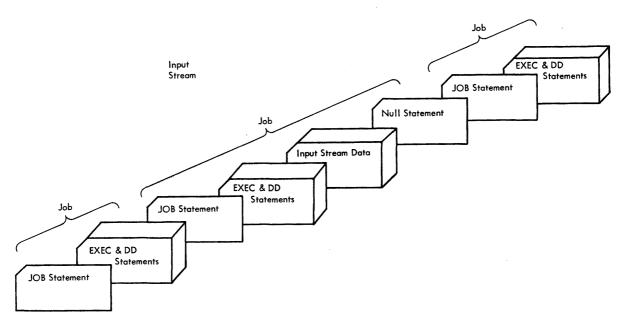


Figure 3. Defining Job Boundaries

EXEC STATEMENT

The EXEC statement marks the beginning of a job step and the end of the preceding step (see figure 4). On the EXEC statement, you identify the program to be executed or the cataloged procedure or in-stream procedure to be called. A cataloged procedure is a set of job control language statements that has been assigned a name and placed in a partitioned data set known as the procedure library.

The EXEC statement can also be used to provide job step accounting information, to give conditions for bypassing or executing a job step, to assign a limit on the CPU time used by a job step, and to pass information to a processing program such as the linkage editor. All this information is communicated to the system by the parameters that you can code on the EXEC statement. In systems with MVT, you can use a parameter to specify the amount of main storage to be allocated to the job step.

DD STATEMENT

A DD statement identifies a data set and describes its attributes. There must be a DD statement for each data set used or created in a job step. The DD statements are placed after the EXEC statement for the step. The parameters of the DD statement provide the system with such information as the name of the data set, the name of the volume on which it resides, the type of I/O device that holds the data set, the format of the records in the data set, whether a data set is old or new, the size of newly created data sets, and the method that will be used to create or access the data set. The name of the DD statement provides a symbolic link between a data set (on data file) named in your program and the actual name and location of the corresponding data set. This symbolic link allows you to relate the data set in your program to different data sets on different occasions.

DELIMITER AND NULL STATEMENTS

The delimiter statement (or /* statement) and null statement (or // statement) are markers in an input stream. The delimiter statement is used to separate data placed in the input stream from any JCL statement that may follow the data. The null statement can be used to mark the end of the JCL statements and data for a job.

PROC AND PEND STATEMENTS

The PROC statement may appear as the first JCL statement in a cataloged or in-stream procedure. For cataloged procedures or in-stream procedures, the PROC statement is used to assign default values to parameters defined in a procedure. An in-stream procedure is a set of job control language statements that appear in the input stream. The PROC statement is used to mark the beginning of an in-stream procedure. The PEND statement is used to mark the end of an in-stream procedure.

COMMENT STATEMENT

The comment statement can be inserted before or after any JCL statement that follows the JOB statement and can contain any information you think would be helpful to you or anyone interested in your program.

COMMAND STATEMENT

The command statement is used to enter commands through the input stream. Commands can activate and deactivate system input and output units, request printouts and displays, and perform a number of other operator functions.

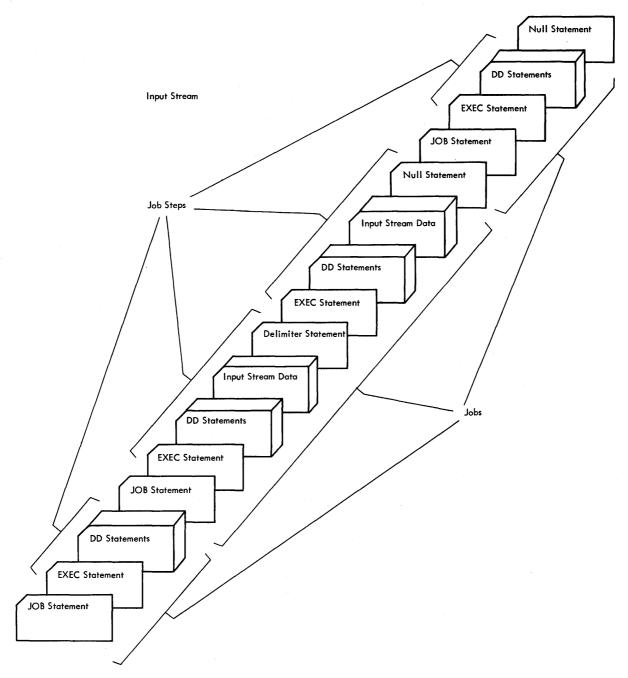


Figure 4. Defining Job Step Boundaries

Defining Your Job

Now that you have been introduced to the nine JCL statements, let us use these statements to define a job. Basically, the statements with which you will be most concerned are the JOB, EXEC, the DD statements. The delimiter and null statements may be used but they are usually unnecessary. That is, the system will provide delimiters by default at the end of the data set.

Assume you have coded and punched (transcribed onto cards) a program to process payroll records. The program is coded in PL/I and, like the insurance premium program discussed earlier, it must be compiled and link-edited (or linkage edited) before it can be executed. Therefore, your job will have three steps: compilation, link-editing, and execution.

First, you must code a JOB statement to mark the beginning of your job. On this statement, you must assign a name to your job so that both the system and the operator will be able to identify it. For example, you could code:

//PAYROLL JOB (D58706, GROUP1), WOODEN

Name of Accounting Programmer's

the job information name

After the JOB statement, you code an EXEC statement to mark the beginning of the first step. On this statement, you code the name of the PL/I compiler you are requesting to translate your source program into machine language. For example, you would code:

//COMPILE EXEC PGM=IEMAA, PARM='LOAD, NODECK'

Name of Name of the Information being the job step PL/I compiler passed to the compiler requested

Following the EXEC statement, you code a DD (data definition) statement for each data set the PL/I compiler requires. One of these DD statements must tell the compiler that you are placing your source program in the input stream. Another DD statement must be used to tell the compiler where to place the machine language translation of your program (the object module). The other DD statements should be used to define work areas, for printing messages, and for listings. (A listing is a printout of the source language statements of a program.) After you code all the DD statements needed by the PL/I compiler, you code a delimiter statement to separate your source program from the JCL statements of the next step. Your source program will be placed in the input stream immediately following a //SYSIN DD * statement and before the delimiter statement.

The next step begins with an EXEC statement. On this statement, you request execution of the linkage editor. The linkage editor, like the PL/I compiler, will require certain data sets. Each data set required by this step must have a DD statement coded to describe it. In this step, you must include a DD statement telling the linkage editor where the PL/I compiler placed the object module. You must also include a DD statement telling the linkage editor where it is to place the load module it produces. The load module is the executable form of your program. Once it is loaded into main storage, it can be executed by the central processing unit. Other DD statements should be included for work areas, for printing messages, and for listings.

The third step calls for the actual execution of your program. The EXEC statement for this step requests that your program (the load module produced by the previous step) be executed. You will need to code DD statements to tell your program where the payrol1 records are that you intend to process. Following the DD statements for this step, you can include the payroll records (if they are in card form). Otherwise you indicate to your program that the payroll records are on magnetic tape or direct access. The last DD statement for the step should indicate to the system that the data following it is to be used by your program. You will need DD statements to tell your program where the master file is and where you want the output of your program to go, and to define any work areas or other data required by your program. You can code a null statement to be placed at the end of your deck. The null statement will indicate to the system that this is the end of your job. Once your entire job (the JCL, the payroll records, and your source program) is either properly identified by JCL control cards or included in the input stream (see figure 3), it is ready to be submitted for processing.

Another way of defining your job is through the use of a cataloged procedure. IBM supplies a catalog procedure which defines the steps needed for compilation, link-editing, and executing your program, or you can write your own. The procedure described in the previous discussion might be cataloged for this purpose.

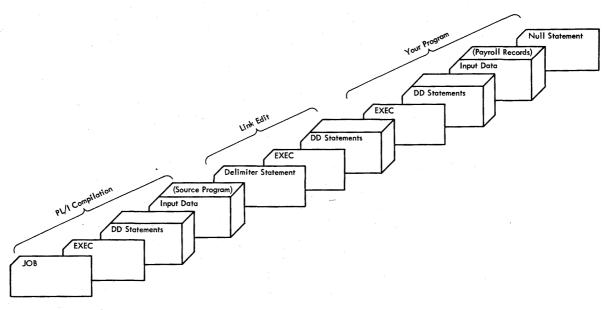


Figure 5. Your Job

Cataloged and In-Stream Procedures

often the same set of job control statements is used repeatedly with little or no change (for example, to specify compilation, link-editing, and execution of programs). To save programming time and to reduce the possibility of error, standard job step definitions can be prepared and placed (or cataloged) in a partitioned data set known as the procedure library. The procedure library (SYS1.PROCLIB) is a system data set maintained on direct access storage by the control program. A set of job control language statements placed in the procedure library is called a cataloged procedure. A cataloged procedure consists of EXEC and DD statements.

By simply using a JOB statement and an EXEC statement, you can retrieve a specific catalog procedure. You specify on the EXEC statement the name of the procedure you want. This directs the job scheduler to use the job step definition from the procedure library. The effect is the same as if the job control statements of the cataloged procedure appeared in the input stream in the place of the EXEC statement that calls the procedure. If necessary, you can modify the cataloged procedure by a process known as overriding.

Before putting a procedure into the procedure library, you may want to test it. This can be done by converting the procedure to an in-stream procedure. An in-stream procedure is a set of JCL statements placed in the input stream that can be used any number of times during a job by naming that procedure in an execute (EXEC) statement. Another advantage to in-stream procedures is that they can give you the facility of a cataloged procedure without being placed on the procedure library. After testing the procedure, you may keep it in card form and simply insert it in the input stream whenever you want to use it.

Processing Your Job

To have a job processed, you must submit the JCL statements and any related input data to the operating system through an input/output (I/O) device chosen by the operator. The input unit can be a card reader, a magnetic tape, a telecommunications line, or a direct access device. The sequence of JCL statements and input data for all the jobs being submitted through an input unit is called the input stream.

Assume you submit a PL/I payroll job to be processed by a system with MFT. The program is in the form of punched cards, called a deck. The operator places your deck in the card reader (input unit) together with decks for other jobs to be processed. In this case, the card decks for all these jobs constitute the input stream (see figure 4).

The operator starts the system reader; that is, he instructs the operating system (job management) to start reading the input stream. Job management stores the job control statements in the job queue data set (SYS1.SYSJOBQE) until they are used. Then it examines the first step and determines its needs. The first step of your job requests the PL/I compiler and defines several data sets. The operating system (data management) determines whether there is any space available on the devices you requested for the data sets the PL/I compiler will create during this step (for example, the object module) and whether the data sets required by the compiler are available (for example, your source program).

If all data set requirements are met, the PL/I compiler is brought into main storage and given control. After your program is compiled, the operating system reads and determines the requirements of the second step which requests the linkage editor. The operating system performs the same operations for the data sets required by the linkage editor and

then brings the linkage editor into main storage and gives it control. After the linkage editor produces the load module, the operating system reads and processes the next step. Its requirements are determined, and your program is brought into main storage and given control.

While this job is being executed, the system can also execute up to 15 other jobs from up to 3 input streams.

Capabilities of the Job Control Language

The job control language provides you with many capabilities to help in efficiently getting your job coded and processed. The language allows you to:

- Specify the device requirements of a program at the time it is executed rather than when it is assembled or compiled. You do this by writing a program in such a way that it is not directly tied to a particular I/O device. A device-independent program could, for example, accept an input data set from any magnetic tape or direct access device, or from any card reader; output could be recorded on any appropriate I/O device. At the time you submit the program for execution, you code in your JCL the type of device required.
- Copy existing data set names, control statements, and control blocks with a backward reference facility to reduce recoding. When coding a DD statement, you simply use this facility to refer the system to an earlier DD statement that contains certain information you want copied.
- Pass data sets used by more than one step from one step to another, to reduce mounting and retrieval time.
- Retrieve a data set by name using the system catalog, eliminating the need to know its exact location.
- Optimize use of channels, units, volumes, and direct access space. For example, when two or more data sets are to be used in a job step, processing time may be shortened by requesting that the system transmit data over separate channels (A channel is a hardware device that connects a CPU and main storage with input/output control units). It would be faster to have your input data set and your output data set on separate channels than to have them on the same channel. A JCL parameter allows you to request channel separation for data sets in each job step.
- Specify that data sets are to be shared by two or more job steps that are operating independently.
- Classify jobs according to their characteristics and importance so that the system may balance the mix of jobs for more efficient operation. The characteristics of the job will determine its class and the turnaround time required by a job will determine its priority. For example, an installation may assign jobs that use a large amount of main storage to one class, jobs that run for a long time to another, and teleprocessing jobs to another class. Within each class you may assign priorities to determine the order of execution. In the class of "jobs that run for a long time", you may wish to assign a higher priority to the weekly payroll program than to the monthly analysis program. Each job is executed one step at a time and steps of different jobs can be interleaved. For example, if, while the system is executing a job that runs for a long time, enough resources are available to process teleprocessing jobs, several teleprocessing jobs can also run.

Once you learn the basics of the job control language, you should become familiar with these and other capabilities of the language that have been designed to make the most efficient use of the operating system. Part II of this publication will introduce you to the various parameters that can be coded on the JCL statements. The facilities that have been briefly explained here are discussed in greater detail with examples of their use.

Section I: Programming Notes

The formats of the parameters described in this publication for the JOB, EXEC, and DD statements appear at the beginning of the chapter on the corresponding parameter. Notations used in the format descriptions are described below.

 Uppercase letters and words are coded on the control statement exactly as they appear in the format description, as are the following characters.

ampersand & asterisk * comma , equal sign = parentheses () period .

2. Lowercase letters, words, and symbols appearing in the format description represent variables for which specific information is substituted when the parameter is coded.

For example, PRTY=priority is the format description for the PRTY parameter. When you code the PRTY parameter on a JOB statement, you substitute a number for the word "priority."

3. Braces { } are a special notation and are never coded on a control statement. Braces are used to group related items; they indicate that you must code one of the items.

For example, {TRK } is part of the format description CYL block size

for the SPACE parameter. When you code the SPACE parameter, you must code either TRK, CYL, or a substitute for "block size," which would be a number.

4. Brackets [] are a special notation and are never coded on a control statement. Brackets indicate that the enclosed item or items are optional and you can code one or none of the items.

For example, [,DEFER] is part of the format description for the UNIT parameter. When you code the UNIT parameter, you can include ,DEFER in the UNIT parameter or omit it.

An example of more than one item enclosed in brackets is

[EXPDT=yyddd] , which is part of the format description for the RETPD=nnnn

LABEL parameter. When you code the LABEL parameter, you can include either EXPDT=yyddd or RETPD=nnnn in the LABEL parameter or omit both.

Sometimes, one of a group of items enclosed in brackets is a comma. You code the comma when none of the other items in the group is used and a following part of the parameter is still to be coded.

The comma indicates to the system that you have not selected to code any of the items enclosed in the brackets.

For example, [,progname] [,form number]) is part of the format

description for the SYSOUT parameter. When you code the SYSOUT parameter, you have the option of coding both ",progname" and ",form number", omitting both, or coding only one. The comma enclosed in brackets with ",progname" must be coded when ",progname" is not coded but ",form number" is coded; that is, you would code: ,,form number).

5. An ellipsis ... (three consecutive periods) is a special notation and is never coded on a control statement. An ellipsis is used to indicate that the preceding item can be coded more than once in succession.

For example, COND=((code, operator),...) is the format description for the COND parameter on the JOB statement. The ellipsis indicates that (code, operator) can be repeated.

Fields in Control Statements

Every control statement is logically divided into different fields. There are four fields -- name field, operation field, operand field, comments field -- but not all of the control statements can contain all of these fields. Figure 6 shows the fields for each statement.

Statement	Columns 1 and 2	Fields
Job Execute Data Definition PROC(Cataloged) PROC(in-stream) Procedure end Command Delimiter	// // // // // //	name operation(JOB) operand¹ comments¹ name¹ operation(EXEC) operand comments¹ name¹ operation(DD) operand comments¹ name¹ operation(PROC) operand comments¹ name operation (PROC) operand¹ comments² name¹ operation(PEND) comments¹ operation(command) operand comments¹ comments¹
Statement	Columns 1,2,3	Field
Comment	//* comments	
Optional Optional If operand(s) are not coded, comments cannot be coded. If operand(s) are coded, comments are optional.		

Figure 6. Control Statement Fields

The <u>name field</u> identifies the control statement so that other statements and system control blocks can refer to it. The name field is 1 to 8 alphameric and national (#, @, \$) characters; the first character must be alphabetic or national. The name field must begin in column 3.

The <u>operation field</u> specifies the type of control statement, or, in the case of the command statement, the command. The operation field must follow the name field and must be preceded and followed by at least one blank.

The <u>operand field</u> contains parameters separated by commas. The operand field must follow the operation field and must be preceded and followed by at least one blank. The operand field is described in more detail in the next chapter "Parameters in the Operand Field."

The <u>comments field</u> contains any information deemed helpful by the person who codes the control statement. The comments field must follow the operand field and must be preceded by at least one blank.

Control statement fields -- except the name field, which must begin in column 3 -- can be coded in free form. Free form means that the fields need not begin in a particular column. Separate each field with a blank; the blank serves as a delimiter between fields.

Except for the comment statement, which can be coded through column 80, fields cannot be coded past column 71. If the total length of the fields will exceed 71 columns, you must continue the fields onto one or more succeeding statements. How to continue fields is described in the chapter "Continuing Control Statements."

Some examples of how the different fields appear on control statements are:

Columns:			
1 2 3 <u>Name</u>	Operation	Operand	Comments
/ / JOB8	JOB	MSGLEVEL=(1,1)	THE FIRST STATEMENT IN JOB
// STP1	EXEC	PGM=PROG4,REGION=80K	EXECUTES PROGRAM NAMED PROG4
// WORK	DD	UNIT=2400	DEFINES A TEMPORARY DATA SET

Parameters in the Operand Field

The operand field is made up of two types of parameters: one type is characterized by its position in the operand field in relation to other parameters (a positional parameter); the other type is positionally independent with respect to others of its type, and is characterized by a keyword followed by an equal sign and variable information (a keyword parameter). Both positional parameters and the variable information associated with keyword parameters can assume the form of a list of several items (subparameters) of information.

All positional and keyword parameters and subparameters coded in the operand field must be separated from one another by commas.

<u>Positional parameters</u> must be coded first in the operand field in a specific order. The absence of a positional parameter is indicated by a comma coded in its place. However, if the absent parameter is the last one, or if all later positional parameters are also absent, you need not code replacing commas. If all positional parameters are absent from the operand field, you need not code any replacing commas.

<u>Keyword parameters</u> can be used anywhere in the operand field with respect to one another. Because of this positional independence, you need not indicate the absence of a keyword parameter.

A positional parameter or the variable information in a keyword parameter sometimes assumes the form of a <u>list of subparameters</u>. Such a list may be composed of both positional and keyword subparameters that follow the same rules and restrictions as positional and keyword parameters. You must enclose a subparameter list in parentheses, unless the list reduces to a single subparameter.

The EXEC statements and DD statements in cataloged procedures can contain one other type of parameter -- a <u>symbolic parameter</u>. A symbolic parameter is characterized by a name preceded by an ampersand (6); a symbolic parameter stands as a symbol for a parameter, a subparameter, or a value. Symbolic parameters allow you to make any information in the operand field of a procedure EXEC statement or DD statement variable. A value to be assumed by a symbolic parameter may be coded on the EXEC statement that calls the procedure. This value is in effect only while the procedure is being executed. For a detailed discussion on how to assign values to symbolic parameters, refer to the chapter "Assigning Values to Symbolic Parameters" in Appendix A; for a detailed discussion on how to use symbolic parameters in a set of control statements that you plan to catalog as a procedure, refer to the chapter "Using Symbolic Parameters in a Procedure" in Appendix A.

Continuing Control Statements

When the total length of the fields on a control statement will exceed 71 columns, you must continue the fields onto one or more succeeding statements.

The command, comment, delimiter, and null statements cannot be continued.

You can continue the operand field or the comments field. To continue either of these fields, you must follow the continuation conventions.

To continue the operand field:

1. Interrupt the field after a complete parameter or subparameter, including the comma that follows it, at or before column 71.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80
1234567890	1234567890	1234567890	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1234567890	1234567890
1/DD4 DD	DSNAME = PRO	B4.3.88 . DISP	= (NEM. KEEP	DELETE)			1

Comments can be included by following the interrupted field with at least one blank.

1	1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80
j	1 2 3 4 5 6 7 8 9 0	1234567890	1 2 3 4 5 6 7 8 9 0	1234567890	1234567890	1234567890	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0
1	1,1,2,0,4, 2,0,	DSNAME = PRO	B.43.88. D.15.P	-(NENLKEP	DELETE)	DATA ISET F	OR TEST81	

3. Optionally, code any nonblank character in column 72. (The nonblank character in column 72 is required only when you are continuing a comments field.) If you do not code a character in column 72 when continuing the operand field, the system treats the next statement as a continuation statement as long as you follow the conventions outlined in items 4 and 5.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80
1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1 2 3 4 5 6 7 8 9 0	123456789
11201 22	2014 4 5 20-	04-06 D0					v .
1,10041,00.	DSNAME = PRO	R43.8.8 . D.1.S.P	= (NEW KEEP	DELETE)	DATA SET F	O.R. TEIST.8.1	. X i

4. Code the identifying characters // in columns 1 and 2 of the following statement.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80
1234567890	1234567890	1234567890	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0
//					Linter		

5. Continue the interrupted operand beginning in any column from 4 through 16. If you leave the statement blank after column 2 or if you begin coding after column 16, the system assumes that no other operands are present and treats any characters you code as a comment field.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80		
1234567890	1234567890	1234567890	1234567890	1234567890	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1234567890		
1.1. UMIT=231.1. VOLUME=SER=BITST84, SPAGE=(800, (150, 25))									

To continue the comments field:

Interrupt the comment at a convenient place before column 72.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80
1234567890	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1234567890	1234567890	1 2 3 4 5 6 7 8 9 0	1234567890	1234567890
1. S.T.E.P.I.	EXEC PGM = A	8.1.9. REG.1.0.N	=8.6K. RD=R.	D.P.R.T.Y = (1.3.)	12) RESUL	T.S O.F. T.E.S.T	i

2. Code a nonblank character in column 72.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80			
1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0			
1.1 STEP.	CVER LOWER	8.1.4. KEG1.0.N	FIXELD, K.D. K.	DIPK17.91=161/151.	12) NESUL	13, OF 1531	<u> </u>			

Code the identifying characters // in columns 1 and 2 of the following statement.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80
1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1234567890	1 2 3 4 5 6 7 8 9 0
1.6		1	1 1			 i	

4. Continue the comments field beginning in any column after column 3.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80		
1234567890	1234567890	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0		
1.1. SHOULD BE SENT TO MR. ECKERT									

Any control statements in the input stream, other than a comment statement, that the system considers to contain only comments have //*

in columns 1 through 3 on an output listing. Any control statements in a cataloged procedure, other than a comment statement, that the system considers to contain only comments have XX* in columns 1 through 3 on an output listing. For an in-stream procedure ++* appears in columns 1-3. In both cases for a comment statement, *** appears in columns 1 through 3 on an output listing.

Backward References

A facility of the job control language allows you to refer the system to an earlier DD statement in the job for certain information. A backward reference is of the following form:

- parameter=*.ddname -- use this form when the earlier DD statement is contained in the same job step.
- parameter=*.stepname.ddname -- use this form when the earlier DD statement is contained in an earlier job step.
- parameter=*.stepname.procstepname.ddname -- use this form when the earlier DD statement is contained in a cataloged procedure called by an earlier job step. ("Stepname" is the name of the step that calls the procedure.)

You can use the backward reference facility only with certain parameters. These parameters and the information the system obtains when the backward reference facility is used are:

- PGM -- the data set that contains the program to be executed in this job step.
- DCB -- all DCB subparameters coded on the earlier DD statement. (If you code any DCB keyword subparameters following the backward reference, these subparameters override any of the corresponding subparameters coded on the earlier DD statement. If a DD statement defines an existing data set and contains a backward reference in the DCB parameter, the system copies only those subparameters from the earlier DD statement that were not previously specified for the existing data set.)
- DSNAME -- the name of the data set being defined on this DD statement.
- VOLUME-REF -- the volume serial number(s) on which the data set resides or will reside; unit information is also obtained by the system.

Concatenating Data Sets

Up to 255 sequential or up to 16 partitioned input data sets, each of which may reside on a different volume, can be logically connected for the duration of a job step. To concatenate data sets, simply omit the ddnames from all the DD statements except the first in the sequence. When this ddname is encountered in a data control block in the processing program, each data set is automatically processed, in the same sequence as the DD statements defining them.

If concatenated data sets have unlike characteristics, e.g., the device types, block lengths, or record formats differ, the DCBOFLGS field of the data control block must be modified while the program is executing. For details, refer to the topic "Concatenating Sequential and Partitioned Data Sets" in the <u>Data Management Services</u> publication.

If you make a backward reference to a concatenation (using an asterisk), the system obtains information only from the first data set defined in the sequence.

If you make a forward reference to a concatenation (using the DDNAME parameter), the system only obtains information from the first data set defined in the sequence.

You should not concatenate other data sets to a data set you have defined using the DUMMY parameter. When the processing program asks to read a dummy data set, an end-of-data-set exit is taken immediately and any concatenated data set is ignored.

The following example illustrates a group of DD statements defining concatenated data sets, including a data set in the input stream.

Character Sets

Job control statements are coded using a combination of the characters from three different character sets. The contents of each of the character sets are described in figure 7.

Character Set	Content	ts
Alphameric	Alphabetic Numeric	A through Z 0 through 9
National	"At" sign Dollar sign Pound sign	9 \$ #
Special	Comma Period Slash Apostrophe Left parenthesis Right parenthesis Asterisk Ampersand Plus sign Hyphen Equal sign Blank	, - - () * & + - =

Figure 7. Character Sets

When you code any special characters, certain rules must be followed. These rules and the use of special characters are described next.

Using Special Characters

Special characters are used in the job control language to:

- Delimit parameters (the comma).
- 2. Delimit fields (the blank).
- 3. Perform syntactical functions. (For example, the appearance of && as the first two characters following DSNAME= tells the system that a temporary data set name follows. The appearance of / in the UNIT parameter, UNIT=293/5, tells the system that a specific 2321 bin is desired.)

Sometimes you can code a special character that does not satisfy one of the three uses of special characters. In most of these cases, you must indicate that special characters are being used by enclosing the item that contains the special characters in apostrophes (5-8 punch), e.g., ACCT='123+456'. If one of the special characters is an apostrophe, you must code two consecutive apostrophes (two 5-8 punches) in its place, e.g., 'O'NEILL'.

The following list contains those parameters that can have special characters as part of their variable information, and indicates when the apostrophes are not required.

- The accounting information on the JOB statement. The account number and additional accounting information can contain hyphens without being enclosed in apostrophes.
- 2. The programmer's name on the JOB statement. The programmer's name can contain periods without being enclosed in apostrophes.
- 3. The checkid field in the RESTART parameter on the JOB statement.
- 4. The ACCT parameter on the EXEC statement. The ACCT parameter can contain hyphens without being enclosed in apostrophes.
- 5. The PARM parameter on the EXEC statement.
- 6. The DSNAME parameter on the DD statement. The DSNAME parameter can contain hyphens without being enclosed in apostrophes. If the DSNAME parameter contains a qualified name, it can contain periods without being enclosed in apostrophes. If the DD statement identifies a generation of a generation data group, the generation number in the DSNAME parameter can contain a plus or minus (hyphen) sign without being enclosed in apostrophes. If the DD statement defines a temporary data set, the DSNAME parameter can contain, as the first two characters, ampersands without being enclosed in apostrophes. If the DD statement defines a member of a partitioned data set, a generation of a generation data group, or an area of an indexed sequential data set, the DSNAME parameter contains parentheses that enclose the member name, generation number, or area name; these parentheses are not enclosed in apostrophes.
- 7. The volume serial number in the VOLUME parameter on the DD statement. The volume serial number can contain hyphens without being enclosed in apostrophes.
- 8. The DLM parameter on the DD statement.

Coding Form

For your convenience in coding control statements, you can use Form N74167, a punch card containing formatted lines, each representing a different type of statement. (See figure 8.) Some of the lines can be used for concatenations, overrides, and continuation statements.

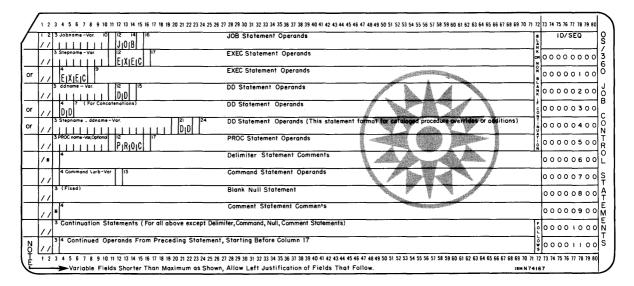


Figure 8. Coding Form for Coding Control Statements

Section II: The JOB Statement

The JOB statement marks the beginning of a job and, when jobs are stacked in the input stream, marks the end of the control statements for the preceding job. The JOB statement must contain a valid jobname in its name field. All parameters in its operand field are optional, unless your installation has established that the account number and the programmer's name parameters must be coded. If no parameters are coded in the operand field of the JOB statement, no comments can be coded on the statement.

JOB Statement Format

//jobname JOB operands comments

The JOB statement consists of the characters //, in columns 1 and 2, and four fields -- the name, operation (JOB), operand, and comments fields.

Rules for Coding

Follow the order listed below when coding the JOB statement:

1. Code the characters // in columns 1 and 2.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80
1234567890	1234567890	1234567890	1234567890	1 2 3 4 5 6 7 8 9 0	1234567890	1234567890	1 2 3 4 5 6 7 8 9 0
44		<u> </u>					

Select a name for the job; code that name, starting in column 3.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80
1234567890	1234567890	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1234567890
1.1.CALIC.							1 1 1

- 3. Follow the jobname with at least one blank.
- 4. Code JOB.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80
1 2 3 4 5 6 7 8 9 0	1234567890	1234567890	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0
1.1.CALIC, JOB							

- 5. Follow JOB with at least one blank.
- 6. Code any desired positional parameters. Separate each parameter with a comma.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80
1234567890	1234567890	1234567890	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1234567890	1234567890	1 2 3 4 5 6 7 8 9 0
1.1.CALIC JOB	C. BROW	W. '		 		المناب المسا	

 Code any desired keyword parameters. Separate each parameter with a comma.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80
1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0
1.1CALIC, JOB (C. BROWN', MSGLEVEL = (2.11), REGION=11.00K							
							

- 8. Code at least one blank.
- 9. Code any desired comments.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80
1234567890	1234567890	1234567890	1 2 3 4 5 6 7 8 9 0	1234567890	1234567890	1234567890	1 2 3 4 5 6 7 8 9 0
1.1.CALIC JOB , 'C. BROMM', MSIGLEVEILE (221), REGION 11.00K DEPT. 82 BUN							

Positional and Keyword Parameters

There are two types of parameters that can be coded on the JOB statement:

<u>Positional parameters</u>, which, when used, must precede any keyword parameters and must be coded in the following order:

```
accounting information programmer's name
```

These positional parameters are described in the following pages in the order listed above.

<u>Keyword parameters</u>, which may be coded in any order after the positional parameters. Any of the following keyword parameters can be coded on the JOB statement:

```
CLASS
COND
MSGCLASS
MSGLEVEL
NOTIFY (MVT with TSO)
PRTY
RD
REGION (MVT only)
RESTART
ROLL (MVT only)
TIME
TYPRUN
```

These keyword parameters are described, after the positional parameters, in the order listed above.

Sample JOB Statements

1. //ALPHA JOB 843, LINEE, CLASS=F, MSGLEVEL=(1,1)

2. //LOS JOB BROWNLY, REGION=90K, TIME=(4,30), MSGLEVEL=(2,0)

3. //MART JOB 1863, RESTART=STEP4

4. //TRY8 JOB

JOB

Assigning a Johname

//jobname JOB

You must assign a name to every job submitted for execution. The jobname must begin in column 3 of the JOB statement and must consist of 1 through 8 alphameric and national (#, 2, \$) characters. The first character must be an alphabetic or national character.

No two jobs in a multiprogramming environment should have the same jobname.

The following names and characters should not be used as jobnames, because they are keywords of the DISPLAY command:

CONSOLES	A	U
DSNAME	N	
JOBNAMES	Q	
SPACE	\mathbf{R}	
STATUS	${f T}$	

If you must assign one of these keywords as a jobname, notify the operator, so he will be sure to enclose the jobname in parentheses when he uses it with the DISPIAY command. For example, if you have assigned the jobname SPACE to a job and the system operator wishes to display the status of the job, he must issue a command stating DISPIAY (SPACE). If the parentheses were omitted, the operator would get the amount of available space on a particular direct access volume resulting from a DISPLAY SPACE command.

Examples of Valid Jobnames

//RERUN4	JOB
//#123A	JOB
//JOBD58	JOB

Accounting Information Parameter

([account number] [,additional accounting information,...])

account number

the account number to which this job is to be charged.

additional accounting information

any other accounting information required by an installation's accounting routines. When additional accounting information consists of more than one item, each must be separated by a comma.

Rules for Coding

- 1. When accounting information is supplied, it must be coded before any other parameter on the JOB statement.
- 2. The account number and each item of additional accounting information are considered subparameters and each must be separated by a comma.
- 3. When accounting information consists of more than one subparameter, you must enclose the information in either parentheses or apostrophes (5-8 punch), e.g., '5438, GROUP6' or (5438, GROUP6). If apostrophes are used, all accounting information enclosed in the apostrophes is considered as one field.
- 4. If the accounting information must be continued on another statement, enclose the accounting information in parentheses. You may not continue on another statement any accounting information enclosed in apostrophes.
- 5. The account number and other accounting information cannot exceed 142 characters, including the commas that separate the subparameters.
- 6. If any of the subparameters contain special characters (except hyphens), either: (1) enclose the accounting information in apostrophes, or (2) enclose the subparameter in apostrophes and the accounting information in parentheses, e.g., '5438,10/08/66' or (5438,'10/08/66'). (The enclosing apostrophes are not considered part of the information.) If one of the special characters is an apostrophe, code two consecutive apostrophes in its place, e.g., (5438,'0''NEILL'). If one of the special characters is an ampersand and you are not defining a symbolic parameter, code two consecutive ampersands in its place, e.g., '34668241'.
- 7. If you do not supply accounting information but do code the programmer's name, you must code a comma preceding the programmer's name to indicate that the accounting information parameter, which is a positional parameter, has been omitted. (Note: This may vary from one installation to another. Check whether you need to code a comma at your installation.)

Supplying Information Parameters

Accounting information is optional unless the installation establishes it as a requirement in a PARM field parameter of the cataloged procedure for the input reader.

Routines that process accounting information must be supplied by the installation. For information on how to add accounting facilities, refer to "Handling Accounting Information" in the Data Management for System Programmers publication.

Examples of the Accounting Information Parameter

- 1. //JOB43 JOB D548-868
 - Account number only; no parentheses are required.
- 2. //JOB44 JOB (D548-868, 12/8/69, WILSON)
 - Account number plus additional accounting information; parentheses are required.
- 3. //JOB45 JOB (,F1659,GROUP12),GREGORY
 - Only additional accounting information; parentheses are required.

Programmer's Name Parameter

programmer's name

programmer's name the name or identification of the person responsible for the job.

JOB

Rules for Coding

- 1. If the programmer's name parameter is coded, it must follow the accounting information parameter, or the comma that indicates its absence, and must precede all keyword parameters. (Note: This may vary from one installation to another. Check whether you need to code a comma at your installation.)
- The name cannot exceed 20 characters, including all special characters.
- 3. If the name contains special characters, other than periods, enclose the name in apostrophes. If the special characters include apostrophes, each must be shown as two consecutive apostrophes.
- 4. If you are not required to specify a name, you need not code a comma to indicate its absence.

When to Code the Programmer's Name Parameter

The programmers' name parameter is optional unless the installation establishes it as a requirement in a PARM field parameter of the cataloged procedure for the input reader.

Examples of the Programmer's Name Parameter

1. //APP JOB C.L.BROWN

Programmer's name, without accounting information supplied.

2. //DELTA JOB 'T.O''NEILL'

Programmer's name containing special characters, without accounting information supplied. (The leading comma is optional.)

3. //#308 JOB (846349,GROUP12),GREGORY

Account number plus additional accounting information and programmer's name.

The CLASS Parameter

CLASS=jobclass

jobclass

assigns a job class to your job. Code any alphabetic character from A through O, depending on the characteristics of your job and the installation's rules for assigning a job class.

Rules for Coding

1. The jobclass is an alphabetic character from A through O.

Assigning a Job Class to Your Job

The CLASS keyword parameter provides a way of establishing a good mixture of jobs requiring different system resources. A good mixture can be established since the job class determines where a job will be placed on the input work queue and jobs with common characteristics are assigned to the same job class. Jobs within a job class are assigned a priority, either in the PRTY parameter or by default. This allows jobs within a class to be selected for processing based on their priorities.

If you do not specify the CLASS parameter, the default job class of A is assigned to the job.

THE CLASS PARAMETER AND TIME-SLICING

If your installation provides time-slicing facilities with MFT, the CLASS parameter can be used to make a job part of a group of jobs to be time-sliced. At system generation, a group of contiguous partitions are selected to be used for time-slicing, and each partition is assigned at least one job class. To make your job part of a group of jobs to be time-sliced, specify a class that was assigned only to the partitions selected for time-slicing. (With MVT, you use the PRTY parameter and the DPRTY parameter to make, respectively, a job or job step part of a group of jobs and job steps to be time-sliced.)

Examples of the CLASS Parameter

1. //SETUP JOB CLASS=C

Assign a job to job class C.

2. //JAN JOB CLASS=M, PRTY=10

Assigning a job to job class M with a priority of 10.

The COND Parameter

COND=((code,operator),...)

code

a decimal number from 0 through 4095. This number is compared with the return code issued by each job step.

operator

the type of comparison to be made with the return code. Relational operators and their meanings are:

GT...greater than

GE...greater than or equal to

EQ...equal to

LT...less than

LE...less than or equal to

NE...not equal to

Rules for Coding

- 1. Code from one through eight different return code tests.
- When making only one return code test, you need not code the outer parentheses.

Using the COND Parameter

The COND keyword parameter can be used to eliminate unnecessary use of computing time by basing the continuation of a job on the completion of one or more of its job steps.

The operating system determines whether a job is to be discontinued after a given job step by comparing the return code produced by that job step to the conditions specified with the COND parameters. A return code is a number determined by the operating system or by the processing program which indicates the relative "success" of the job step. The return codes of the operating system and IBM-supplied processing programs are fixed numbers with specific meanings. They are listed in the publication IBM System/360 Operating System: Messages and Codes and in the publications associated with each processing program.

Only those user processing programs written in the assembler language, ANS COBOL, FORTRAN, or PL/I can set return codes for testing. The user return codes are usually standardized in each installation. For example, each step in your installation's payroll program may have its own set of return codes. One return code for a given job step may indicate that all payroll records were successfully processed while another may indicate that there were faulty input records. You can set up the COND parameter so that the job is discontinued if the return code that indicates faulty records is produced by that job step.

Not all return codes indicate either success or failure. For example, in the case of a compiler one return code can indicate no errors during compilation, a second code can indicate that the minor errors encountered are not likely to prevent link editing and execution of the compiled program, a third code can indicate that the major errors encountered will probably cause further processing of the compiled program to fail, and a fourth code can indicate that the compilation process has terminated abnormally. The COND parameter allows you to discontinue the job if any of these return codes are produced. You may

choose to continue processing only if no errors are found or, for debugging purposes, you may choose to continue processing even if major errors are found.

<u>Note</u>: If any job step is abnormally terminated (ABEND), all subsequent steps are bypassed unless the COND parameter of the EXEC statement is used to prevent it. (See the section on "The EXEC Statement.") If you want to restart the same step that terminated abnormally you can use the restart facilities of the operating system.

If you coded COND=((50,GE),(60,LT)), it would read "if 50 is greater than or equal to a return code, or 60 is less than a return code, I want the remaining job steps bypassed." In other words, the job continues as long as return codes range from 51 through 60. If you want to make only one return code test, you need not code the outer parentheses. For example, COND=(8,NE). A maximum of eight conditions can be established.

For example, if you code: COND=((5,GT),(8,EQ),(17,EQ),(19,EQ),(21,EQ),(23,LE)) your job will continue only if the return codes are: 5,6,7,9,10,11,12,13,14,15,16,18,20, or 22.

The tests you specify with the COND parameter are made to the return code, if any, produced by each step in your job. You can best take advantage of this parameter when the return codes of each job step have compatible meanings. For example, a return code of 4 from the AIGOL compiler indicates that the source program was compiled and some minor errors were found; the same return code of 4 from the linkage editor indicates that a load module was produced, but an error which may cause failure at execution time has been found. If you want to take a chance and continue processing even if small errors are found, you should code COND=(4,IT), that is, the job will terminate if the return code of any step is greater than 4. If you only want to continue processing if no errors are found, you should code COND=(4,IE), that is, the job will terminate if the return code of any step is greater than or equal to 4. (All codes greater than 4 indicate major errors for both the ALGOL compiler and the linkage editor.)

If the same return code has different meanings in different job steps, or if you want to take different actions according to which job step produced the return code, you should use the COND parameter of the EXEC statement to set up conditions for individual job steps.

If you omit the COND parameter from the JOB statement, no return code tests are performed throughout the job. If you want return codes tested for a given job step, use the COND parameter of the EXEC statement for that job step. If the COND parameter is not used in either the JOB or the EXEC statements, no return code tests are performed and the system will try to execute each step in the job.

If you code the COND parameter on the JOB statement and on one or more of the job's EXEC statements, the return code tests requested on the JOB statement have precedence over those requested on the EXEC statements. Therefore, any return code test requested on the JOB statement that is satisfied causes termination of the job, even if the return code test is not satisfied for a particular step.

Note: The COND parameter of the EXEC statement is slightly different from the COND parameter of the JOB statement. See the section on "The EXEC statement". Examples of using the COND parameter in both the JOB and EXEC statements are also shown in that section.

JOB

Examples of the COND Parameter

1. //TYPE JOB COND=(7,LT)

If 7 is less than the return code, the job is terminated. (Any return code less than or equal to 7 allows the job to continue.)

2. //TEST JOB COND=((20,GE),(30,LT))

IF 20 is greater than or equal to the return code, or 30 is less than the return code, the job is terminated. (Any return code of 21 through 30 allows the job to continue.)

The MSGCLASS Parameter

MSGCLASS=output class

output class

the output class to which system messages for your job are to be routed by the system. Code an alphabetic (A-Z) or numeric (0-9) character depending on your installation's rules for assigning an output class for system messages.

Rules for Coding

1. The output class is an alphabetic (A-Z) or numeric (0-9) character.

Assigning an Output Class to System Messages

If the MSGCLASS parameter is not coded, system messages associated with your job are routed to the default output class specified in the PARM field of the input reader procedure. The default for the MSGCLASS parameter is A unless changed by your installation. (Default values and restrictions supplied by IBM in the input reader procedure are listed in Appendix E. For more information on the input reader procedure, consult Data Management for System Programmers.) Your installation may require that you specify a different output class other than the default value in order to separate different types of output or to distribute the workload of the output writers. One or more output classes is associated with each output writer; each output writer is associated with a specific output device.

You can route a job's system messages and output data sets to the same output class. You do this by coding the same output class in both the MSGCLASS parameter on the JOB statement and the SYSOUT parameter on the DD statements for the data sets.

Examples of the MSGCLASS Parameter

1. //IN JOB MSGCLASS=F

Specifying an output class.

2. //BOTLE JOB

Specifying no output class. In this case, the output class will default to the MSGCLASS value specified in the PARM field of the input reader procedure. The default is A unless changed by your installation.

3. //A1430 JOB MSGCLASS=L //STEP1 EXEC PGM=PRINT //OUTPUT DD SYSOUT=L

Specifying that a job's system messages (MSGCIASS parameter) and output data set (SYSOUT parameter) are to be routed to the same output class.

The MSGLEVEL Parameter

MSGLEVEL=(statements, messages)

statements

specifies which job control statements are to be written as output from your job. Code:

- 0 when only the JOB statement is to be written.
- 1 when all input job control statements, cataloged procedure statements, and the internal representation of procedure statement parameters after symbolic parameter substitution are to be written.
- 2 when only input job control statements are to be written.

messages

specifies what allocation/termination messages (consisting of allocation, disposition, and allocation recovery messages) are to be written as output from your job. Code:

- 0 when no allocation/termination messages are to be written, unless the job abnormally terminates. If this occurs, these messages are to be written as output.
- 1 when all allocation/termination messages are to be written.

Rules for Coding

- 1. If the first subparameter of the MSGLEVEL parameter is omitted, you must code a comma to indicate its absence, e.g., MSGLEVEL=(,1).
- If the second subparameter of the MSGLEVEL parameter is omitted, you need not code the parentheses, e.g., MSGLEVEL=2.

Requesting Output of Job Control Statements and Certain Messages

The MSGLEVEL keyword parameter is used to tell the job scheduler what output from your job is to be written as part of the output listing. You can request the following output:

- The JOB statement.
- All input job control statements.
- All cataloged procedure statements for procedures called by any of the job's steps and the internal representation of procedure statement parameters after symbolic parameter substitution.
- Allocation, disposition, and allocation recovery messages (allocation/termination messages).

You need to code the MSGLEVEL parameter only when the established default will not provide you with the desired output. The default is established as a PARM parameter field in the cataloged procedure for the input reader. The established default is assumed when MSGLEVEL is not coded or when one of the subparameters is not coded. For system tasks, the system assumes a message level of (1,0).

JOB

Examples of the MSGLEVEL Parameter

1. //GD40 JOB MSGLEVEL=(2,1)

Requesting that only input statements and all allocation/termination messages be written.

2. //STEP JOB MSGLEVEL=(0,1)

Requesting that only the job statement and all allocation/termination messages be written.

3. //SYM JOB MSGLEVEL=(1,0)

Requesting that all input control statements, procedure statements, the internal representation of procedure statements after symbloic parameter substitution, and no allocation/termination messages be written.

The NOTIFY Parameter (For MVT with TSO)

NOTIFY=user identification

user identification

specifies the identification that is to be used to notify you when your background job is complete. Code a 1 to 7 character alphameric identification. The first character must be an alphabetic character.

JOB

Rules for Coding

- 1. If the NOTIFY parameter is coded for MFT, or MVT without the Time Sharing Option (TSO), the parameter is not used, but is checked for syntax.
- 2. The user identification must be the same as the one you specify when you start the terminal session (LOGON).

What the NOTIFY Parameter Does

The NOTIFY keyword parameter indicates to the system that you are requesting that a message be sent to your time sharing terminal when your background job completes. Under TSO, a background job is one that is entered through the SUBMIT command or through the input stream (SYSIN).

WHAT IS TIME SHARING

Time sharing is a method of using a computing system that allows a number of users to execute programs concurrently and to interact with them during execution. The Time Sharing Option (TSO) is an option of the operating system providing conversational time sharing from remote terminals. That is the user "converses" with the system through the use of the terminal.

Reference:

1. For a detailed discussion of the Time Sharing Option, refer to <u>IBM</u>
<u>System/360 Operating System: Time Sharing Option Guide.</u>

Example of the NOTIFY Parameter

1. //SIGN JOB NOTIFY=POK1

When the job "SIGN" is complete, a message will be sent to the user "POK1" informing him that his job has been completed.

The PRTY Parameter

PRTY=priority

priority
assigns a priority of 0 through 13 to your job. (The highest priority is 13.)

Rules for Coding

- Avoid using priority 13 since this priority is used by the system to expedite processing of jobs in which certain errors were diagnosed.
- In MVT, if you want a job step to have a different dispatching priority than the job's, code the DPRTY parameter on the EXEC statement associated with that job step.

What the PRTY Parameter Does

The PRTY keyword parameter determines the job's initiation priority within its job class. (The job class is assigned in the CLASS parameter on the JOB statement.) When the job is initiated, the system converts the job's priority into a dispatching priority so that the job's tasks can compete with other tasks for use of main storage and CPU resources.

If you do not specify the PRTY parameter, a default priority is assumed. The default is specified as a PARM parameter field in the cataloged procedure for the input reader.

The PRTY Parameter and Time-Slicing

If your installation provides time-slicing facilities in MVT, the PRTY parameter can be used to make a job part of a group of jobs and job steps to be time-sliced. The priorities of the time-sliced groups are selected at system generation. To make your job part of a group of jobs to be time-sliced, specify a priority number selected for time-slicing. (To make one of the job's steps part of a group of jobs and job steps to be time-sliced, code the DPRTY parameter on the associated EXEC statement.)

Examples of the PRTY Parameter

1. //#1930 JOB PRTY=8,CLASS=C

The job will have an initiation priority of 8 in the job class C.

2. //RING JOB PRTY=4

The job will have an initiation priority of 4 in the job class A. (Since the CLASS parameter is not specified, the job is assigned to the default job class A.)

The RD Parameter

RD= (R) RNC NC NR

R

specifies that automatic step restart is permitted.

RNC

specifies that automatic step restart is permitted and automatic checkpoint restart is not permitted and no checkpoints can be established.

NC

specifies that neither automatic step restart nor automatic checkpoint restart is permitted and no checkpoints can be established.

NR

specifies that neither automatic step restart nor automatic checkpoint restart is permitted, but the CHKPT macro instruction can establish a checkpoint.

Rules for Coding

- Be sure to code MSGLEVEL=(1,0), MSGLEVEL=(1,1), or MSGLEVEL=1 when RD=R or RD=RNC is specified.
- If you are permitting automatic step restart, assign each step a unique step name.
- 3. Code the RD parameter on EXEC statements, instead of the JOB statement, when you want to make different restart requests for each job step. (If the RD parameter is coded on the JOB statement, RD parameters coded on the job's EXEC statements are ignored.)

Using the Restart Facilities

The RD (restart definition) keyword parameter is coded when you want to make use of the step restart facilities, to suppress the action of the CHKPT macro instruction, or to suppress automatic restarts. The step restart facilities permit execution of a job to be automatically restarted at a job step after the job abnormally terminates or after a system failure occurs. Through the RD parameter, you can specify that execution of a job is to be automatically restarted at the beginning of a job step that abnormally terminates (step restart).

Execution of a job can also be automatically restarted within a job step that abnormally terminates (checkpoint restart). In order for checkpoint restart to occur, the CHKPT macro instruction must have been executed in the processing program before abnormal termination. When you use the RD parameter to request suppression of CHKPT macro instruction action, automatic checkpoint restart cannot occur.

If the RD parameter is not coded, step restart cannot occur. If the RD parameter is not coded and the processing programs contain CHKPT macro instructions, checkpoint restart can occur.

The following three conditions must be met before automatic step or checkpoint restart can occur: (1) the completion code returned during abnormal termination indicates that the step is eligible for restart, (2) the operator authorizes restart, and (3) MSGLEVEL=(1,0), MSGLEVEL=(1,1), or MSGLEVEL=1 must be coded on the JOB statement. If these conditions are satisfied, special disposition processing is performed before restart. If automatic step restart is to occur, all data sets in the restart step with a status of OLD or MOD, and all data sets being passed to steps following the restart step, are kept. All data sets in the restart step with a status of NEW are deleted. If automatic checkpoint restart is to occur, all data sets currently in use by the job are kept.

DEFINING RESTART

You define the type of restart that can occur by coding one of the subparameters of the RD parameter: R, RNC, NC, or NR. Each of these subparameters is described in detail in the following paragraphs.

<u>RD=R</u>: R indicates that automatic step restart is permitted. If the job's processing programs do not include any CHKPT macro instructions, coding RD=R permits execution to be resumed at the beginning of any step that abnormally terminates. If any program does include a CHKPT macro instruction, coding RD=R permits step restart to occur only if the step abnormally terminates before execution of the CHKPT macro instruction; thereafter, only checkpoint restart can occur. If you cancel the effects of the CHKPT macro instruction before a checkpoint restart is performed, the request for automatic step restart is again in effect.

RD=RNC: RNC indicates that automatic step restart is permitted and automatic checkpoint restart is not permitted. RD=RNC should be specified when you want to suppress the action of all CHKPT macro instructions included in the job's processing programs and to permit automatic step restart.

<u>RD=NC</u>: NC indicates that neither automatic step restart nor automatic checkpoint restart is permitted. RD=NC should be specified when you want to suppress the action of all CHKPT macro instructions included in the job's processing programs and not to permit automatic step restart. RD=NC has no effect on processing if CHKPT macro instructions are not included in the programs.

<u>RD=NR</u>: NR indicates that a CHKPT macro instruction can establish a checkpoint, but neither automatic step restart nor automatic checkpoint restart is permitted. Coding RD=NR allows you to resubmit the job at a later time and specify in the RESTART parameter the checkpoint at which execution is to be resumed. (The RESTART parameter is coded on the JOB statement of the resubmitted job.) RD=NR has no effect on processing if CHKPT macro instructions are not included in the job's processing programs.

References

- For detailed information on the checkpoint/restart facilities, refer to the publication <u>Advanced Checkpoint/Restart Planning Guide</u>, Form C28-6708, the topic "Checkpoint and Restart" in the publication <u>Supervisor Services</u>, and "Using the Restart Facilities" in Appendix B of this publication.
- 2. For information on how to code the CHKPT macro instruction, refer to the publication <u>Supervisor Service and Macro Instructions</u>.

Examples of the RD Parameter

1. //MAY JOB RD=R, MSGLEVEL=(1,0)

Permits execution to be automatically restarted with the step that abnormally terminates.

2. //TRY56 JOB RD=RNC, MSGLEVEL=1

Permits execution to be automatically restarted beginning with the step that abnormally terminates and suppresses the action of CHKPT macro instructions.

3. //PASS JOB RD=NR, MSGLEVEL=(1,1)

Neither automatic step nor checkpoint restart can occur, but CHKPT macro instructions can establish checkpoints.

JOB

The REGION Parameter - Without Main Storage Hierarchy Support (For MVT)

REGION=valueK

valueK

"value" specifies the number of contiguous 1024-byte areas of main storage to be allocated to each job step. The number can range from one to five digits but may not exceed 16383.

Rules for Coding

- 1. Code an even number followed by a "K". (If you code an odd number, the system treats it as the next highest even number. When the value 16383K is coded, the system treats it as 16384K. However, the value 16384K must not be coded on the JOB statement.)
- 2. Code the REGION parameter on EXEC statements, instead of the JOB statement, when you want to specify a different region size for each job step. (If the REGION parameter is coded on the JOB statement, REGION parameters coded on the job's EXEC statements are ignored.)
- If the REGION parameter is coded for MFT, the parameter is not used, but is checked for syntax.

Requesting Main Storage

The REGION keyword parameter is used to specify how much main storage, in contiguous bytes, is to be allocated to each job step. Code the region parameter when you want more storage or less storage than would be allocated if the default region size was used; the default value is used if you do not code the REGION parameter on either the JOB or EXEC statement. The default region size is established as a PARM parameter field in the cataloged procedure for the input reader. You can consult the <u>Storage Estimates</u> publication to help you determine how much main storage is required to process your job.

AQUIRING ADDITIONAL MAIN STORAGE

If any of the job's steps may require use of more storage than has been allocated, you can code the ROLL parameter and request that the system try to provide you with additional main storage. The ROLL parameter is described in the chapters "The ROLL Parameter" later in this section and in Section III.

Examples of the REGION Parameter

1. //COLE JOB REGION=112K

Specifies that 112 contiguous 1024-byte areas of main storage are to be allocated to each job step.

2. //J34 JOB REGION=70K, ROLL=(YES, YES)

The REGION parameter specifies that 70 contiguous 1024-byte areas of main storage are to be allocated to each job step. In the ROLL parameter, the first subparameter tells the system that any of the job's steps may be rolled out if additional storage is required by another job; the second subparameter tells the system that it should try to provide you with main storage if it is required.

JOB

The REGION Parameter - With Main Storage Hierarchy Support (For MVT, Excluding M65MP)

REGION= (valueK, value, K)

valueK

specifies the number of contiguous 1024-byte areas in hierarchy 0 to be allocated to each job step. If IBM 2361 Core Storage is present, the number cannot exceed 16383.

value₁K

specifies the number of contiguous 1024-byte areas in hierarchy 1 to be allocated to each job step. If IBM 2361 Core Storage is present, the number cannot exceed 1024 (for each Model 1) or 2048 (for each Model 2).

Rules for Coding

- When processor storage includes hierarchies 0 and 1, the sum of value and value, cannot exceed 16383.
- Code even numbers. (If you code an odd number, the system treats it as the next highest even number. When 16383K is coded, the system treats it as 16384K. However, a sum of 16384K must not be coded on the JOB statement.)
- 3. When you are requesting storage only in hierarchy 1, precede value, with a comma, to indicate the absence of "value".
- 4. When you are requesting storage only in hierarchy 0, you need not code the parentheses.
- 5. Code the REGION parameter on EXEC statements, instead of the JOB statement, when you want to specify a different region size for each job step. (If the REGION parameter is coded on the JOB statement, REGION parameters coded on the job's EXEC statements are ignored.)
- If the REGION parameter is coded for MFT, the parameter is not used, but is checked for syntax.

Requesting Main Storage in One or Two Hierarchies

The REGION keyword parameter is used to specify how much main storage is to be allocated to each job step, and, when main storage hierarchy support has been specified at system generation, in which hierarchy or hierarchies main storage is to be allocated. With main storage hierarchy support, storage hierarchies 0 and 1 are provided. If IBM 2361 Core Storage, Model 1 or 2, is present in the system, processor storage is referred to as hierarchy 0 and 2361 Core Storage is referred to as hierarchy 1. If 2361 Core Storage is not present, a two-part region is established in processor storage when regions are requested in two hierarchies. The two parts are not necessarily contiguous.

Code the REGION parameter to specify how much storage is to be allocated in each hierarchy, or that all storage for the job is to be allocated in a particular hierarchy. (If you do not code the REGION parameter on either the JOB or EXEC statement, the default region size, which is a PARM parameter field in the cataloged procedure for the input reader, is used and is always allocated in hierarchy 0. If you code the REGION parameter and request storage only from hierarchy 1, no hierarchy 0 segment will be allocated. You can consult the Storage Estimates publication to help you determine how much main storage is required to

process your job. Then, depending on your reasons for using hierarchies, determine how much storage is required in each.

If main storage hierarchy support was not specified at system generation and regions are requested in both hierarchies, the region sizes are combined and an attempt is made to allocate a single region from processor storage. If a region is requested entirely from hierarchy 1, an attempt is made to allocate the region from processor storage.

ACQUIRING ADDITIONAL MAIN STORAGE

If your job may require use of more main storage than has been allocated in a particular hierarchy, you can code the ROLL parameter and request that the system try to provide you with additional main storage in that hierarchy. The ROLL parameter is described in the chapters "The ROLL Parameter" later in this section and in Section III.

Examples of the REGION Parameter

1. //MAIN JOB REGION= (80K,30K)

Specifies that the system is to allocate 80 contiguous 1024-byte areas of storage in hierarchy 0 and 30 contiguous 1024-byte areas of storage in hierarchy 1. If main storage hierarchy support is not included in the system, the system will try to obtain 110 contiguous 1024-byte areas in processor storage.

2. //WEEK JOB REGION=(,98K)

Specifies that the system is to allocate 98 contiguous 1024-byte areas of storage in hierarchy 1.

3. //JWC JOB REGION≔98K

Specifies that the system is to allocate 98 contiguous 1024-byte areas of storage in hierarchy 0.

4. //TEST12 JOB REGION=(100K, 50K), ROLL=(YES, YES)

The REGION parameter specifies that the system is to allocate 100 contiguous 1024-byte areas of storage in hierarchy 0 to 50 contiguous 1024-byte areas of storage in hierarchy 1. In the ROLL parameter, the first subparameter tells the system that any of the job's steps may be rolled out if additional storage is required by another job; the second subparameter tells the system that it should try to provide you with additional main storage if it is required.

The RESTART Parameter

indicates that execution is to be restarted at or within the first job step.

stepname

specifies that execution is to be restarted at or within the named job step.

stepname.procstepname

specifies that execution is to be restarted at or within a cataloged procedure step. Stepname is the name of the job step that calls the cataloged procedure, and procstepname is the name of the procedure step. You can code * in place of stepname.procstepname if the first job step calls a cataloged procedure and you want execution to be restarted at or within the first procedure step.

checkid

is the name of the checkpoint at which execution is to be restarted. When checkid is coded, execution is restarted <u>within</u> the specified job step at the named checkpoint. If checkid is not coded, execution is restarted at the specified job step.

Rules for Coding

- 1. You need not code the parentheses if execution is to be restarted at a job step, i.e., if you do not code the checkid subparameter.
- If the checkpoint name contains special characters, the name must be enclosed in apostrophes. If one of the special characters is an apostrophe, identify it by coding two consecutive apostrophes in its place.
- 3. Be sure to include the SYSCHK DD statement when execution is to be restarted within a job step. (The SYSCHK DD statement is described in the section titled "SYSCHK" in the chapter "Assigning a Ddname" in Section IV of this publication.)

When to Code the RESTART Parameter

The RESTART keyword parameter is coded when you are resubmitting a job for execution and you want to make use of the restart facilities. The restart facilities allow a job that is resubmitted for execution to be restarted at or within a particular job step. This reduces the time required to execute the job since execution is resumed, not repeated. If the RESTART parameter is not coded, execution of the entire job is repeated.

Through the RESTART parameter, you can specify where execution is to be restarted. Execution of a resubmitted job can be restarted at the beginning of a step (step restart) or within a step (checkpoint restart). In order for checkpoint restart to occur, the CHKPT macro instruction must have been executed in the processing program during the original execution of the job. If execution is to be restarted at a checkpoint, the resubmitted job must include an additional DD statement. This DD statement defines the checkpoint data set and has the ddname SYSCHK. (For additional information on the SYSCHK DD statement, see the

section titled "SYSCHK" in the chapter "Assigning a Ddname" in Section IV of this publication.)

RULES FOR REFERENCING GENERATION DATA SETS AND USING BACKWARD REFERENCES

Because the resubmitted job has been previously executed and because you may not be restarting with the first job step, there are certain rules that apply to referencing generation data sets and using backward references. They are:

- 1. If step restart is performed, <u>generation data sets</u> that were created and cataloged in steps preceding the restart step must not be referred to in the restart step or in steps following the restart step by means of the same relative generation numbers that were used to create them. Instead, you must refer to a generation data set by means of its present relative generation number. For example, if the last generation data set created and cataloged was assigned a generation number of +2, it would be referred to as 0 in the restart step and in steps following the restart step. In this case, the generation data set assigned a generation number of +1 would be referred to as -1. If generation data sets created in the restart step were kept instead of cataloged (i.e., DISP=(NEW,CATLG,KEEP) was coded), you can during checkpoint restart refer to these data sets and generation data sets created and cataloged in steps preceding the restart step by the same relative generation numbers used to create them.
- 2. Before resubmitting a job, check all backward references to steps that precede the restart step. Eliminate all backward references for the following keywords: PGM and COND, on the EXEC statements, and, SUBALLOC and VOLUME=REF=reference, on the DD statements. (A backward reference of VOLUME=REF=reference is allowed if the referenced statement includes VOLUME=SER=(serial number,...).)

Reference

1. For detailed information on the checkpoint/restart facilities, refer to the publication <u>Advanced Checkpoint/Restart Planning Guide</u>, the topic "Checkpoint and Restart" in the publication <u>Supervisor</u> <u>Services</u> and "Using the Restart Facilities" in Appendix B of this publication.

Examples of the RESTART Parameter

1. //LINES JOB RESTART=COUNT

Specifies that execution is to be restarted at the job step named COUNT.

2. //aLOC5 JOB RESTART=(PROCESS, CHKPT3)

Specifies that execution is to be restarted within the job step named PROCESS at the checkpoint named CHKPT3. This JOB statement must be followed by a DD statement named SYSCHK, which defines the data set or which an entry for the checkpoint named CHKPT3 was written.

3. //WORK JOB RESTART=(*,CKPT2)

Specifies that execution is to be restarted at the checkpoint named CKPT2 in the first job step.

4. //CLIP5 JOB RESTART=(PAY.WEEKLY, CHECK8)

Specifies that execution is to be restarted within the procedure step named WEEKLY at the checkpoint named CHECK8. PAY is the name of the job step that calls the cataloged procedure that contains the procedure step named WEEKLY. This JOB statement must be followed by a DD statement named SYSCHK, which defines the data set on which an entry for the checkpoint named CHECK8 was written.

JOB

The ROLL Parameter (For MVT)

ROLL=(x,y)

declares whether the steps of the job may be rolled out. Code YES if the job's steps can be rolled out; code NO if the job's steps cannot be rolled out.

declares whether the steps of the job may cause rollout of another job step. Code YES if the job's steps can cause rollout of another job step; code NO if the job's steps cannot cause rollout of another job step. YES must be coded if you want additional main storage allocated to the job's steps when additional main storage is required.

Rules for Coding

- 1. If you code the ROLL parameter, both subparameters must be specified.
- 2. Code the ROLL parameter on EXEC statements, instead of the JOB statement, when you want to make different requests for each job step. (If the ROLL parameter is coded on the JOB statement, ROLL parameters coded on the job's EXEC statements are ignored.)
- 3. Code ROLL=(NO,YES) or ROLL=(NO,NO) if this job is a teleprocessing job that uses the Auto Poll option. If you allow the job's steps to be rolled out, the job cannot be restarted properly.
- 4. If the ROLL parameter is coded for MFT, the parameter is not used, but is checked for syntax.

When to Code the ROLL Parameter

The ROLL keyword parameter should be coded if any of the job's steps may require more main storage than was requested in the REGION parameter. When you specify in the ROLL parameter that this job can cause rollout of other job steps, an attempt is made to allocate additional storage if a job step requires it. In order to allocate this additional space to a job step, another job step with a lower priority may have to be rolled out, i.e., temporarily transferred to secondary storage.

The ROLL parameter should also be coded when you want control over whether the job's steps can be rolled out because of another step's need for additional main storage. If the ROLL parameter is not coded, the default established in the PARM parameter field in the cataloged procedure for the input reader is used.

Examples of the ROLL Parameter

1. //DINTER JOB ROLL=(YES, YES), REGION=100K

Specifies that the job's steps can be rolled out and can cause rollout of another job step if a step requires more than 100K of main storage.

2. //TEST332 JOB ROLL=(NO, YES)

Specifies that the job's steps cannot be rolled out but can cause rollout of another job step.

The TIME Parameter

TIME= {(minutes, seconds)}

mi nutes

specifies the maximum number of minutes the job can use the CPU. The number of minutes must be less than 1440 (24 hours).

seconds

specifies the maximum number of seconds beyond the specified number of minutes the job can use the CPU, or, if no minutes are specified, the maximum number of seconds the job can use the CPU. The number of seconds must be less than 60.

1440

specifies that the job is not to be timed. Code 1440 if the job may require use of the CPU for 24 hours or more or if any of the job's steps should be allowed to remain in a wait state for more than the established time limit.

Rules for Coding

- If the CPU time limit is given in minutes only, you need not code the parentheses.
- If the CPU time limit is given in seconds only, you must code a comma preceding the seconds to indicate the absence of minutes.
- You can also code the TIME parameter on EXEC statements to indicate how long each step can use the CPU.

Specifying a Time Limit for the Job

The TIME keyword parameter can be used to specify the maximum amount of time a job may use the CPU. (CPU time will appear on the output listing if system management facilities (SMF) or users accounting routines supply this information to the output data set.) By coding the TIME parameter, you can limit the CPU time wasted by a step that goes into a loop. Normally, a job that exceeds the specified time limit is terminated. However, if the System Management Facilities option is included in the system and a user exit routine is provided, this routine can extend the time limit so that processing can continue. When the TIME parameter is not coded on the JOB statement, there is no CPU time limit assigned to the job; however, each job step is still timed.

TIME LIMIT FOR WAIT STATES

Since a job step can go into an extremely long wait state, the time a job step may remain in a wait state is limited. If the System Management Facilities option is included in the system, the installation determines this time limit. In this case, a job step remaining in a wait state for more than the established time limit causes termination of the job unless a user-provided exit routine extends the wait-state time limit for that step. If the System Management Facilities option is not included, the system automatically provides a 30-minute time limit for wait states; a job step remaining in a wait state for more than 30 consecutive minutes causes termination of the job.

How to Eliminate Timing

Certain applications require that a job use the CPU for 24 hours or more. In these cases you must eliminate job and step timing by coding TIME=1440. You should also code TIME=1440 when any of the job's steps should be allowed to remain in a wait state for more than the established time limit.

If your system includes the System Management Facilities (SMF) feature and you code TIME=1440, SMF termination messages will indicate that no CPU time was used; messages indicating the time the job started and stopped will not, however, be affected.

Reference

1. A discussion of the System Management Facilities option is contained in the <u>Introduction</u>. Information on user exit routines to be used with the System Management Facilities option is contained in the <u>System Management Facilities</u> Guide.

Examples of the TIME Parameter

1. //SEED JOB TIME=(12,10)

Specifies that the maximum amount of time the job can use the CPU is 12 minutes 10 seconds.

2. //TYPE41 JOB TIME=(,30)

Specifies that the maximum amount of time the job can use the CPU is 30 seconds.

3. //FORMS JOB TIME=5

Specifies that the maximum amount of time the job can use the CPU is 5 minutes.

4. //RAINCK JOB TIME=1440

Specifies that the job is not to be timed. Therefore, the job may use the CPU and may remain in a wait state for an unspecified period of time.

The TYPRUN Parameter (For MFT, MVT)

TYPRUN=HOLD

HOLD

specifies that the job is to be held in the job queue until the operator issues a RELEASE command.

Holding a Job

Code TYPRUN=HOLD when the job should be held for execution until some event has occurred. The operator must be informed of what it is you are waiting for. When the event has occurred, the operator issues a RELEASE command, thereby allowing the job to be selected for processing.

Example of the TYPRUN Parameter

Jobs UPDATE and LIST are to be submitted for execution. The job UPDATE uses a program that adds and deletes members of a library; the job LIST uses a program that lists the members of a library. In order to get an up-to-date listing of the library, UPDATE must be executed before LIST. This is accomplished by coding TYPRUN-HOLD on the JOB statement for the job named LIST. If a DISPLAY JOBNAMES command is issued by you or the operator, the operator is notified on the console when UPDATE has completed processing; he issues a RELEASE command for LIST. The job LIST can then be selected for execution.

Section III: The EXEC Statement

The EXEC statement is the first statement of each job step and cataloged procedure step. The EXEC statement is followed by DD statements and data that pertain to the step. The principal function of the EXEC statement is to identify the program to be executed or the cataloged procedure to be called. All other parameters in the operand field are optional. A job cannot contain more than 255 job steps and procedure steps.

EXEC Statement Format

//stepname EXEC operands comments

The EXEC statement consists of the characters //, in columns 1 and 2, and four fields -- the name, operation (EXEC), operand, and comments fields.

Rules for Coding

Follow the order listed below when coding the EXEC statement:

1. Code the characters // in columns 1 and 2.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80
1234567890	1234567890	1234567890	1234567890	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1234567890	1 2 3 4 5 6 7 8 9 0
11							
							

 Optionally, you may assign a name to the job step; if you do, code the stepname starting in column 3.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80
1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890
110000							
I.I.S.TEP.I						Luci	

- 3. Follow the stepname or // with at least one blank.
- 4. Code EXEC.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80
1234567890	1234567890	1234567890	1234567890	1234567890	1 2 3 4 5 6 7 8 9 0	1234567890	1234567890
I.I.ST.EP.I. EX	EC	 					

- 5. Follow EXEC with at least one blank.
- 6. Identify the program to be executed (PGM), or the cataloged procedure to be called (PROC). (When you are calling a procedure, you may omit PROC=.)

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80		
1234567890	1234567890	1234567890	1234567890	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0		
112345678901123456789011234567890112345678901123456789011234567890112345678901123456789011234567890									

Code any desired keyword parameters. Separate each parameter with a comma.

Γ	1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80
	1 2 3 4 5 6 7 8 9 0	1234567890	1234567890	1 2 3 4 5 6 7 8 9 0	1234567890	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 234567890
	ISTEPI EX	EC PEM=XER	I.F.Y. PARM=	4.8.4.3. 17.+M'.	ACCT = DINTE	 		

- 8. Code at least one blank.
- 9. Code any desired comments.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80		
1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1234567890	1234567890	1234567890	11234567890	1234567890	1234567890		
11 STEIR! EXEC. PEM=HERITEY. PARM="12843, 17+M", ACCT=DINTER BOBI CHECK OUTRUT									

Positional and Keyword Parameters

There are two types of parameters that can be coded on the EXEC statement:

<u>Positional parameters</u> must precede any keyword parameters. One of the following two parameters is coded:

PGM PROC

These positional parameters are described in the following pages.

<u>Keyword parameters</u> may be coded in any order after the first parameter. Any of the following keyword parameters can be coded on the EXEC statement:

ACCT
COND
DPRTY (MVT only)
PARM
RD
REGION (MVT only)
ROLL (MVT only)
TIME

These keyword parameters are described, after the positional parameters, alphabetically.

Sample EXEC Statements

```
1. //STEP4 EXEC PGM=DRBC, PARM='3018, NO'
```

2. // EXEC PGM=ENTRY, REGION=80K, TIME=(2,30), DPRTY=(11,11)

3. //FOR EXEC PROC=PE489, TIME=4

4. //PIC4 EXEC SAL83, ACCT. STEP1=123019

Assigning a Stepname

//stepname EXEC

The stepname identifies a job step within a job. The stepname is optional. You must assign a stepname if you wish to do any of the following:

- 1. Make backward references to the step.
- Override parameters on an EXEC statement or DD statement in a cataloged procedure step, and add DD statements to a cataloged procedure step.
- 3. Perform a step or checkpoint restart at or within the step.

The stepname must begin in column 3 of the EXEC statement and must consist of 1 through 8 alphameric and national (0, #, \$) characters. The first character must be an alphabetic or national character. Each stepname within a job or a cataloged procedure must be unique.

Examples of Valid Stepnames

- 1. //STEP4 EXEC
- 2. //aLOC EXEC
- 3. //PRINT EXEC

The PGM Parameter

PGM= (program name *.stepname.ddname *.stepname.procstepname.ddname)

program name

is the member name or alias of the program to be executed. The program must be a member of a partitioned data set that resides in a temporary, system, or private library.

*.stepname.ddname

is a backward reference to a DD statement that defines, as a member of a partitioned data set, the program to be executed; stepname is the name of the step in which the DD statement appears. Usually, this form is used when a previous job step creates a temporary partitioned data set to store one program until the program is required.

*.stepname.procstepname.ddname

is a backward reference to a DD statement within a cataloged procedure step that defines, as a member of a partitioned data set, the program to be executed. Stepname is the name of the step that calls the procedure, and procstepname is the name of the procedure step that contains the DD statement. Usually, this form is used when a cataloged procedure step, called by an earlier job step in the job, creates a temporary partitioned data set to store a program until the program is required.

Note: The stepname must begin in column 3 of the EXEC statement and must consist of 1 through 8 alphameric or national (0, #, \$) characters. The first character must be an alphabetic or national character. Each stepname within a job or a cataloged procedure must be unique.

Identifying the Program to be Executed

All programs that can be executed are members of partitioned data sets (libraries). The library that contains the program may be a temporary library, the system library, or a private library. In order to execute a program contained in any of these libraries, you must code the PGM parameter as the first parameter on the EXEC statement.

TEMPORARY LIBRARY

If in a job you want to assemble, linkage edit, and then execute a program, you must make the output of the linkage editor a member of a partitioned data set. This is accomplished by creating a temporary library. A temporary library is a partitioned data set created in the job to store a program, as a member of the data set, until it is executed in a following job step. When the program is required, you may refer back to the DD statement that defines the temporary library and the member by coding PGM=*.stepname.ddname or PGM=*.stepname.procstepname.ddname. You may also request use of a program that is a member of a temporary library by coding PGM=program name and including a DD statement named JOBLIB or STEPLIB that defines the temporary library. (Information on the JOBLIB and STEPLIB DD statements can be found in the chapter "Assigning a Ddname" in Section IV of this publication.)

If you want to keep this program available for use by other jobs, you must make the program a member of the system library or a private library.

SYSTEM LIBRARY

The system library is a partitioned data set named SYS1.LINKLIB and it contains frequently used programs, as well as programs used by the system. You request the use of a program that is a member of the system library simply by coding PGM=program name. The system automatically looks in SYS1.LINKLIB for a member with the corresponding name.

A program that resides in the system library may also be executed by coding PGM=*.stepname.ddname or PGM=*.stepname.procstepname.ddname. This can be done only when the named DD statement defines the program as a member of the system library.

EXEC

PRIVATE LIBRARY

A private library is a partitioned data set that contains programs not used frequently enough to warrant their inclusion in the system library. You request use of a program that is a member of a private library by coding PGM=program name and including a DD statement named JOBLIB or STEPLIB that defines the private library. The system automatically looks in the private library and, if the program is not found there, in SYS1.LINKLIB for a member with the corresponding name. (Information on the JOBLIB and STEPLIB DD statements can be found in the sections titled "JOBLIB" and "STEPLIB" in the chapter "Assigning a Ddname" in Section IV of this publication.)

A program that resides in the private library may also be executed by coding PGM=*.stepname.ddname or PGM=*.stepname.procstepname.ddname. This can be done only when the named DD statement defines the program as a member of a private library.

THE IEFBR14 PROGRAM

This is a small program which, when called, gives a return code of 0 and returns to the calling routine. Its purpose is for either checking the syntax of the control statements or for allocating or unallocating data sets prior to executing your program. To use this program, substitute IEFBR14 for your program's name. (If you created a data set when using this program, the data set's status will be old when you execute your own program.)

Examples of the PGM Parameter

1. //STEP1 EXEC PGM=TABULATE

Specifies that the program named TABULATE is a member of SYS1.LINKLIB.

2. //JOB8 JOB MSGLEVEL=(2,0) //JOBLIB DD DSNAME=DEPT12.LIB4, DISP=(OLD, PASS) //STEP1 EXEC PGM=USCAN

Specifies that the system is to look for a program named USCAN in a private library named DEPT12.LIB4, and, if not found there, the system is to look in the system library.

3. //STEP2 EXEC PGM=UPDT //DDA DD DSNAME=SYS1.LINKLIB(P40),DISP=OLD //STEP3 EXEC PGM=*.STEP2.DDA

SYS1.LINKLIB and is executed in the step named STEP3.

Use of backward reference to a DD statement that defines the system library. The program named P40 is stored as a member of

4. //CHECK EXEC PGM=IEFBR14

Executing the program named IEFBR14 allows you to satisfy space allocation and disposition processing requests prior to executing your program. The remaining job control statements in the job are also checked for syntax.

The PROC Parameter

PROC=procedure name procedure name

procedure name

the member name (or alias) of the cataloged procedure or the name of the in-stream procedure to be called.

Identifying the Cataloged or In-Stream Procedure to be Called

A cataloged procedure is a set of job control statements that has been placed in a special partitioned data set referred to as the procedure library. (The IBM-supplied procedure library is named SYS1.PROCLIB; at particular installations, there may be additional procedure libraries, which would have different names.) Each cataloged procedure is a member of this data set. An in-stream procedure is a set of job control statements, beginning with a PROC statement and ending with a PEND statement, that have been placed in the input stream. An in-stream procedure can be executed any number of times during the job in which it appears. Both cataloged and in-stream procedures consist of one or more procedure steps; each procedure step consists of an EXEC statement, which identifies the program to be executed, and DD statements, which define the data set requirements of the step.

In order to use a cataloged or in-stream procedure, you must code the PROC statement as the first parameter on the EXEC statement, instead of the PGM parameter, and give the name of the cataloged procedure. You can, instead, code only the cataloged or in-stream procedure name; the job scheduler will recognize that it is a procedure name since it must appear first in the operand field.

When the EXEC statement specifies that a cataloged or in-stream procedure is to be called, subsequent parameters in the operand field can be used to override EXEC statement parameters in the procedure. Also, any DD statements that follow the EXEC statement are either overriding DD statement or DD statements that are to be added to the cataloged or in-stream procedure for the duration of the job step. Overriding or adding to cataloged procedures is discussed in the chapter "Using Cataloged and In-stream Procedures" in Appendix A of this publication.

Examples of the PROC Parameter

//SP3 EXEC PROC=PAYWKRS

Specifies that the cataloged or in-stream procedure named PAYWKRS is to be called.

2. //BK3 EXEC OPERATE

Specifies that the cataloged or in-stream procedure named OPERATE is to be called. This specification has the same effect as coding PROC=OPERATE.

The ACCT Parameter

ACCT=(accounting information,...)

accounting information

includes one or more subparameters of accounting information to be passed to the installation's accounting routines by the system.

Rules for Coding

- 1. If the accounting information includes several subparameters, each must be separated by a comma.
- If the accounting information consists of only one subparameter, you need not code the parentheses.
- 3. The maximum number of characters of accounting information, plus the commas that separate the subparameters, is 142.
- 4. If a subparameter contains special characters (other than a hyphen), enclose the subparameter in apostrophes. The apostrophes are not considered part of the information. If one of the special characters is an apostrophe, code two consecutive apostrophes in its place. The same is true for the special character &. In order to include & within the apostrophes, code &&.

Providing Accounting Information for a Job Step or Procedure Step

Code the ACCT keyword parameter when you want to provide accounting information for a step. If the job step calls a cataloged procedure, the ACCT parameter overrides any ACCT parameters coded in the procedure steps and pertains to all the procedure steps. If different steps in the procedure require different accounting information, code ACCT. procstepname=(accounting information,...) for each step that requires accounting information. Accounting information will then pertain only to the named procedure step.

Examples of the ACCT Parameter

- 1. //STEP1 EXEC PGM=JP5, ACCT= (LOCATION8, 'CHGE+3')
 - Specifies that this accounting information pertains to this job step.
- 2. //STP3 EXEC LOOKUP, ACCT=('/83468')

Specifies that this information pertains to this job step. Since this step calls a cataloged procedure, the accounting information pertains to all the steps in the procedure.

- 3. //STP4 EXEC BILLING, ACCT.PAID=56370, ACCT.LATE=56470, ACCT.BILL='121+366'
 - Specifies that different accounting information pertains to each of the named procedure steps (PAID, LATE, and BILL).

The COND Parameter

code

a decimal number from 0 through 4095. This number is compared with the return code issued by all previous steps or a specific step.

operator

the type of comparison to be made with the return code. Relational operators and their meanings are:

GT...greater than

GE...greater than or equal to

EQ...equal to

LT...less than

LE...less than or equal to

NE...not equal to

stepname

the name of a preceding job step that issued the return code to be tested.

stepname.procstepname

the name of a procedure step "procstepname" that issued the return code to be tested; the procedure step is part of a procedure that was called by an earlier job step named "stepname."

EVEN

specifies that the job step is to be executed even if one or more of the preceding job steps have abnormally terminated. If the current job step specifies that return code tests are to be made and if any of the tests are satisfied, this job step is bypassed. Do not code EVEN when ONLY is coded.

ONLY

specifies that the job step is to be executed only if one or more of the preceding job steps have abnormally terminated. If the current job step specifies that return code tests are to be made and if any of the tests are satisfied, this job step is bypassed. Do not code ONLY when EVEN is coded.

Rules for Coding

- 1. When neither EVEN nor ONLY is coded, you can make as many as eight tests on return codes issued by preceding job steps or cataloged procedure steps, which completed normally. When either EVEN or ONLY is coded, you can make as many as seven tests on return codes.
- If you want only one test made, you need not code the outer parentheses.
- If you code only EVEN or ONLY, you need not enclose it in parentheses.
- 4. If you want each return code test to be made on the return code issued by every preceding step, do not code a stepname.

5. The EVEN or ONLY subparameter can appear before, between, or after return code tests.

Using the COND Parameter

The COND keyword parameter can be used to eliminate unnecessary use of computing time by basing the execution of a job step on the successful completion of one or more preceding job steps. When the COND parameter is coded on the JOB statement, any return code test that is satisfied causes all remaining job steps to be bypassed. If, instead, you want a particular job step to be bypassed when a return code test is satisfied, code the COND parameter on the EXEC statement. Besides allowing you to specify the conditions for bypassing a job step, the COND parameter allows you to specify the condition for executing a job step.

The compiler, assembler, and linkage editor programs issue return codes. You may want to use the COND parameter to test these return codes. If you write your processing programs in assembler language, ANS COBOL, FORTRAN, or PL/I, you can use the COND parameter to test return codes issued by your programs.

BYPASSING A JOB STEP

The return code tests specified in the COND parameter determine whether a job step is to be bypassed. Each return code test consists of a code, an operator, and, optionally, a stepname. The operator indicates the mathematical relationship between the code specified on the EXEC statement and the code returned by a completed job step. The operator or operators are compared with the return code or codes and if any of the relationships are true, the job step is bypassed.

If the return code test includes a stepname, the test is made using the return code issued by the named step. If the named step was not executed, the request for a test is ignored. If the return code test does not include a stepname, the test is made using the return code issued by every preceding job step that completed normally. To test in a later job step the return code issued by a cataloged procedure step, specify both the name of the job step that called the procedure and the procedure stepname, i.e., stepname.procstepname.

EXECUTING A JOB STEP

Abnormal termination of a job step normally causes subsequent steps to be bypassed and the job to be terminated. By means of the COND parameter, you can specify the condition for executing a job step after one or more of the preceding job steps have abnormally terminated. For the COND parameter, a job step is considered to abnormally terminate if a failure occurs within the user's program once it has received control. (If, during scheduling, a job step is not scheduled for execution because of failures such as job control language errors or inability to allocate space, the remainder of the job steps are bypassed, whether or not a condition for executing a later job step was specified.)

The condition for executing a job step after one or more of the preceding job steps have abnormally terminated is either EVEN or ONLY. EVEN causes the step to be executed even if one or more of the preceding job steps have abnormally terminated; ONLY causes the step to be executed only if one or more of the preceding job steps have abnormally terminated. When a job step abnormally terminates, the COND parameter on the EXEC statement of the next step is scanned for the EVEN or ONLY subparameter. If neither is specified, the next job step is bypassed and the EXEC statement of the following step is scanned for EVEN or ONLY. If

EXEC

EVEN or ONLY is specified, return code tests, if any, are made on all previous steps specified that did not abnormally terminate. The step is bypassed if any one of these tests is satisfied, or if one of the previous job steps abended because it exceeded the time limit for the job. Otherwise, the job step is executed.

<u>Caution</u>: When a job step that contains the EVEN or ONLY subparameter refers to a data set that was to be created or cataloged in a preceding step, the data set (1) will not exist if the step creating it was bypassed, or (2) may be incomplete if the step creating it abnormally terminated. Also, if the job step refers the system to an earlier job step for volume and unit information, this information is not available if the earlier job step was bypassed. If ONLY is specified on the first job step and a JOBLIB is being used, the unit and volume information are not passed to the succeeding step and the catalog will be searched for the JOBLIB data set.

WHEN YOU CALL A CATALOGED PROCEDURE

The COND parameter may be coded on the EXEC statement of a cataloged procedure step. If the job step calls a cataloged procedure, you may want to override all COND parameters in the procedure or only certain COND parameters. To override all COND parameters, code the COND parameter on the EXEC statement that calls the procedure. This establishes one set of return code tests and the EVEN or ONLY subparameter for all steps in the procedure. To override only certain COND parameters, code, on the EXEC statement that calls the procedure, COND.procstepname for each procedure step that you want to override. Return code tests and the EVEN or ONLY subparameter will then pertain only to the named procedure step. When the condition parameter appears on both JOB and EXEC statements, the conditions on the JOB card override those on the EXEC.

Examples of the COND Parameter

1. //STEP6 EXEC PGM=BAB, COND= (4,GT,STEP3)

If 4 is greater than the return code issued by STEP3, this step is bypassed. (A return code of 4 or greater from STEP3 allows this step (STEP6) to be executed.) If STEP3 was not executed, however the request for a test is ignored. Since neither EVEN nor ONLY is specified, this job step is automatically bypassed if a preceding step abnormally terminates.

2. //TEST 2 EXEC PGM=BACK, COND=((16,GE), (90,LE,STEP1), ONLY)

If 16 is greater than or equal to the return code issued by any of the preceding job steps or if 90 is less than or equal to the return code issued by STEP1, this step is bypassed. If none of the tests are satisfied and a preceding job step has abnormally terminated, this step is executed because ONLY is coded.

3. //PRCH EXEC PGM=SPE, COND= (12, EQ, STEP 4. LOOKUP)

If 12 is equal to the return code issued by the procedure step named LOOKUP, the job step is bypassed. Since neither EVEN nor ONLY is specified, this job step would be automatically bypassed if a preceding step abnormally terminated.

4. //STP4 EXEC BILLING, COND.PAID=(EVEN, (20,LT)), X
// COND.LATE=(60,GT,FIND), COND.BILL=((20,GE),(30,LT,CHGE))

Specifies that different return code tests pertain to each of the named cataloged or in-stream procedure steps (PAID, LATE, and BILL). If the return code test specified for the procedure step named PAID is not satisfied, the step is executed even if a preceding step abnormally terminated.

The DPRTY Parameter (For MVT)

DPRTY= (value1, value2)

value1

a number from 0 through 15. If you do not assign a number, a value of 0 is assumed.

value2

a number from 0 through 15. If you do not assign a number, a value of 11 is assumed.

Rules for Coding

- Avoid assigning a number of 15 to value1. This number is used for certain system tasks.
- 2. If you omit value2, you need not code the parentheses.
- If you omit value1, you must code a comma preceding value2 to indicate the absence of value1.
- 4. If the DPRTY parameter is coded for MFT, the parameter is not used, but is checked for syntax.

Assigning a Dispatching Priority

The DPRTY parameter is used to assign a dispatching priority to a job step. Dispatching priority determines in what order tasks will use main storage and CPU resources. If you do not code the DPRTY parameter, the job step is assigned the priority assigned to the job either on the JOB statement (the PRTY parameter) or by default.

Value1 of the DPRTY parameter has the same meaning as the value you assign in the PRTY parameter on the JOB statement. That is, if you code PRTY=10 on the JOB statement and DPRTY=10 on the EXEC statement, the job and step priority are the same. Also, in this case the job and step have the same dispatching priority. This is because the system converts the number 10 to an internal priority and then adds 11 to the internal priority to form the dispatching priority (11 is always the number added to the job's internal priority; 11 is the number added to the job step's internal priority when value2 of the DPRTY parameter is omitted).

If you code value of the DPRTY parameter, the system adds that value to the internal priority to form the dispatching priority. (The internal priority is formed by the system by converting the value assigned to value1 in the DPRTY parameter.)

When you want the job step to have a different dispatching priority than the job, you code the DPRTY parameter and either raise or lower the values, depending on whether the step is to have a higher or lower priority than the job.

If the DPRTY parameter specifies a dispatching priority greater than the imitiator's, the initiator's priority will be used.

THE DPRTY PARAMETER AND TIME-SLICING

If your installation provides time-slicing facilities in a system with MVT, the DPRTY parameter can be used to make a job step part of a group of jobs and job steps to be time-sliced. (To make an entire job part of a group of jobs and job steps to be time-sliced, code the PRTY parameter on the JOB statement.) At system generation, the priorities of the time-sliced groups are selected. If the number assigned to "value1" corresponds to a priority number selected for time-slicing and "value2" is either omitted or assigned a value of 11, then the job step's tasks will be time-sliced.

WHEN YOU CALL A CATALOGED PROCEDURE

The DPRTY parameter may be coded on the EXEC statement of a cataloged procedure step. If the job step calls a cataloged procedure, you may want to override all DPRTY parameters in the procedure or only certain DPRTY parameters. To override all DPRTY parameters, code the DPRTY parameter on the EXEC statement that calls the procedure. This establishes one dispatching priority for all the steps in the procedure. To override only certain DPRTY parameters, code, on the EXEC statement that calls the procedure, DPRTY.procstepname for each procedure step that you want to override. The dispatching priority will then pertain only to the named procedure step.

Examples of the DPRTY Parameter

1. //BP2 EXEC PGM=FOUR, DPRTY= (13,9)

The system uses these numbers to form a dispatching priority for this step. Since the numbers are high, the dispatching priority will be high.

EXEC PGM=BROWN31, DPRTY=(,12) 2. //STEP3

The system first assigns a value of 0 to the absent subparameter and then forms a dispatching priority. In this case, the dispatching priority will be very low.

3. //ST2 EXEC COMP, DPRTY=4

> The system assigns a dispatching priority of 4 to all steps in the procedure named COMP.

The PARM Parameter

PARM=value

value

consists of up to 100 characters of information or options that the system is to pass to the processing program.

Rules for Coding

- 1. If the value contains more than one expression separated by commas, the value must be enclosed in apostrophes or parentheses, e.g., PARM='P1,123,MT5' or PARM=(P1,123,MT5). (Enclosing apostrophes and parentheses are not passed to the processing program; commas within apostrophes and parentheses are passed as part of the value.)
- 2. If any expression contains special characters, either (1) enclose the value in apostrophes, or (2) enclose the expression in apostrophes and the value in parentheses, e.g., PARM='P50,12+80' or PARM=(P50,'12+80'). (The enclosing apostrophes and parentheses are not considered part of the value.) If one of the special characters is an apostrophe, code two consecutive apostrophes in its place, e.g., PARM='CONTROL INFORM''N'. If one of the special characters is an ampersand and you are not defining a symbolic parameter, code two consecutive ampersands in its place, e.g., PARM='3462&&5'. (When two apostrophes or two ampersands are coded, only one is passed to the processing program.)
- 3. If the value must be continued on another statement, enclose the value in parentheses. The continuation comma is considered part of the value field and counts towards the maximum of 100 characters of data. You may not continue on another statement any value enclosed in apostrophes.

Providing a Processing Program With Information at Execution Time

Some information required by a program may vary from application to application, such as module attributes and options required by compiler, assembler, and linkage editor programs. In order to provide this information to the program at the time it is executed, you can code the PARM keyword parameter. The program must include instructions that can retrieve this information. (The exact location and format of the information passed to a processing program are described in Supervisor Services and Macro Instructions.

WHEN YOU CALL A CATALOGED OR IN-STREAM PROCEDURE

The PARM parameter may be coded on the EXEC statement of a cataloged or in-stream procedure step. If the job step calls a cataloged or in-stream procedure, you can pass information to the first procedure step and nullify all other PARM parameters in the procedure or override some of the PARM parameters contained in the procedure. To accomplish the first, code the PARM parameter on the EXEC statement that calls the procedure. The information contained in the PARM parameter is passed to the first procedure step and PARM parameters in all other procedure steps are nullified. To override some of the PARM parameters contained in the procedure, code, on the EXEC statement that calls the procedure, PARM.procstepname for each procedure step that you want to override. Information provided is passed only to the named procedure step.

Examples of the PARM Parameter

1. //RUN3 EXEC PGM=APG22, PARM= (P1,123, 'P2=5')

The system passes the information in the PARM parameter, except the apostrophes, to the processing program named APG22.

2. // EXEC PROC81, PARM=MT5

The system passes this information to the first step of the procedure named PROC81. If any of the other procedure steps contain the PARM parameter, these parameters are nullified.

//STP6 EXEC ASMFCLG, PARM.LKED= (MAP, LET)

The system passes this information to the procedure step named LKET If any of the other procedure steps contain the PARM parameter, these parameters are still in effect.

R

specifies that automatic step restart is permitted.

RNC

specifies that automatic step restart is permitted and automatic checkpoint restart is not permitted and no checkpoints can be established.

NC

specifies that neither automatic step restart nor automatic checkpoint restart is permitted and no checkpoints can be established.

NR

specifies that neither automatic step restart nor automatic checkpoint restart is permitted, but the CHKPT macro instruction can establish a checkpoint.

Rules for Coding

- Be sure to code MSGLEVEL=(1,1), MSGLEVEL=(1,0), or MSGLEVEL=1 when RD=R or RD=RNC is specified.
- If you are permitting automatic step restart, assign the step a unique step name.
- If you have coded the RD parameter on the JOB statement, RD parameters on the job's EXEC statements are ignored.

Using the Restart Facilities

The RD (restart definition) keyword parameter is coded when you want to make use of the step restart facilities, to suppress the action of the CHKPT macro instruction, or to suppress automatic restarts. The step restart facilities permit execution of a job to be automatically restarted at a job step after the job abnormally terminates or after a system failure occurs. Through the RD parameter, you can specify that execution of a job step is to be automatically restarted at the beginning of the step if it abnormally terminates (step restart).

Execution of a job step can also be automatically restarted within the step if it abnormally terminates (checkpoint restart). In order for checkpoint restart to occur, the CHKPT macro instruction must have been executed in the processing program before abnormal termination. When you use the RD parameter to request suppression of the CHKPT macro instruction action, automatic checkpoint restart cannot occur.

If the RD parameter is not coded, step restart cannot occur. If the RD parameter is not coded and the processing program contains CHKPT macro instructions, checkpoint restart can occur.

The following three conditions must be met before automatic step or checkpoint restart can occur: (1) the completion code returned during abnormal termination indicates that the step is eligible for restart, (2) the operator authorizes restart, and (3) MSGLEVEL=(1,0),

MSGLEVEL=(1,1), or MSGLEVEL=1 must be coded on the JOB statement. If these conditions are satisfied, special disposition processing is performed before restart. If automatic step restart is to occur, all data sets in the restart step with a status of OLD or MOD, and all data sets being passed to steps following the restart step, are kept. All data sets in the restart step with a status of NEW are deleted. If automatic checkpoint restart is to occur, all data sets currently in use by the job are kept.

DEFINING RESTART

You define the type of restart that can occur by coding one of the subparameters of the RD parameter: R, RNC, NC, or NR. Each of these subparameters is described in detail in the following paragraphs.

<u>RD=R</u>: R indicates that automatic step restart is permitted. If the processing program used by the job step does not include any CHKPT macro instructions, coding RD=R allows execution to be resumed at the beginning of this step if it abnormally terminates. If the program does include a CHKPT macro instruction, coding RD=R permits automatic step restart to occur only if the step abnormally terminates before execution of the CHKPT macro instruction; thereafter, only checkpoint restart can occur. If you cancel the effects of the CHKPT macro instruction before a checkpoint restart is performed, the request for automatic step restart is again in effect.

<u>RD=RNC</u>: RNC indicates that automatic step restart is permitted and automatic checkpoint restart is not permitted. RD=RNC should be specified when you want to suppress the action of all CHKPT macro instructions included in the processing program and to permit automatic step restart.

<u>RD=NC</u>: NC indicates that neither automatic step restart nor automatic checkpoint restart is permitted. RD=NC should be specified when you want to suppress the action of all CHKPT macro instructions included in the processing program and not to permit automatic step restart. RD=NC has no effect on processing if CHKPT macro instructions are not included in the program.

<u>RD=NR</u>: NR indicates that a CHKPT macro instruction can establish a checkpoint, but neither automatic step restart nor automatic checkpoint restart is permitted. Coding RD=NR allows you to resubmit the job at a later time and specify in the RESTART parameter the checkpoint at which execution is to be resumed. (The RESTART parameter is coded on the JOB statement of the resubmitted job.) RD=NR has no effect on processing if CHKPT macro instructions are not included in the program.

WHEN YOU CALL A CATALOGED PROCEDURE

The RD parameter may be coded on the EXEC statement of a cataloged procedure step. If the job step calls a cataloged procedure, you may want to override all RD parameters in the procedure or only certain RD parameters. To override all RD parameters, code the RD parameter on the EXEC statement that calls the procedure. This establishes one restart request for all the steps in the procedure. To override only certain RD parameters, code, on the EXEC statement that calls the procedure, RD.procstepname for each procedure step that you want to override. The restart request will then pertain only to the named procedure step.

References

- 1. For detailed information on the checkpoint/restart facilities, refer to the publication <u>Advanced Checkpoint/Restart Planning Guide</u>, the topic "Checkpoint and Restart" in the publication <u>Supervisor</u> <u>Services and Macro Instructions</u>, and "Using the Restart Facilities" in Appendix B of this publication.
- 2. For information on how to code the CHKPT macro instruction, refer to the publication Supervisor Services and Macro Instructions.

Examples of the RD Parameter

EXEC

1. //STEP1 EXEC PGM=GIIM, RD=R

Permits execution to be automatically restarted with this step if it abnormally terminates.

2. //NEST EXEC PGM=T18.RD=RNC

Permits execution to be automatically restarted with this step if it abnormally terminates; suppresses the action of CHKPT macro instructions issued in the program this job step uses.

3. //CARD EXEC PGM=WTR, RD=NR

Neither automatic step restart nor automatic checkpoint restart can occur, but CHKPT macro instructions issued in the program that this job step executes can establish checkpoints.

4. //STP4 EXEC BILLING, RD. PAID=NO, RD. BILL=NR

Specifies that different restart requests pertain to each of the named procedure steps (PAID and BILL).

The REGION Parameter - Without Main Storage Hierarchy Support (For MVT)

REGION=value K

valueK

specifies the number of contiguous 1024-byte areas of main storage to be allocated to the job step. The number can range from one to five digits but may not exceed 16383.

Rules for Coding

- Code an even number. (If you code an odd number, the system treats it as the next highest even number. When the value 16383K is coded, the system treats it as 16384K. However, the value 16384K must not be coded on the EXEC statement.)
- 2. If you have coded the REGION parameter on the JOB statement, REGION parameters on the job's EXEC statements are ignored.
- 3. If the REGION parameter is coded for MFT, the parameter is not used, but is checked for syntax.

Requesting Main Storage

The REGION keyword parameter is used to specify how much main storage, in contiguous bytes, is to be allocated to the job step. Code the REGION parameter when you want more storage or less storage than would be allocated if the default region size was used. The default region size is established as a PARM parameter field in the cataloged procedure for the input reader. You can consult the Storage Estimates publication to help you determine how much main storage is required to process your job.

ACQUIRING ADDITIONAL MAIN STORAGE

If the step may require use of more main storage than has been allocated, you can code the ROLL parameter on either the JOB statement or EXEC statement and request that the system try to provide you with additional main storage. The ROLL parameter is described in the chapters "The ROLL parameter" later in this section and in Section II.

WHEN YOU CALL A CATALOGED PROCEDURE

The REGION parameter may be coded on the EXEC statement of a cataloged procedure step. If the job step calls a cataloged procedure, you may want to override all REGION parameters in the procedure or only certain REGION parameters. To override all REGION parameters, code the REGION parameter on the EXEC statement that calls the procedure. Each procedure step will be allocated the same amount of storage. To override only certain REGION parameters, code, on the EXEC statement that calls the procedure, REGION.procstepname for each procedure step that you want to override. The requested region size will then be allocated only to the named procedure step.

Examples of the REGION Parameter

1. //JUNE EXEC PGM=A1403, REGION=112K

Specifies that 112 contiguous 1024-byte areas of main storage are to be allocated to the job step.

2. //STP2 EXEC PGM=RATL, REGION=70K, ROLL=(YES, YES)

The REGION parameter specifies that 70 contiguous 1024-byte areas of main storage are to be allocated to the job step. In the ROLL parameter, the first subparameter tells the system that this step may be rolled out if additional storage is required by another job; the second subparameter tells the system that it should try to provide this step with additional main storage if it is required.

EXEC

3. //STP4 EXEC BILLING, REGION.LATE=80K, REGION.BILL=108K

Specifies that different region sizes are to be allocated to the named procedure steps (LATE and BILL).

The REGION Parameter - With Main Storage Hierarchy Support (For MVT, Excluding M65MP)

REGION=(valueK, value_K)

valueK

specifies the number of contiguous 1024-byte areas in hierarchy 0 to be allocated to the job step. If IBM 2361 Core Storage is present, the number cannot exceed 16383.

value₁K

specifies the number of contiguous 1024-byte areas in hierarchy 1 to be allocated to the job step. If IBM 2361 Core Storage is present, the number cannot exceed 1024 (for each Model 1) or 2048 (for each Model 2).

Rules for Coding

- When processor storage includes hierarchies 0 and 1, the sum of value and value, cannot exceed 16383.
- Code even numbers. (If you code an odd number, the system treats it as the next highest even number. When 16383K is coded the system treats it as 16384K. However, a sum of 16384K must not be coded on the EXEC statement.)
- When you are requesting storage only in hierarchy 1, precede value, with a comma, to indicate the absence of value.
- 4. When you are requesting storage only in hierarchy 0, you need not code the parentheses.
- 5. If you have coded the REGION parameter on the JOB statement, REGION parameters on the job's EXEC statements are ignored.
- If the REGION parameter is coded for MFT, the parameter is not used, but is checked for syntax.

Requesting Main Storage in One or Two Hierarchies

The REGION keyword parameter is used to specify how much main storage is to be allocated to each job step, and, when main storage hierarchy support has been specified at system generation, in which hierarchy or hierarchies to allocate main storage. With main storage hierarchy support, storage hierarchies 0 and 1 are provided. If IBM 2361 Core Storage, Model 1 or 2, is present in the system, processor storage is referred to as hierarchy 0 and 2361 Core Storage is referred to as hierarchy 1. If 2361 Core Storage is not present, a two-part region is established in processor storage when regions are requested in two hierarchies. The two parts are not necessarily contiguous in processor storage.

Code the REGION parameter to specify how much storage is to be allocated in each hierarchy, or that all storage for the job step is to be allocated in a particular hierarchy. (If you do not code the REGION parameter on either the JOB or EXEC statement, the default region size, which is a PARM parameter field in the cataloged procedure for the input reader, is used and is always allocated in hierarchy 0. If you code the REGION parameter and request storage only from hierarchy 1, no hierarchy 0 segment will be allocated.) You can consult the Storage Estimates publication to help you determine how much main storage is required to process the job step. Then, depending on your reasons for using hierarchies, determine how much storage is required in each.

EXEC

If main storage hierarchy support was not specified at system generation and regions are requested in both hierarchies, the region sizes are combined and an attempt is made to allocate a single region from processor storage. If a region is requested entirely from hierarchy 1, an attempt is made to allocate the region from processor storage.

ACQUIRING ADDITIONIAL MAIN STORAGE

If the job step may require more main storage than has been allocated, you can code the ROLL parameter and request that the system try to provide you with additional main storage in that hierarchy. The ROLL parameter is described in the chapters "The ROLL Parameter" later in this section and in Section II.

WHEN YOU CALL A CATALOGED PROCEDURE

REGION parameter may be coded on the EXEC statement of a cataloged or in-stream procedure step. If the job step calls a cataloged procedure, you may want to override all REGION parameters in the procedure or only certain REGION parameters. To override all REGION parameters, code the REGION parameter on the EXEC statement that calls the procedure. Each procedure step will be allocated the same amount of storage in the specified hierarchies. To override only certain REGION parameters, code, on the EXEC statement that calls the procedure, REGION.procstepname for each procedure step you want to override. The requested region size will then be allocated in the specified hierarchies only to the named procedure step.

Examples of the REGION Parameter

1. //MART EXEC PGM=TYP, REGION= (80K, 30K)

Specifies that the system is to allocate 80 contiguous 1024-byte areas of storage in hierarchy 0 and 30 contiguous 1024-byte areas of storage in hierarchy 1. If main storage hierarchy support is not included in the system, the system will try to obtain 110 contiguous 1024-byte areas in processor storage.

2. // EXEC PGM=U1489, REGION=(98K)

Specifies that the system is to allocate 98 contiguous 1024-byte areas of storage in hierarchy 0.

3. //RAND EXEC PGM=SSYS, REGION=(100K, 50K), ROLL=(YES, YES)

The REGION parameter specifies that the system is to allocate 100 contiguous 1024-byte areas of storage in hierarchy 0 and 50 contiguous 1024-byte areas of storage in hierarchy 1. In the ROLL parameter, the first subparameter tells the system that this step may be rolled out if additional storage is required by another job; the second subparameter tells the system that it should try to provide this step with additional main storage if it is required.

4. //STP4 EXEC BILLING, REGION.PAID=(28K, 10K), REGION.LATE=(44K, 8K) named procedure steps (PAID and LATE).

Specifies that different region sizes are to be allocated to the named procedure steps (PAID and LATE).

The ROLL Parameter (For MVT)

ROLL=(x,y)

declares whether the job step may be rolled out. Code YES if the step may be rolled out; code NO if the step may not be rolled out.

declares whether the job step may cause rollout of another job step. Code YES if the step may cause rollout of another job step; code NO if the step may not cause rollout of another job step. YES must be coded if you want additional main storage allocated to the step when additional main storage is required.

Rules for Coding

- 1. If you code the ROLL parameter, both subparameters must be specified.
- If you have coded the ROLL parameter on the JOB statement, ROLL parameters coded on the job's EXEC statements are ignored.
- 3. Code ROLL=(NO,YES) or ROLL=(NO,NO) if this step is part of a teleprocessing job that uses the Auto Poll option. If you allow the step to be rolled out, the step cannot be restarted properly.
- 4. If the ROLL parameter is coded for MFT, the parameter is not used, but is checked for syntax.

When to Code the ROLL Parameter

The ROLL keyword parameter should be coded if the job step may require more main storage than was requested in the REGION parameter. When you specify in the ROLL parameter that this job step may cause rollout of another job step, an attempt is made to allocate additional storage if the step requires it. In order to allocate this additional space to a job step, another job step with a lower priority may have to be rolled out, i.e., temporarily transferred to secondary storage.

The ROLL parameter should also be coded when you want control over whether the job step can be rolled out because of another step's need for additional main storage. If the ROLL parameter is not coded, the specification made in the PARM parameter field in the cataloged procedure for the input reader is used.

WHEN YOU CALL A CATALOGED PROCEDURE

The ROLL parameter may be coded on the EXEC statement of a cataloged procedure step. If the job step calls a cataloged procedure, you may want to override all ROLL parameters in the procedure or only certain ROLL parameters. To override all ROLL parameters, code the ROLL parameter on the EXEC statement that calls the procedure. This establishes one rollout/rollin request for all the steps in the procedure. To override only certain ROLL parameters, code, on the EXEC statement that calls the procedure, ROLL procstepname for each procedure step that you want to override. The rollout/rollin request will then pertain only to the named procedure step.

Examples of the ROLL Parameter

1. //FILL EXEC PGM=PLUS, ROLL=(YES, YES), REGION=100K

Specifies that this step may be rolled out and may cause rollout of another job step if this step requires more than 100K of main storage.

2. //UP EXEC PGM=2165, ROLL=(NO, YES)

Specifies that this step may not be rolled out but may cause rollout of another job step.

3. //STP4 EXEC BILLING, ROLL.LATE=(YES, NO), ROLL.BILL=(NO, NO)

Specifies that different rollout/rollin requests pertain to each of the named procedure steps (LATE and BILL).

The TIME Parameter

TIME= (minutes, seconds)
1440

minutes

specifies the maximum number of minutes the job step can use the CPU. The number of minutes must be less than 1440 (24 hours).

seconds

specifies the maximum number of seconds beyond the specified number of minutes the job step can use the CPU, or, if no minutes are specified, the maximum number of seconds the job step can use the CPU. The number of seconds must be less than 60.

1440

specifies that the job step is not to be timed. Code 1440 if the step may require use of the CPU for 24 hours or more or if the step should be allowed to remain in a wait state for more than the established time limit.

Rules for Coding

- If the CPU time limit is given in minutes only, you need not code the parentheses.
- If the CPU time limit is given in seconds only, you must code a comma preceding the seconds to indicate the absence of minutes.
- 3. You must not code TIME=0 on an EXEC statement.

Specifying a Time Limit for a Job Step

The TIME keyword parameter can be used to specify the maximum amount of time the job step may use the CPU. (CPU time will appear on the output listing if system management facilities (SMF) or users accounting routines supply this information to the output data set.) By coding the TIME parameter, you can limit the CPU time wasted by a step that goes into a loop. Normally, a step that exceeds the specified time limit causes termination of the job. However, if the System Management Facilities option is included in the system and a user exit routine is provided, this routine can extend the time limit so that processing can continue. When the TIME parameter is not coded, a default time limit is assumed. The default is specified as a PARM parameter field in the cataloged procedure for the input reader.

TIME LIMIT FOR WAIT STATES

Since the job step can go into an extremely long wait state, the time a job step may remain in a wait state is limited. If the System Management Facilities option is included in the system, the installation determines this time limit. In this case, if the job step remains in a wait state for more than the established time limit, the job is terminated unless a user-provided exit routine extends the wait-state time limit for the step. If the System Management Facilities option is not included, the system automatically provides a 30-minute time limit for wait states; if the job step remains in a wait state for more than 30 consecutive minutes, the job is terminated.

How to Eliminate Timing

Certain applications require that a job use the CPU for 24 hours or more. In these cases you must eliminate job and step timing by coding TIME=1440. You should also code TIME=1440 if any of the job's steps should be allowed to remain in a wait state for more than the established time limit.

If your system includes the System Management Facilities (SMF) feature and you code TIME=1440, SMF termination messages will indicate that no CPU time was used; messages indicating the time the job step started and stopped will not, however, be affected.

HOW THE JOB TIME LIMIT AFFECTS THE STEP TIME LIMIT

The remaining job time may affect the amount of time the step can use the CPU. If the remaining CPU time for the job is less than the CPU time limit specified on the EXEC statement, the step can use the CPU only for the job's remaining CPU time. For example, if the job's remaining CPU time is 5 minutes and the step specifies a CPU time limit of 10 minutes, the step can only use the CPU for 5 minutes.

WHEN YOU CALL A CATALOGED PROCEDURE

The TIME parameter may be coded on the EXEC statement of a cataloged (or an in-stream) procedure step. If the job step calls a cataloged procedure, you may want to override all TIME parameters in the procedure or only certain TIME parameters. To override all TIME parameters, code the TIME parameter on the EXEC statement that calls the procedure. This applies a CPU time limit for the entire procedure, and nullifies any TIME parameters that appear on EXEC statements in the procedure. To override only certain TIME parameters, code, on the EXEC statement that calls the procedure, TIME.procstepname for each procedure step that you want to override. The CPU time limit will then pertain only to the named procedure step.

Reference

1. A discussion of the System Management Facilities option is contained in the <u>Introduction</u> publication. Information on user exit routines to be used with the System Management Facilities option is contained in the <u>System Management Facilities Guide</u>.

Examples of the TIME Parameter

1. //STEP1 EXEC PGM=GRYS,TIME=(12,10)

Specifies that the maximum amount of time the step can use the CPU is 12 minutes 10 seconds.

2. //FOUR EXEC PGM=JPLUS,TIME=(,30)

Specifies that the maximum amount of time the step can use the CPU is 30 seconds.

3. //INT EXEC PGM=CALC, TIME=5

Specifies that the maximum amount of time the step can use the CPU is 5 minutes.

4. //LONG EXEC PGM=INVANL,TIME=1440

Specifies that the job step is not to be timed. Therefore, the step may use the CPU and may remain in a wait state for an unspecified period of time.

5. //STP4 EXEC BILLING, TIME. PAID= (45, 30), TIME. BILL=(112, 59)

Specifies that different time limits pertain to each of the named procedure steps.

Section IV: The DD Statement

The DD (data definition) statement describes a data set that is to be used in a job step and specifies the input and output facilities required for use of the data set. Each data set to be used in a step requires a DD statement; all DD statements for a step follow that step's EXEC statement. Although all DD statement parameters are optional, a blank operand field is invalid, except when you are overriding DD statements that define concatenated data sets. (See "Overriding DD Statements that Define Concatenated Data Sets" in Appendix A of this publication.) You can include a maximum of 255 DD statements per job step.

DD Statement Format

//ddname DD operands comments

The DD statement consists of the characters //, in columns 1 and 2, and four fields - the name, operation (DD), operand, and comments field.

Rules for Coding

Follow the order listed below when coding the DD statement:

1. Code the characters // in columns 1 and 2.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80
1234567890	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0
11.		Livilia	Ligita	التنبالينيا			

2. Code a ddname, starting in column 3. (A ddname is not coded in two cases. These cases are described in the chapter "Assigning a Ddname.")

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80
1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1 2 3 4 5 6 7 8 9 0
(122)							1
[/DD1							احتصاحتنا

- Follow the ddname, or // if a ddname is not coded, with at least one blank.
- 4. Code DD.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80
1234567890	1234567890	1234567890	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0
1,1,0,0,1, ,0,0,						l carallar et	

- 5. Follow DD with at least one blank.
- 6. Code any desired positional parameter.

Code any desired keyword parameters. Separate each parameter with a comma.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80
1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1 2 3 4 5 6 7 8 9 0
1.1D.D.1 D.D. D	um.m.y.	Laraka					

- 8. Code at least one blank.
- 9. Code any desired comments.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80		
1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890		
1/DD4 DD DIUMMY. DS NAME=A. B. C. DIISP=04D.									
	UMMY, DSWAM	E-EALLOLO DI	SP = QZD						

Positional and Keyword Parameters

There are two types of parameters that can be coded on the DD statement:

<u>Positional parameters</u>, which must precede any keyword parameters. One of the following positional parameters may be coded on a DD statement:

DATA

DUMMY

DYNAM

These positional parameters are described in the following pages in the order listed above.

<u>Keyword parameters</u>, which may be coded in any order. The following keyword parameters can be coded on a DD statement:

AFF

DCB

DDNAME

DISP

DLM

DSN (see DSNAME)

DS NAME

FCB

LABEL

OUTLIM

QNAME - MFT and MVT with TCAM

SEP

SPACE

```
SPLIT
```

SUBALLOC

SYSOUT

TERM - MVT with TSO

UCS

UNIT

VOL (see VOLUME)

VOLUME

These keyword parameters are described, after the positional parameters, in the order listed above.

Sample DD Statements

- 1. //DDA DD DSNAME=&&TEMP, UNIT=2400, DISP=(NEW, PASS)
- 2. //PRINT DD SYSOUT=F
- 3. //IN DD DSNAME=ALLOC,DISP=(,KEEP,DELETE),UNIT=2311, X
 // VOLUME=SER=541382,SPACE=(CYL,(12,1))
- 4. //DWN DD *

Assigning a Ddname

//ddname DD

The ddname identifies a DD statement so that subsequent control statements and the data control block in the processing program can refer to it. The ddname must begin in column 3 and consist of 1 through 8 alphameric or national (3, #, \$) characters. The first character must be an alphabetic or national character.

Each ddname within a job step should be unique. If duplicate ddnames exist between successive EXEC statements within one job, allocation of devices and space and disposition processing are done for both DD statements; however, all references are directed to the first such DD statement in the step.

There are several special ddnames that tell the system that you want to make use of particular facilities. Except for the ddname SYSCHK, do not use the special ddnames unless you want these facilities. These special ddnames are individually discussed following "Examples of Valid Ddnames" in the section titled "Special Ddnames".

Apart from the restricted use of certain special ddnames, there are two instances when you should not code a ddname at all:

- 1. If a DD statement is to define a data set that is concatenated with a data set defined by a preceding DD statement.
- 2. If the DD statement is the second or third consecutive DD statement that defines an indexed sequential data set. (Defining an indexed sequential data set on more than one DD statement is discussed in "Appendix C: Creating and Retrieving Indexed Sequential Data Sets.")

WHEN ADDING OR OVERRIDING INFORMATION IN A CATALOGED PROCEDURE STEP

If the job step uses a cataloged or a in-stream procedure, DD statements that follow the EXEC statement are used (1) to override parameters on the various DD statements in the procedure, and (2) to add new DD statements to the procedure. These modifications exist only for the duration of the job step; they do not change the procedure permanently.

To make one of these modifications, each ddname must be qualified by a procedure step name, i.e., procstepname.ddname, as follows:

- To override parameters on a DD statement, code the name of the procedure step in which the DD statement appears, followed by a period, followed by the name of the DD statement that you want to override.
- To add DD statements to a procedure step, code the name of the procedure step in which you want to add the statement, followed by a period, followed by a ddname of your choosing.
- 3. To supply a procedure step with data in the input stream, code the name of the procedure step that is to use the data, followed by a ddname. This ddname may be predefined in the procedure step by means of the DDNAME parameter. In this case, the ddname that follows the procedure step name is the name coded in the DDNAME parameter. Otherwise, you code a ddname of your choosing.
- 4. To define data sets that are to be concatenated and added to the procedure step, identify the procedure step in which you want to add the statements, follow with a ddname of your choosing on the first DD statement, and omit the ddname on the second DD statement.

Examples of Valid Ddnames

- 1. //DD1 DD
- 2. //#5863 DD
- 3. //INPUT DD DD DD

Because the ddname is missing from the second DD statement, the data sets defined in these statements are concatenated.

4. //PAYROLL.DAY DD

If the procedure step named PAYROLL includes a DD statement named DAY, this statement overrides parameters on the statement named DAY. If the step does not include a DD statement named DAY, this statement is added to the procedure step for the duration of the job step.

5. //STEPSIX.DD4 DD DD

By identifying the procedure step in which you want to add statements (STEPSIX), followed by a ddname of your choosing (DD4), you can define data sets that are to be concatentated and added to the procedure step.

Special Ddnames

There are five special ddnames that tell the system you want to make use of a particular facility. The five ddnames and their functions are:

- JOBLIB this DD statement defines a private library that the system makes available for use by the job.
- STEPLIB this DD statement defines a private library that the system makes available for use by a job step.
- SYSABEND this DD statement defines a data set on which a dump can be written if the step abnormally terminates.

 The dump provided would include the system nucleus, the processing program storage area, and, possibly, a trace table.
- SYSUDUMP this DD statement defines a data set on which a dump can be written if the step abnormally terminates.

 The dump provided would include only the processing program storage area.
- SYSCHK this DD statement defines the checkpoint data set and is included when a deferred checkpoint restart is to occur.

JOBLIB

Unless the system is told that the program you request on the EXEC statement resides in a private or temporary library, the system expects to find it in the system library (SYS1.LINKLIB). One way to tell the system that a program resides in a private library is to follow the JOB statement with a DD statement named JOBLIB. (The other way to tell the system that a program resides in a private library is to include, as one of the DD statements for a job step, a DD statement named STEPLIB. The STEPLIB DD statement is described under the next topic, "STEPLIB.") If you include a JOBLIB DD statement, each time you request a program the system first looks in the private library; if the system does not find the program there, the system looks for it in the system library.

The parameters you code on the JOBLIB DD statement are determined by whether the library is cataloged. The parameters that must be coded when the library is cataloged and when the library is not cataloged are described under "When the Library Is Cataloged" and "When the Library Is Not Cataloged," respectively. In either case, how you code the DISP parameter is the same and is described in the topic "The DISP Parameter."

RULES FOR CODING THE JOBLIB DD STATEMENT

- 1. The ddname must be JOBLIB. Never use the ddname JOBLIB except when you are defining a private library.
- The JOBLIB DD statement must appear immediately after the JOB statement to which it pertains.
- 3. A JOBLIB DD statement cannot appear in a cataloged procedure.

The DISP Parameter

To make the private library available throughout the job, you must code the DISP parameter to specify the library's status and disposition. One of the following may be coded:

1. DISP=(OLD, PASS)

The library already exists and is kept at the end of the job. If you code DISP=OLD, the system assumes DISP=(OLD, PASS).

2. DISP=(SHR, PASS)

The library already exists and is kept at the end of the job. The library may be used by other jobs that are currently being executed, as long as all references to the library within the job also specify SHR. If you code DISP=SHR, the system assumes DISP=(SHR,PASS).

3. DISP=(NEW, PASS)

The library is created and used in the job, and is deleted at the end of the job.

4. DISP=(NEW, CATLG)

The library is created, cataloged, and used in the job, and is kept at the end of the job.

When the Library Is Cataloged

If the private library is cataloged, you must always code the DSNAME and DISP parameters.

- The DSNAME parameter specifies the name of the private library.
- The DISP parameter is either DISP=(OLD, PASS) or DISP=(SHR, PASS).

The other parameter you might code is DCB.

• Code the DCB parameter if complete data control block information is not contained in the data set label.

If you wish to refer to the private library in a later DD statement, code DSNAME=*.JOBLIB and the DISP parameter, DISP=(OLD, disposition). (Do not assign a disposition of DELETE, because the library would then be deleted at the end of the job step and be unavailable for use during the remainder of the job.) If a later DD statement defines a data set that is to be placed on the same volume as the private library, you can code VOLUME=REF=*.JOBLIB to obtain volume and unit information.

When the Library is Not Cataloged

If the private library is not cataloged, you must always code the DISP and UNIT parameters.

The DISP parameter is

DISP=(OLD, PASS), DISP=(SHR, PASS), DISP=(NEW, PASS), or DISP=(NEW, CATIG).

 The UNIT parameter specifies the device to be allocated to the library. You must always code the VOLUME parameter unless the status of the data set is NEW. The DSNAME parameter is required unless the data set has been assigned a disposition of (NEW, PASS). If the status of the data set is NEW, the SPACE parameter is required.

- The VOLUME parameter identifies the volume serial number.
- The DSNAME parameter specifies the name of the private library.
- The SPACE parameter allocates space for the library on the designated volume.

The other parameter you might code is DCB.

 Code the DCB parameter if complete data control block information is not contained in the data set label.

If you wish to refer to the private library in a later DD statement, code DSNAME=*.JOBLIB, VOLUME=REF=*.JOBLIB (or VOLUME=SER=serial number, UNIT=unit information), and the DISP parameter, DISP=(OLD, disposition). (Do not assign a disposition of DELETE, because the library would then be deleted at the end of the job step and be unavailable for use during the remainder of the job). If a later DD statement defines a data set that is to be placed on the same volume as the private library, you can code VOLUME=REF=*.JOBLIB to obtain volume and unit information.

Concatenating Libraries

You can arrange a sequence of DD statements that define different libraries. The libraries are searched in the order in which the DD statements appear. If the system library is not defined on one of these DD statements, it is searched last.

To concatenate libraries, omit the ddname from all the DD statements defining the libraries except the first DD statement. The first DD statement must specify a ddname of JOBLIB, and the entire group must appear immediately after the JOB statement.

When the Job Includes a STEPLIB DD Statement

If both JOBLIB and STEPLIB DD statements appear in a job, the STEPLIB definition has precedence, i.e., the private library defined by the JOBLIB DD statement is not searched for any step that contains the STEPLIB definition. If you want the JOBLIB definition ignored but the step does not require use of another private library, define the system library on the STEPLIB DD statement:

//STEPLIB DD DSNAME=SYS1.LINKLIB, DISP=SHR

Examples of the JOBLIB DD Statement

```
1. //PAYROLL JOB

//JOBLIB DD DSNAME=PRIVATE.LIB4, DISP=(OLD, PASS)

//STEP1 EXEC PGM=SCAN

//STEP2 EXEC PGM=UPDATE

//DD1 DD DSNAME=*.JOBLIB, DISP=(OLD, PASS)
```

The private library defined on the JOBLIB DD statement is cataloged. The statement named DD1 refers to the private library defined in the JOBLIB DD statement.

```
2. //PAYROLL JOB REGION=86K
//JOBLIB DD DSNAME=PRIV.DEPT58, DISP=(OLD, PASS), UNIT=2311,
// VOLUME=SER=D58 PVL
//STEP1 EXEC PGM=DAY
//STEP2 EXEC PGM=BENEFITS
//DD1 DD DSNAME=*.JOBLIB, VOLUME=REF=*.JOBLIB, DISP=(OLD, PASS)
```

The private library defined on the JOBLIB DD statement is not cataloged. The statement named DD1 refers to the private library defined in the JOBLIB DD statement.

```
3. //TYPE JOB MSGLEVEL=(1,1)

//JOBLIB DD DSNAME=GROUP8.LEVEL5, DISP=(NEW, CATLG), UNIT=2311, X

// VOLUME=SER=148562, SPACE=(CYL, (50,3,4))

//STEP1 EXEC PGM=DISC

//DDA DD DSNAME=GROUP8.LEVEL5 (RATE), DISP=OLD, X

VOL=REF=*.JOBLIB

//STEP2 EXEC PGM=RATE
```

The private library defined on the JOBLIB DD statement does not exist yet; therefore, all the parameters required to define the private library are included on the JOBLIB DD statement. The library is not created until STEP1 when a new member is defined for the library. The system looks for the program named DISC in the system library; the system looks for the program named RATE first in the private library.

```
4. //PAYROLL JOB
//JOBLIB DD DSNAME=KRG.LIB12,DISP=(OLD,PASS)
// DD DSNAME=GROUP31.TEST,DISP=(OLD,PASS)
// DD DSNAME=PGMSLIB,UNIT=2311, X
// DISP=(OLD,PASS),VOLUME=SER=34568
```

Several private libraries are concatenated. The system searches for each program in this order: KRG.LIB12, GROUP31.TEST, PGMSLIB, before searching SYS1.LINKLIB.

STEPLIB

Unless the system is told that the program requested on the EXEC statement resides in a private or temporary library, the system expects to find the program in the system library (SYS1.LINKLIB). One way to tell the system that the program the job step needs resides in a private library is to include, as one of the DD statements for that step, a DD statement named STEPLIB. (The other way to tell the system that a program resides in a private library is to follow the JOB statement with a DD statement named JOBLIB. The JOBLIB DD statement is described in the previous topic, "JOBLIB.") If you include a STEPLIB DD statement, each time a program is requested the system first looks in the private library for the program the job step uses; if the system does not find the program there, it looks for the program in the system library.

RULES FOR CODING THE STEPLIB DD STATEMENT

- 1. The ddname must be STEPLIB. Never use the ddname STEPLIB except when you are defining a private library.
- A STEPLIB DD statement can appear in any position among the DD statements for the step.
- 3. The library defined on a STEPLIB DD statement can be referred to by or passed to later job steps in the same job.

- 4. A STEPLIB DD statement can appear in a cataloged procedure.
- 5. The parameters you code on the STEPLIB DD statement are determined by whether the library is cataloged, not cataloged, or passed by a previous job step.

When the Library is Cataloged

If the private library is cataloged, you must always code the DSNAME and DISP parameters.

- The DSNAME parameter specifies the name of the private library.
- The DISP parameter specifies the library's status, either OLD or SHR, and its disposition. The disposition would be KEEP, UNCATLG, DELETE, or PASS, depending on how you want the library treated after its use in the job step.

The other parameter you might code is DCB.

 Code the DCB parameter if complete data control block information is not contained in the data set label.

When the Library Is Not Cataloged or Passed

If the private library is not cataloged or passed, you must always code the DSNAME, DISP, VOLUME, and UNIT parameters.

- The DSNAME parameter specifies the name of the private library.
- The DISP parameter specifies the library's status, either OLD or SHR, and its disposition. The disposition would be KEEP, CATLG, DELETE, or PASS, depending on how you want the library treated after its use in the job step.
- The VOLUME parameter identifies the volume serial number.
- The UNIT parameter specifies the device to be allocated to the library.

The other parameter you might code is DCB.

 Code the DCB parameter if complete data control block information is not contained in the data set label.

When the Library Is Passed By a Previous Step

If a private library has been assigned a disposition of PASS, a later job step can use the library when you code the DSNAME and DISP parameters on a STEPLIB DD statement.

- The DSNAME parameter specifies either the name of the private library or a backward reference of the form *.stepname.STEPLIB. If the STEPLIB DD statement that assigned a disposition of PASS occurs in a cataloged procedure, the backward reference must include the procedure step name, i.e., *.stepname.procstepname.STEPLIB.
- The DISP parameter specifies a status of OLD and a disposition. The disposition would be KEEP, CATLG, UNCATLG, DELETE, or PASS, depending on how you want the library treated after its use in the job step.

libraries. The libraries are searched in the order in which the DD statements appear. If the system library is not defined on one of these statements, it will be searched last for the program the job step uses.

To concatenate libraries, omit the ddname from all the DD statements defining the libraries except the first DD statement. The first DD statement must specify a ddname of STEPLIB, and the entire group appears as part of the DD statements for a particular step.

When the Job Includes a JOBLIB DD Statement

Concatenating Libraries

If both JOBLIB and STEPLIB DD statements appear in a job, the STEPLIB definition has precedence, i.e., the private library defined by the JOBLIB DD statement is not searched for any step that contains the STEPLIB definition. If you want the JOBLIB definition ignored but the step does not require use of another private library, define the system library on the STEPLIB DD statement:

//STEPLIB DD DSNAME=SYS1.LINKLIB, DISP=OLD

Examples of the STEPLIB DD Statement

1. //PAYROLL JOB EXEC LAB14 //STEP1 EXEC PGM=SPKCH //STEP 2 //STEPLIB DD DSNAME=PRIV.LIB5, DISP=(OLD, KEEP)

//STEP3 EXEC PGM=TIL80 //STEPLIB DD DSNAME=PRIV.LIB13, DISP=(OLD, KEEP)

The private libraries defined in STEP2 and STEP3 are cataloged.

2. //PAYROLL JOB DSNAME=LIB5.GROUP 4, DISP=(OLD, PASS) //JOBLIB DD //STEP1 EXEC PROC=SNZ12 EXEC PGM=SNAP10 //STEP2 DSNAME=LIBRARYP, DISP=(OLD, PASS), X //STEPLIB DD UNIT=2311, VOLUME=SER=55566 // EXEC PGM=A1530 //STEP3 //STEP4 EXEC PGM=SNAP11 //STEPLIB DD DSNAME=*.STEP2.STEPLIB, X DISP=(OLD, KEEP)

The private library defined in STEP2 is not cataloged. The STEPLIB DD statement in STEP4 refers to the library defined in STEP2. Since a JOBLIB DD statement is included, STEP1 and STEP3 could execute programs from LIB5.GROUP4 or, if not found there, from SYS1.LINKLIB. STEP2 and STEP4 could execute programs from LIBRARYP or SYS1. LINKLIB.

3. //PAYROLL JOB //JOBLIB DD DSNAME=LIB5.GROUP4, DISP=(OLD, PASS) EXEC PGM=SUM //STEP1 DSNAME=SYS1.LINKLIB, DISP=OLD //STEPLIB DD EXEC PGM=VARY //STEP2 EXEC PGM=CALC //STEP3 //STEPLIB DD DSNAME=PRIV.WORK, DISP=(OLD, PASS) DSNAME=LIBRARYA, DISP=(OLD, KEEP), X 11 // UNIT=2311, VOLUME=SER=44455 11 DD DSNAME=LIB.DEPT88, DISP=(OLD, KEEP) //STEP4 EXEC PGM=SHORE

STEP 2 and STEP4 can use programs contained in the private library named LIB5.GROUP4, which is defined in the JOELIB DD statement. STEP1 can use a program only from the system library, since the library defined on the STEPLIB DD statement is the system library and the JOELIB definition is ignored. A concatenation of private libraries is defined in STEP3. The system searches for the program named CALC in this order: PRIV.WORK, LIBRARYA, LIB.DEPT88, SYS1.LINKLIB. If a later job step refers to the STEPLIB DD statement in STEP3, the system will search for the program in the private library named PRIV.WORK, and if not found there, in SYS1.LINKLIB.

SYSABEND and SYSUDUMP

Each job step may contain one DD statement with a ddname of either SYSABEND or SYSUDUMP; if both are included, the last statement is used. These DD statements define a data set in which an abnormal termination dump can be written if the job step abnormally terminates. (Never use the ddname SYSABEND or SYSUDUMP unless you are defining a data set in which a dump can be written.) The dump provided when the SYSABEND DD statement is used includes the system nucleus, the processing program storage area, and a trace table, if the trace table option (MFT only) was requested at system generation. The SYSUDUMP DD statement provides only a dump of the processing program storage area.

The parameters you code on one of these statements are determined by whether you want the dump written to a unit record device or stored and written at a later time.

WRITING THE DUMP TO A UNIT RECORD DEVICE

If you want the dump written to a unit record device, you code either the UNIT or SYSOUT parameter.

- The UNIT parameter specifies the unit record device to which you want to write the dump, e.g., UNIT=1403.
- The SYSOUT parameter specifies the output class through which you want the data set routed, e.g., SYSOUT=A.

If the SYSOUT parameter is coded, the dump is not routed directly to a system output device. Instead, the dump is stored on a direct access device and later written on a system output device. If you want control over which direct access device the dump is stored on, you can include the UNIT parameter. You can also control the amount of space allocated to the dump by including the SPACE parameter. Otherwise, the system assigns a direct access device and space for a dump. (The device and space that the system assigns are specified as PARM parameter fields in the cataloged procedure for the input reader.) If you require a great deal of space for dumping, you should request enough space with the SPACE parameter rather than using the default; if there is not enough space, the system will not write the dump and will not issue a diagnostic message.

STORING THE DUMP

If you want to store the dump and write it at a later time, the DD statement must include the DSNAME, UNIT, VOLUME, and DISP parameters.

- The DSNAME parameter specifies the name of the data set.
- The UNIT parameter specifies the device to allocate to the data set.

- The VOLUME parameter identifies the volume serial number.
- The DISP parameter specifies the data set's status and disposition. Since you want to store the data set, the data set's disposition must be either KEEP, CATLG, or PASS.

If the dump is to be stored on a direct access device, you must code either the SPACE, SPLIT, or SUBALLOC parameter.

• The SPACE, SPLIT, or SUBALLOC parameter specifies the amount of space you want allocated to the data set. (Note: Excluding the requirements of the BSAM modules, the control program requires 2784 bytes of main storage within the partition of the failing task to provide dumps. Of the 2784 bytes 1344 are required for EOV processing should the initial space specifications for a direct access device be exceeded. This should be taken into consideration when making the specification on the SYSABEND or SYSUDUMP DD statements.)

Reference:

Refer to the <u>Programmer's Guide to Debugging</u> for information on how to interpret dumps.

Examples of the SYSABEND and SYSUDUMP DD Statements

1. //STEP2 EXEC PGM=A //SYSABEND DD SYSOUT=A

The SYSABEND DD statement specifies that you want the dump routed through the standard output class A.

2. //STEP3 EXEC PGM=B //SYSUDUMP DD SYSOUT=F, SPACE=(TRK, (0, 50)), UNIT=(2311,3)

The SYSUDUMP DD statement specifies that you want the dump routed through the output class F. The dump is temporarily stored on the specified device. If the UNIT and SPACE parameters were not coded, the system would assign a direct access device and an estimate of space required for the dump. In the SPACE parameter, zero tracks are requested for the primary quantity; therefore, no space is allocated unless the step abnormally terminates. If the step abnormally terminates, space for a dump is allocated using the secondary quantity. Requesting multiple units increases the likelihood that one of the volumes mounted on these devices contains enough space to allocate the secondary quantity.

3. //STEP1 EXEC PGM=PROGRAM1
//SYSABEND DD DS NAME=DUMP, UNIT=2311, DISP=("PASS"KEEP), X
VOLUME=SER=1234, SPACE=(TRK, (110,10))
//STEP 2 EXEC PGM=PROGRAM2
//SYSABEND DD DSNAME=*.STEP1.SYSABEND, DISP=(OLD, DELETE, KEEP)

The SYSABEND DD statements specify that you want the dump stored. The space request in STEP1 is large (110 tracks) so that the dumping operation is not inhibited due to insufficient space; if STEP1 does not abnormally terminate but STEP2 does, the dump will be written using the space allocated in STEP1. In both steps, a conditional disposition of KEEP is specified. This allows storing of the dump if either of the steps abnormally terminates. If both of the steps are successfully executed, the second term of the DISP parameter (DELETE) in STEP2 causes the data set to be deleted and the space acquired for dumping to be freed.

4.	//STEP1	EXEC	PG M=WWK	
	//SYSUDUMP	DD	DSNAME=DUMP, UNIT=2311, DISP=(,DELETE,	X
	11		KEEP), VOLUME=SER=54366, SPACE=(TRK, (80, 10))	
	//STEP2	EX EC	PGM=PRINT, COND=ONLY	
	//IN	DD	DSNAME=*.STEP1.SYSUDUMP, DISP=(OLD, DELETE),	X
	//		VOLUME=REF=*.STEP1.SYSUDUMP	

STEP1 specifies that the dump is to be stored if the step abnormally terminates. Because COND=ONLY is specified in STEP2, the step is executed only if STEP1 abnormally terminates. STEP2 uses a program that prints the dump.

SYSCHK

If CHKPT macro instructions were executed during the original execution of your processing program, checkpoint entries were written on a checkpoint data set. If you plan to resubmit your job for restart and execution is to be restarted at a particular checkpoint, you must include a DD statement named SYSCHK when you resubmit the job. The SYSCHK DD statement defines the data set on which the checkpoint entry was written.

RULES FOR CODING THE SYSCHK DD STATEMENT

- The ddname must be SYSCHK. SYSCHK can be used as the ddname of other DD statements in jobs.
- 2. The SYSCHK DD statement must immediately precede the first EXEC statement of the resubmitted job when restart is to begin at a checkpoint. (If the first EXEC statement is preceded by a DD statement named SYSCHK and restart is to begin at a step, the SYSCHK DD statement is ignored.)
- If a JOBLIB DD statement is included, the SYSCHK DD statement must follow it.
- 4. The RESTART parameter must be coded on the JOB statement; otherwise, the SYSCHK DD statement is ignored.
- 5. The parameters you code on the SYSCHK DD statement are determined by whether the checkpoint data set is cataloged.

When the Checkpoint Data Set Is Cataloged

If the checkpoint data set is cataloged, you must always code the DSNAME and DISP parameters.

- The DSNAME parameter specifies the name of the checkpoint data set.
- The DISP parameter must specify or imply a status OLD and a disposition of KEEP.

Other parameters you might code are VOLUME, UNIT, LABEL, and DCB.

• If the checkpoint entry exists on a tape volume other than the first volume of the checkpoint data set, you must indicate this by coding the volume serial number or volume sequence number in the VOLUME parameter. (The serial number of the volume on which a checkpoint entry was written is contained in the console message printed after the checkpoint entry is written.) If you code the volume serial number, you must also code the UNIT parameter, since the system will not look in the catalog for unit information.

- Code the LABEL parameter if the checkpoint data set does not have standard labels.
- Code DCB=TRTCH=C if the checkpoint data set is on 7-track magnetic tape with nonstandard labels or no labels.

When the Checkpoint Data Set Is Not Cataloged

If the checkpoint data set is not cataloged, you must always code the DSNAME, DISP, VOLUME, and UNIT parameters.

- The DSNAME parameter specifies the name of the checkpoint data set.
 If the checkpoint data set is partitioned, do not include a member name in the DSNAME parameter.
- The DISP parameter must specify or imply a status of OLD and disposition of KEEP.
- The VOIUME parameter specifies the volume serial number of the volume on which the checkpoint entry resides. (The serial number of the volume on which a checkpoint entry was written is contained in the console message printed after the checkpoint entry is written.)
- The UNIT parameter specifies the device to be allocated to the data set.

Other parameters you might code are LABEL and DCB.

- Code the LABEL parameter if the checkpoint data set does not have standard labels.
- Code DCB=TRTCH=C if the checkpoint data set is on 7-track magnetic tape with nonstandard or no labels.

Examples of the SYSCHK DD Statement

```
1. //JOB1 JOB RESTART=(STEP3,CK3)
//SYSCHK DD DSNAME=CHLIB,UNIT=2311, X
// DISP=OLD,VOLUME=SER=456789
//STEP1 EXEC
```

The checkpoint data set defined on the SYSCHK DD statement is not cataloged.

```
2. //JOB2 JOB RESTART=(STEP2, NOTE2)

//JOBLIB DD DSNAME=PRIV.LIB3, DISP=(OLD, PASS)

//SYSCHK DD DSNAME=CHECKPTS, DISP=(OLD, KEEP), X

// UNIT=2400, VOLUME=SER=438291

//STEP1 EXEC
```

The checkpoint data set defined on the SYSCHK DD statement is not cataloged. Note that the SYSCHK DD statement follows the JOBLIB DD statement.

```
3. //JOB3 JOB RESTART=(*,CHECK4)
//SYSCHK DD DSNAME=CHKPTLIB,DISP=OLD,
// LABEL=(,NSL),DCB=(TRTCH=C)
//STEP1 EXEC
```

The checkpoint data set defined on the SYSCHK DD statement is cataloged and has nonstandard labels.

The * Parameter

//ddname DD *

specifies that the data following this statement is to be entered through the input stream for use by a processing program.

Rules for Coding

- 1. You may code more than one DD * statement per job step.
- When you call a cataloged or in-stream procedure, you may add more than one DD * statement to a procedure step.
- If the data is preceded by a DD * statement, a delimiter statement following the data is optional.
- 4. Only the keywords DLM and DIAGNS and the DCB subparameters BLKSIZE and BUFNO can be coded on the DD * statement. Any other parameters coded on a DD * statement are flagged as errors and the job fails.
- 5. A cataloged or in-stream procedure cannot contain a DD * statement.
- 6. Code the DATA parameter instead of the * parameter when the data contains job control statements.

Defining Data in the Input Stream

The input stream can be on a card reader, a magnetic tape, or a direct access device.

If the EXEC statement for the job step specifies a program name, you can include the data for the job step in the input stream. If the EXEC statement for the job step calls a cataloged or in-stream procedure, you can include the data for each procedure step in the input stream.

If the processing program does not read all the data in an input stream, the remaining data is flushed without causing abnormal termination of the job.

You can include several distinct groups of data in the input stream for a job step or procedure step. The system will recognize each group of data if you precede each group with a DD * statement, or follow each group with a delimiter statement, or both. If you code the DLM parameter on the DD * statement, you must terminate the data with the value assigned in the DLM parameter. If you do not code the DLM parameter, the delimiter is /* and is not required. If you leave out the DD * statement for a group of data, the system provides a DD * statement having SYSIN as its ddname.

The following rules apply when data is entered through an input stream:

- The input stream can be on any device supported by QSAM.
- The characters in the records must be coded in BCD or EBCDIC.

If you require some other mode of processing, such as column binary mode (DCB=MODE=C), arrange with your installation to provide your program

with a card reader at the time your job step executes. Then request the use of the card reader by a DD statement specifying UNIT and DCB information and provide the operators with the cards to be read under the special processing mode.

 $\underline{\text{Note}}$: When the automatic SYSIN batching reader is used to read the input stream, a DD * statement does not appear in the output listing. Instead, an identically named DD statement describing the temporary data set created from the input data appears.

The DCB Subparameters BLKSIZE, BUFNO, and DIAGNS

The input reader procedure causes data in the input stream to be written onto a direct access device so that the data can be retrieved rapidly when it is required by a processing program. As the data is written onto the direct access device, the data may be blocked. The block size and number of buffers used for blocking the data is established in the input reader procedure assigned to read the input stream. If you want shorter blocks than would be the case if the block size in the input reader procedure were assumed, you can specify the desired block size. (You cannot request larger blocks.)

To specify the desired block size, code DCB=BLKSIZE=blocksize on the DD * statement. To decrease the number of buffers, include the DCB subparameter BUFNO, e.g., DCB=(BLKSIZE=80,BUFNO=1). (When a job is submitted via remote job entry and the DCB subparameter BUFNO is coded on a DD * statement, BUFNO is ignored.)

BLKSIZE, BUFNO, and DIAGNS may be coded on a DD statement that contains the DDNAME parameter, which refers to another DD statement. (You cannot use a backward reference to a previously-defined DD statement to obtain these DCB subparameters; they must be coded explicitly on the DD statement that contains the DDNAME parameter.) If, in turn, the referenced DD statement defines data in the input stream, the BLKSIZE and BUFNO DCB subparameters are used to block the data. However, if the referenced DD statement contains its own DCB subparameters BLKSIZE and BUFNO, these values override those on the DD statement that contains the DDNAME parameter.

Examples of the * Parameter

```
1. //INPUT1 DD *

data

.
/*
//INPUT2 DD *,DLM=HD

data
.
.
HD
```

The DLM parameter on the DD statement named INPUT2 defines of delimiter HD. This delimiter is used in place of /* to terminal the data defined in the input stream by INPUT2.

2. //STEP2 EXEC PROC=FRESH
//SETUP.WORK DD UNIT=2400, LABEL=(,NSL)

//SETUP.INPUT1 DD *

data

/*
//PRINT.FRM DD UNIT=180
//PRINT.INP DD *

data
...

/*

/*

The input data defined by the DD statement named SETUP.INPUT1 is for use by the cataloged procedure step named SETUP; the input defined by the DD statement named PRINT.INP is for use by the cataloged procedure step named PRINT.

3. //INPUT2 DD *,DCB=(BLKSIZE=1600,BUFNO=2,DIAGNS=TRACE)

data
.

The DCB subparameters BLKSIZE and BUFNO override those specified in the input reader procedure. The DCB subparameter DIAGNS requests the OPEN/CLOSE/EOV trace option.

The DATA Parameter

//ddname DD DATA

DATA

specifies that the data following this statement is to be entered through the input stream for use by a processing program. This data contains job control statements (i.e., these statements have the characters // in columns 1 and 2.)

Rules for Coding

- 1. The data cannot contain statements with /* (or the delimiter you assigned in the DLM parameter) in columns 1 and 2.
- 2. You may code more than one DD DATA statement per job step.
- When you call a cataloged or in-stream procedure, you may add more than one DD DATA statement to a procedure step.
- 4. Each group of data must be preceded by a DD DATA statement and followed by a delimiter statement (/*).
- 5. Only the keywords DLM and DIAGNS and the DCB subparameters BLKSIZE and BUFNO can be coded on the DD DATA statement. Any other parameters coded on a DD DATA statement are flagged as errors and the job fails.
- 6. A cataloged or in-stream procedure cannot contain a DD DATA statement.
- 7. The * parameter may be coded instead of the DATA parameter when the data does not contain job control statements.

Defining Data in the Input Stream

The input stream can be on a card reader, a magnetic tape, or a direct access device.

If the EXEC statement for the job step specifies a program name, you can include the data for the job step in the input stream. If the EXEC statement for the job step calls a cataloged or in-stream procedure, you can include the data for each procedure step in the input stream.

If the processing program does not read all the data in an input stream, the remaining data is flushed without causing abnormal termination of the job.

You can include several distinct groups of data in the input stream for a job step or procedure step. The system will recognize each group of data if you precede each group with a DD DATA statement and follow each group with a delimiter statement. If you code the DLM parameter on the DD DATA statement, the delimiter terminating the group of data is the value assigned in the DLM parameter. Otherwise, the delimiter is /*.

The following rules apply when data is entered through an input stream:

- The input stream can be on any device supported by QSAM.
- The characters in the records must be coded in BCD or EBCDIC.

If you require some other mode of processing, such as column binary mode (DCB=MODE=C), arrange with your installation to provide your program with a card reader at the time your job step executes. Then request the use of the card reader by a DD statement specifying UNIT and DCB information:

//name DD UNIT=2540-R,DCB=(MODE=C,BLKSIZE=160)

and provide the operations staff with the deck of cards to be read under the special processing mode.

Note: When the automatic SYSIN batching reader is used to read the input stream, a DD DATA statement does not appear in the output listing. Instead, an identically named DD statement describing the temporary data set created from the input data appears.

The DCB Subparameters BLKSIZE, BUFNO, and DIAGNS

The input reader procedure causes data in the input stream to be written onto a direct access device so that the data can be retrieved rapidly when it is required by a processing program. As the data is written onto the direct access device, the data may be blocked. The block size and number of buffers used for blocking the data is established in the input reader procedure assigned to read the input stream. If you want shorter blocks than would be the case if the block size in the input reader procedure were assumed, you can specify the desired block size. (You cannot request larger blocks.)

To specify the desired block size, code DCB=BLKSIZE=blocksize on the DD DATA statement. To decrease the number of buffers, include the DCB subparameter BUFNO, e.g., DCB=(BLKSIZE=80,BUFNO=1). (When a job is submitted via remote job entry and the DCB subparameter BUFNO is coded on a DD DATA statement, BUFNO is ignored.)

BLKSIZE, BUFNO, and DIAGNS may be coded on a DD statement that contains the DDNAME parameter, which refers to another DD statement. If, in turn, the referenced DD statement defines data in the input stream, the BLKSIZE and BUFNO DCB subparameters are used to block the data. However, if the referenced DD statement contains its own DCB subparameters BLKSIZE and BUFNO, these values override those on the DD statement that contains the DDNAME parameter.

The ASB reader can not process the DDNAME parameter for in-stream procedures. For ASB in-stream procedures, code your DCB subparameter on the DD * or DD DATA card if you want shorter blocks than the assured blocksize in the ASB procedure.

Examples of the DATA Parameter

1. //INPUT1 DD DATA, DLM=AD, DCB=DIAGNS=TRACE

data

ΑD

Defining data in the input stream. The DLM parameter defines a delimiter, AD. This delimiter is used in place of /* to terminate the data defined in the input stream. The DCB subparameter DIAGNS requests the OPEN/CLOSE/EOV trace option.

```
//STEP 2
                 EXEC PROC=UPDATE
//PREP. DD4
                      DS NAME=A.B.C, VOLUME=SER=D88, UNIT=2311,
                                                                        X
                      SPACE=(TRK, (10,5)), DISP=(,CATLG,DELETE)
//PREP.INPUT
                 DD
                      DATA
               data
/*
//ADD.DD6
                 DD
                      SPACE = (TRK, (5,1))
//ADD. IN
                 DD
               data
```

Defining data in the input stream. The input defined by the DD statement named PREP.INPUT is for use by the cataloged procedure step named PREP. This data contains job control statements. The input defined by the DD statement named ADD.IN is for use by the cataloged procedure step named ADD. Since this data is defined by a DD * statement, it must not contain job control statements.

```
3. //INPUT2 DD DATA, DCB=(BLKSIZE=400, BUFNO=1)

data

/*
//INPUT3 DD DATA

data

data

...
/*
```

/*

Defining several groups of data in the input stream. The DCB subparameters coded on the DD statement named INPUT2 are used to block the data that follows that statement.

The DUMMY Parameter

//ddname DD DUMMY

DUMMY

specifies that no device or external storage space is to be allocated to the data set, no disposition processing is to be performed on the data set, and, for BSAM and QSAM, specifies that no input or output operations are to be performed on the data set.

Rules for Coding

- You can code the DUMMY parameter by itself or follow it with all of the parameters, except the DDNAME parameter, necessary to define a data set. DUMMY and DDNAME are mutually exclusive.
- 2. If the DUMMY parameter is coded and an access method other than the basic sequential access method (BSAM) or queued sequential access method (QSAM) is requested to read or write the data set, or if the DUMMY parameter is coded and the access method of BDAM load mode (BSAM with DCB MACRF=WL) is requested, a programming error occurs.
- Data sets concatenated to a DUMMY data set will also be treated as DUMMY data sets by the system.

What the DUMMY Parameter Does

When you use either the basic sequential or queued sequential access method, the DUMMY parameter allows your processing program to execute without performing input or output operations on a data set. When the processing program asks to write a dummy data set, the write request is recognized, but no data is transmitted. When the processing program asks to read a dummy data set, an end-of-data-set exit is taken immediately.

Besides bypassing input or output operations on a data set, the DUMMY parameter causes the UNIT, VOLUME, SPACE, and DISP parameters, when coded on the DD DUMMY statement, to be ignored (if coded, these parameters are checked for syntax). Therefore, no devices or external storage space is allocated to the data set and no disposition processing is performed on the data set.

If you know that certain parts of a program "work" and need not be processed each time the job is submitted for testing, the DUMMY parameter can help save time. The DUMMY parameter can also be used to suppress the writing of data sets, such as output listings, that you do not need.

Coding the DUMMY Parameter

You can code the DUMMY parameter by itself or follow it with all the parameters you would normally code when defining a data set. However, in one case you must code another parameter after the DUMMY parameter: when certain DCB information, not supplied in the DCB macro instruction, is required for the processing program to execute successfully. For example, when an OPEN routine requires a BLKSIZE specification to obtain buffers, and BLKSIZE is not specified in the DCB macro instruction, you should supply this information by coding the DCB parameter after the DUMMY parameter. When a DD statement that overrides a procedure DD statement contains the DUMMY parameter, the system will ignore all the parameters coded on the procedure DD statement except for the DCB parameter.

DD

When you want input or output operations performed on the data set, replace the DD statement that contains the DUMMY parameter with a DD statement that contains all of the parameters required to define this data set. When a procedure DD statement contains the DUMMY parameter, you can nullify it by coding the DSNAME parameter on the overriding DD statement. However, be sure the data set name is not NULLFILE. Assigning the name NULLFILE in the DSNAME parameter has the same effect as coding DUMMY.

If you code DUMMY on a DD statement and a later DD statement in the same job refers to this DD statement when requesting unit affinity (UNIT=AFF=ddname) or volume affinity (VOLUME=REF=*.stepname.ddname), the data set defined on the later DD statement is assigned a dummy status.

Examples of the DUMMY Parameter

1. //OUTPUT3 DD DUMMY, DSNAME=X.Y.Z, UNIT=2311,
// SPACE=(TRK,(10,2)), DISP=(,CATLG)

This DD statement defines a dummy data set. The parameters coded with the DUMMY parameter are not used.

2. //IN DD DUMMY, DCB=(BLKSIZE=800, LRECL=400, RECFM=FB)

This DD statement defines a dummy data set. The DCB parameter is coded to supply information for the data control block that was not supplied in the DCB macro instruction.

 If you are calling a cataloged procedure that contains the following DD statement in STEP4

//IN DD DUMMY, DSNAME=ELLN, DISP=OLD, VOL=SER=11257, UNIT=2314

you can nullify the effects of the DUMMY parameter by coding:

//STEP4.IN DD DSNAME=ELLN

4. If you are calling a cataloged procedure that contains the following DD statement in STEP1

//TAB DD DSNAME=APP. LEV12, DISP=OLD

you can make this DD statement define a dummy data set by coding:

//STEP1.TAB DD DUMMY

If you are calling a cataloged procedure that contains the following DD statement in a procedure step named LOCK

//MSGS DD SYSOUT=A

you can make this DD statement define a dummy data set by coding:

//LOCK.MSGS DD DUMMY

The DYNAM Parameter

//ddname DD DYNAM

DYNAM

used in the TSO LOGON procedure to specify that dynamic allocation of data sets is to be used. This allows you to defer definition of a data set until you require it. If DYNAM is used in the background (batch environment), it means the same as DUMMY.

Rules for Coding

- The dynamic allocation meaning of DYNAM is only effective for foreground jobs using an MVT system with TSO. For MFT, or MVT without TSO, DYNAM has the same meaning as coding DUMMY. Like DUMMY, DYNAM is a positional parameter.
- 2. No other parameters may be coded with the DYNAM parameter.
- 3. The DDNAME parameter cannot be used to refer to a DYNAM DD statement.

What the DYNAM Parameter Does

During LOGON processing for TSO, no devices or external storage are allocated to a data set defined by a DD DYNAM statement. The DYNAM parameter reserves space in internal tables so that data set requirements that arise during the terminal session may be satisfied. When you require a data set, the actual device and external storage for the data set can then be allocated.

When DYNAM is used in the background (batch environment) or in the foreground before allocation, it has the same effect as coding DUMMY. Refer to the section on the DUMMY parameter in this book for more information.

Coding the DYNAM Parameter

DYNAM is a positional parameter. However, no other parameters may be coded with DYNAM.

To nullify the DYNAM parameter in a cataloged procedure, code the SYSOUT or DSNAME parameter in the overriding DD statement, but do not use the DSNAME of NULLFILE.

Example of the DYNAM Parameter

1. //INPUT DD DYNAM

For TSO, this statement specifies dynamic allocation may be requested. For background jobs, DYNAM has the same meaning as DUMMY.

The AFF Parameter

AFF=ddname

ddname

the name of an earlier DD statement in the same job step that requests processing of a data set on a separate channel from the one on which certain other data sets are being processed.

Rules for Coding

- The DD statement that the AFF parameter refers to must contain the SEP parameter.
- 2. If channel separation is critical, use the UNIT parameter to specify a particular channel, using an absolute unit address or group name. (How to specify a particular channel is described in the chapter "The UNIT Parameter.")
- 3. The AFF, SEP, DDNAME, and SYSOUT parameters are mutually exclusive parameters; therefore, when SEP, DDNAME, or SYSOUT is coded, do not code the AFF parameter.

OPTIMIZING CHANNEL USAGE

The devices that the system allocates for data sets used in a job step are attached to channels. These channels transmit the data in the data sets from the device to the CPU. When two or more data sets are to be used in a job step, processing time may be shortened if the system transmits data over separate channels.

Requesting Channel Separation

The SEP and AFF parameters can be used to request channel separation. You list in the SEP parameter the names of up to eight earlier DD statements that define data sets from which channel separation is desired. (The SEP parameter is described in the chapter "The SEP Parameter" which appears later in this section.) Coding the AFF parameter is a shortcut method of requesting channel separation, since you list only one ddname and that ddname refers to an earlier DD statement in the same job step that contains the SEP parameter. The AFF parameter tells the system that you want the data set defined on this DD statement to have the same channel separation as the data set defined on the named DD statement. The AFF parameter does not tell the system that these two data sets are to be assigned to the same channel -- the system will decide that based on what devices are available for allocation.

If the system finds it impossible in the current environment to satisfy the channel separation request, the system may try to alter the current environment through some operator action. The operator is given the option of bringing a device online, cancelling the channel separation request, or cancelling the job. In certain environments, the operator may also be able to tell the system to wait for devices to become free. If you make a nonspecific request for a direct access volume and request channel separation, your request for separation may be ignored. This happens when the algorithm used to allocate data sets to devices is not able to select the device that would permit the desired channel separation.

Requests for channel separation are ignored for any data sets that have been allocated devices by the automatic volume recognition (AVR) option.

If it is essential that data be transmitted via a particular channel, you can specify an absolute unit address or group name (if the group of devices is associated with one channel) in the UNIT parameter.

If neither the SEP nor AFF parameter is coded, any available channel, consistent with the UNIT parameter requirement, is assigned by the system.

Example of the AFF Parameter

```
1. //STEP1 EXEC PGM=CONVERT

//INPUT1 DD DSNAME=A.B.C,DISP=OLD

//INPUT2 DD DSNAME=FILE,DISP=OLD,UNIT=2400, X

// VOLUME=SER=54333

//BUF DD UNIT=2400,SEP=(INPUT1,INPUT2)

//OUTPUT DD DSNAME=ALPHA,UNIT=TAPE,DISP=(,KEEP),AFF=BUF
```

The system attempts to assign the data sets defined by the DD statements BUF and OUTPUT to a channel other than the ones assigned to the data sets defined by the DD statements INPUT1 and INPUT2. The data sets defined by the DD statements BUF and OUTPUT may or may not be assigned to the same channel. The parameter SEP=(INPUT1, INPUT2) could have been coded instead of AFF=BUF.

The DCB Parameter

```
DCB=(list of attributes)
DCB=(
      /dsname
                                               [.list of attributes])
       *.ddname
       *.stepname.ddname
       *.stepname.procstepname.ddname
```

list of attributes

those DCB keyword subparameters that describe the data set and are needed to complete the data control block. DCB keyword subparameters are listed in this chapter under "Glossary of DCB Subparameters."

dsname

specifies that the system is to copy DCB information from the data set label of a cataloged data set named "dsname." The cataloged data set must reside on a direct access volume and the volume must be mounted before execution of the job step. Specifying DCB=dsname is permitted only when DISP=OLD.

*.ddname

specifies that the system is to copy DCB information from an earlier DD statement in the same job step named "ddname."

*.stepname.ddname

specifies that the system is to copy DCB information from a DD statement named "ddname," which appears in an earlier job step named "stepname."

*.stepname.procstepname.ddname

specifies that the system is to copy DCB information from a DD statement named "ddname," which appears in a procedure step named "procstepname"; the procedure step is part of a cataloged or in-stream procedure that was called by an earlier jobstep named "stepname.

Rules for Coding

- 1. Separate each DCB keyword subparameter with a comma.
- If the DCB parameter value consists of only one keyword subparameter, a data set name, or a backward reference, you need not enclose it in parentheses.
- Only the DCB subparameters BLKSIZE, BUFNO and DIAGNS have meaning when coded with the DDNAME parameter. Do not code other DCB subparameters with the DDNAME parameter.

Completing the Data Control Block

Each data set that is to be read or written must have a data control block associated with it. The data control block is originally constructed in the processing program by a DCB macro instruction. This data control block can be completed when the DCB macro instruction is coded or at execution time through the DCB parameter on the DD statement and the data set label, if one exists.

When more than one source is used to complete the data control block, a merging process takes place (see Figure 9): first, information coded with the DCB macro instruction is placed in the data control block; then, information coded on the DD statement is placed in unfilled sections of the data control block; and, finally, information in the data set label, if one exists, is placed in still unfilled sections of the data control block. (DCB information may also be provided by default options assumed in the OPEN macro instruction and by your program, either before the data set is opened, by using the DCBD macro instruction, or in the DCB exit routine. Refer to the Data Management Macro Instructions publication.)

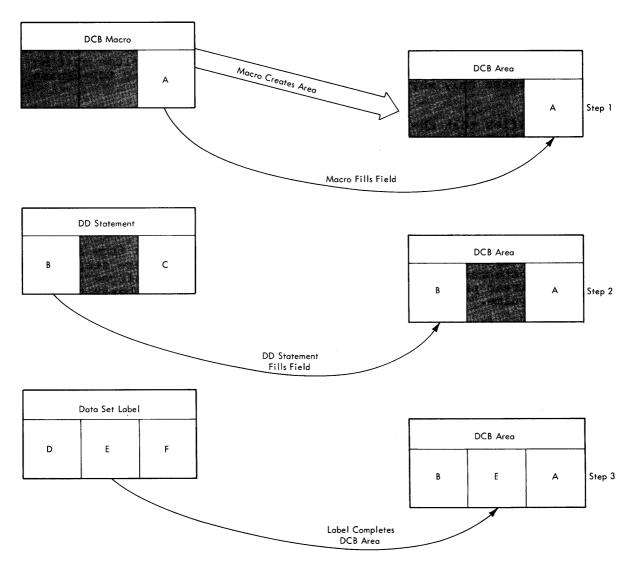


Figure 9. How the Data Control Block Is Filled

DCB Macro Instruction

The DCB macro instruction includes information about the data that is unlikely to change each time the processing program is executed. Also, it includes any information that is not related to the DCB parameter and the data set label (e.g., MACRF, DDNAME, EXIST).

DCB Parameter

The DCB parameter is coded on the DD statement and includes all the information that is not specified by any other source. How to specify DCB information on the DD statement is described in "Specifying DCB Information on the DD Statement."

Data Set Label

If the data set already exists and has standard labels, certain information is contained in the label that can be used to complete the data control block. For tape, the data set label can contain the data set's record format, block size, logical record length, tape recording density, and, for seven-track tape, tape recording technique. For direct access, the data set label can contain the data set's organization, record format, block size, logical record length, and if the data contains keys, the key length and relative key position.

Specifying DCB Information on the DD Statement

The DCB parameter must be coded on the DD statement unless the data control block is completed by other sources. There are several ways of specifying DCB information on the DD statement. You can:

- Supply all pertinent DCB keyword subparameters on the DD statement.
- Tell the system to copy DCB information from the data set label of an existing cataloged data set.
- Tell the system to copy DCB information from an earlier DD statement in the same job.

(Note: If a data set is old and data attributes are now specified which are variations of the first attributes, the old attributes will be ignored. You can override DCB attributes only on a DD statement contained in a cataloged or in-stream procedure, as discussed in Appendix A: Cataloged and In-Stream Procedures.)

SUPPLYING DCB KEYWORD SUBPARAMETERS

The DCB information required to complete the data control block can be listed as keyword subparameters in the DCB parameter; subparameters are separated by commas. If the processing program and the DCB parameter supply the same subparameter, the subparameter on the DD statement is ignored. Valid DCB keyword subparameters and the values that can be assigned to them are listed in this chapter under "Glossary of DCB Subparameters."

COPYING DCB INFORMATION FROM A DATA SET LABEL

To save time in coding the DCB parameter, you can tell the system to copy the DCB information from the data set label of a cataloged data set on a currently mounted direct access volume. The data set must have standard labels. A permanently resident volume is the most likely place from which to copy such information because it is always mounted. Code in the DCB parameter the data set name of the cataloged data set. The name you code cannot contain special characters, except for periods used in a qualified name.

The following DCB keyword subparameters can be copied from the data set label: DSORG, RECFM, OPTCD, BLKSIZE, LRECL, KEYLEN, and RKP. The volume sequence number and expiration date of the cataloged data set are also copied unless you specify these in the DD statement. If you code

any DCB keyword subparameters following the name of the cataloged data set, these subparameters override any of the corresponding subparameters that were copied. Valid DCB keyword subparameters and the values that can be assigned to them are listed in this chapter under "Glossary of DCB Subparameters."

COPYING DCB INFORMATION FROM AN EARLIER DD STATEMENT

Another way to save time in coding the DCB parameter is to tell the system to copy the DCB information from an earlier DD statement in the same job. The earlier DD statement can be contained in the same job step, an earlier job step or cataloged procedure step. If you code any DCB keyword subparameters following the reference to the DD statement, these subparameters override any of the corresponding subparameters that were copied. If the DD statement defines an existing data set and contains the DCB parameter, the system copies those subparameters from the earlier DD statement that were not previously specified for the existing data set. Valid DCB keyword subparameters and the values that can be assigned to them are listed below.

Glossary of DCB Subparameters

This glossary lists the keyword subparameters that you can code in the DCB parameter on a DD statement, their definitions, and the values that can be assigned to them. Across from each subparameter is a list of the access methods that use the subparameter.

Certain required subparameters cannot be coded in the DCB parameter, but must be coded in the DCB instruction. These subparameters are described in the <u>Data Management Macro Instructions</u> publication.

 $\mathbf{BFALN} = \left\{ \begin{array}{l} \mathbf{F} \\ \mathbf{D} \end{array} \right\}$

Can be used with BDAM, BISAM, BPAM, BSAM, EXCP, QISAM, QSAM

Specifies the boundary alignment of each buffer as follows:

- F -- each buffer starts on a fullword boundary that is not also a doubleword boundary.
- D -- each buffer starts on a doubleword boundary.

If not specifed by any source, doubleword boundary alignment (D) is assumed. (Specifying BFALN=F in a DD statement causes fragmentation of main storage if the DCB is closed before releasing buffers.)

Note for QISAM: Buffer alignment information must be supplied from the same source as the type of buffering (BFTEK) information or both must be omitted.

 $\begin{cases}
\mathbf{S} \\
\mathbf{E} \\
\mathbf{D}
\end{cases}$

Can be used with EXCP, QSAM, BTAM

Specifies the type of buffering to be used by the control program as follows:

For EXCP:

- S -- simple buffering.
- E -- exchange buffering.

For QSAM:

- S -- simple buffering.
- E -- exchange buffering (track overflow cannot be specified in the RECFM subparameter). Exchange buffering cannot be used with variable-length blocked or spanned records.
- A -- record area buffering. In the locate mode with variable-length spanned records, the control program reads and writes entire logical records rather than segments.

If neither is specified by any source, simple buffering (S) is assumed.

Note for QSAM: The type of buffering information must be supplied from the same source as the boundary alignment (BFALN) information or both must be omitted.

For BTAM:

D -- dynamic buffering. If dynamic buffering is specified, a buffer pool must be defined.

For BDAM or BSAM:

R -- record buffering. For writing records in the create BDAM mode, this specification allows a logical record to span one or more tracks. For reading a data set, segments without keys are offset in the buffer by the key length. This means that the actual data starts in the same place in the buffer by the key length. This means that the actual data starts in the same place in the buffer for each read.

BLKSIZE=block size

Can be used with BDAM, BPAM, BSAM, QISAM (output only), QSAM, TCAN

For BDAM, BPAM, BSAM, QISAM, QSAM:

Specifies the maximum length, in bytes, of a block. The maximum length that can be specified is 32,760. For blocks of ASCII records on magnetic tape, the maximum length is 2048 and the minimum length is 18.

- If RECFM=F, then BLKSIZE must be ≥ logical record length.
- If RECFM=FB, then BLKSIZE must be an integral multiple of the logical record length.
- If RECFM=V, then BLKSIZE must be ≥ (logical record length + 4).
- If RECFM=VB, then BLKSIZE must be (n times logical record length) + 4; where n is the average number of logical records in the block rounded to the next highest number.

 If RECFM=D or DB, then BLKSIZE must be ≥ (maximum record length + block prefix length).

Note for QISAM: The block size that is specified must be at least 10 bytes less than the number of data bytes available on one track of the allocated direct access device. Key length can be included in the block size, but only as a part of the record length (LRECL). Do not separately add the key length to the block size. Block size information is necessary when creating a data set.

Note for BDAM, BPAM, BSAM, QSAM: If you code the BLKSIZE subparameter in the DCB macro instruction or on a DD statement that defines an existing data set and the data set has standard labels, the subparameter overrides the block size specified in the label.

Note for BDAM, BPAM, BSAM with keys: If direct-access device keys are used, do not include the key length in the block size. Specify key length in the KEYLEN subparameter of the DCB parameter.

Note for BSAM and OSAM with RECFM=FB: If the BLKSIZE subparameter on a DD statement for a SYSOUT data set (an output data set being routed through the output stream) is not an integral multiple of and larger than the logical record length (LRECL), the block size will be adjusted to the nearest lower multiple of the logical record length (LRECL).

Note for TCAM: TCAM specifies the length in bytes of the application program's work area into which TCAM will move message units to be processed. The number specified should be at least equal to the record length as specified by the LRECL operand and must not exceed 32,760. If OPTCD=W is specified, eight bytes must be included for the source of the message. If OPTCD=C is specified, one byte must be included to indicate the message segment. For variable length records, four bytes must be included for unblocked records or eight bytes for blocked records.

BUFIN=number of buffers Can be used with TCAM

Specifies the number of buffers to be assigned initially for receiving operations for each line in the line group. The number specified must be less than the number of buffers in the buffer pool for this line group and may not exceed 15. The number of buffers specified in the combined BUFIN and BUFOUT operands must be no greater than the number of buffers in the buffer pool for this line group (not including those for disk activity only). If This operand is omitted, 1 is assumed.

BUFL=buffer length Can be used with BDAM, BISAM, BPAM, BSAM, EXCP, QISAM, QSAM, TCAM

For BDAM, BISAM, BPAM, BSAM, EXCP, QISAM, QSAM:

Specifies the length, in bytes, of each buffer in the buffer pool. The maximum length is 32,760 bytes. Requirements for supplying buffer length information vary with the different data organization and access methods as follows:

BDAM -- required only if dynamic buffering is specified in the MACRF subparameter of the DCB macro instruction.

BPAM, BSAM, and QSAM -- optional. If omitted and the control program acquires buffers automatically, the sum of the block size (BLKSIZE) and key length (KEYLEN) is used to establish buffer length. If card image is specified (MODE=C), BUFL=160 must be specified.

BISAM and QISAM -- not required if the control program acquires buffers automatically or if dynamic buffering is specified. (For BISAM, dynamic buffering is specified in the MACRF subparameter of the DCB macro instruction).

Note: TCAM specifies the length in bytes of each of the Message Control Program buffers that handle messages received and sent by an application program. The length must be at least 31 bytes but may not exceed 65,535 bytes.

Specifies the maximum number of buffers to be allocated to a line at one time. The number specified must be greater than 1 but may not exceed 15 and must be at least equal to the larger of the numbers specified by BUFIN and BUFOUT. If this operand is omitted, 2 is assumed.

BUFNO=number of buffers

Can be used with BDAM, BISAM, BPAM, BSAM, BTAM, EXCP, QISAM, QSAM

Specifies the number of buffers to be assigned to the data control block; the maximum number is 255, but the actual number allowed may be less than 255 because of limits established when the system was generated. Requirements for coding the BUFNO subparameter are as follows:

Method of Obtaining the Buffer Pool

BUILD macro instruction (BDAM, BISAM, BPAM, QISAM, QSAM)
GET POOL macro instruction (BDAM, BISAM, BPAM, BSAM, QISAM, QSAM)

Automatically (BPAM and BSAM)

Automatically (QISAM and QSAM)

Dynamic buffering (BDAM and BISAM)

Requirement for Indicating Number of Buffers

Must be specified.

Control program uses the number specified in the GETPOOL macro instruction.

Must be specified.

Optional; if not specified, two buffers are obtained.

Optional; if not specified, two buffers are obtained.

 $BUFOFF =
\begin{cases}
n \\
L
\end{cases}$ Can be used with BSAM, QSAM

Specifies the buffer offset. The buffer offset is the length of an optional block prefix that may precede a block of one or more ASCII records on magnetic tape.

- n -- the length of the block prefix. For input, n may be any unsigned decimal number from 0 through 99. For output, n can only be 0.
- L -- the block prefix field is four bytes long and contains the block length. L may be specified only when record format (RECFM) is D.

specifies the number of buffers to be assigned initially for sending operations for each line in the line group. The number specified must be less than the number of buffers in the buffer pool for this line group and may not exceed 15. The number of buffers specified in the combined BUFIN and BUFOUT operands must be no greater than the number of buffers in the buffer pool for this line group (not including those for disk activity only). If this operand is omitted, 2 is assumed.

Specifies the number of buffers to be requested in advance for the GET macro instruction. The maximum number is 255. If not specified by any source or if a value of less than 2 is specified, 2 is assumed. For information on calculating BUFRQ, refer to the publication IBM System/360 Operating System: Telecommunications Access Method Message Control, GC30-2005.

BUFSIZE=number

Can be used with TCAM

Specifies the length in bytes of each of the buffers to be used for all lines in a particular line group. This length must be at least 31 bytes, but may not exceed 65,535. The buffer size should be an even multiple of the buffer-unit size as specified in the INTRO macro; the maximum number of buffer-units per buffer is 255.

Can be used with BSAM, EXCP, QSAM

Specifies the paper tape code in which the data is punched.

A -- USASCII (8 track).

B -- Burroughs (7 track).

C -- National Cash Register (8 track).

F -- Friden (8 track).

I -- IBM BCD perforated tape and transmission code (8 track).

N -- No conversion required.

T -- Teletype (5 track).

If not specified by any source, I is assumed. The subparameters CODE, KEYLEN, MODE, PRTSP, STACK, and TRTCH are mutually exclusive subparameters. Therefore, if CODE is coded, do not code any of these other subparameters.

 $\begin{array}{ll}
\mathsf{CPRI} = & \left\{ \begin{matrix} \mathsf{R} \\ \mathsf{E} \end{matrix} \right\} \\
\mathsf{S}
\end{array}$

Can be used with QTAM

Specifies the relative priority to be given to sending and receiving operations, as follows:

- R -- receiving has priority over sending. An output message is sent on a given line only during a polling interval.
- E -- receiving and sending have equal priority. After each full polling sequence on a given line, all output messages queued for that line are transmitted.

S -- sending has priority over receiving. For nonswitched lines after QTAM polls a terminal on a line, the line is made available for outgoing messages, and the next terminal is polled only when there are no output messages in the queue for the line. For Auto Poll lines, the line is made available for outgoing messages after a message ending in EOT is received by a terminal on the line, or when the end of the polling list is reached. S must be specified for IBM 2740 Communications Terminals Types I and VI, and if the line group includes IBM 2740 Model 2 terminals.

If this subparameter is not specified by any source, CPRI=S is assumed.

This subparameter must be omitted if this line group consists of switched lines.

For WTTA Lines:

R or E -- output messages are sent when there is no traffic over the line, after an EOT character has been received, or after a time-out has occurred.

S -- output messages are sent when there is no traffic over the line, after an EOT or EOM character has been received, or after a time-out has occurred.

CYLOFL=number

Can be used with QISAM (output only)

Specifies the number of tracks on each cylinder to hold the records that overflow from other tracks on that cylinder. The maximum number is 99.

DEN=

$$\left\{ egin{array}{c} 0 \\ 1 \\ 2 \\ 3 \end{array} \right\}$$

Can be used with BSAM, EXCP, QSAM

Specifies the magnetic tape density in number of bits-per-inch used to write a data set, as follows:

DEN	7-Track Tape	9-Track Tape	9-Track Tape (Phase Encoded)	9-Track Tape Dual Density
0	200			
1	556			
2	800	800		800(NRZI)
3			1600	1600 (PE)

NRZI is for non-return-to-zero-inverse mode. PE is for phase encoded mode.

Note: Specifying DEN=0 for a 7-track 3420 will result in a 556 bits-per-inch recording density, but corresponding messages and tape labels will indicate a 200 bits-per-inch recording density.

If not specified by any source, 800 bits-per-inch is assumed for 7-track tape, 800 bits-per-inch for 9-track without dual density, and 1600 bits-per-inch for 9-track with dual density or phase-encoded drives.

For 7-track tape, all information on the reel must be written in the same density (i.e., labels, data, tapemarks). Do not specify DEN for a SYSOUT data set.

Requests the Open, Close/EOV trace option which gives a module by module trace of Open/Close/EOV's workarea and the user's DCB.

If the subparameter is not specified on the DD card, the option is not implemented. The Generalized Trace Facility must be active in the system while the job that requested the trace is running.

DSORG=data set organization Can be used with BDAM, BISAM, BPAM, BSAM, BTAM, EXCP, GAM, QISAM, QSAM, QTAM

Specifies the organization of the data set and whether the data set contains any location-dependent information that would make the data set unmovable (U). The values that can be used are as follows:

- DA -- Direct access
- DAU -- Direct access unmovable
- CQ -- Direct access message queue or the checkpoint for a message control program. If this subparameter is not specified by any source, the telecommunications job, when executed, is terminated.
- CX -- Communications line group
- GS -- Graphic data control block
- IS -- Indexed sequential
- ISU -- Indexed sequential unmovable
- MQ -- Data control block governing message transfer to or from a telecommunications message processing queue. If this subparameter is not specified by any source, the telecommunications job, when executed, is terminated.
- PO -- Partitioned organization
- POU -- Partitioned organization unmovable
- PS -- Physical sequential
- PSU -- Physical sequential unmovable

The values used with each access method are listed below.

DSORG must always be coded in the DCB macro instruction, and, with certain access methods, must be coded on the DD statement.

BDAM -- DA or DAU (PS or PSU when creating the data set). The DSORG subparameter must be coded on the DD statement that defines the data set. When creating the data set, the DSORG subparameter must be coded as DA or DAU on the DD statement that defines the data set and PS or PSU in the DCB macro instruction.

BISAM -- IS; must be coded on the DD statement.

BPAM -- PO or POU

BSAM -- PS or PSU

BTAM -- CX

EXCP --PS, PO, DA, or IS

GAM --

QISAM --IS or ISU (ISU can be specified only when creating the data set). The DSORG subparameter must be coded on the DD statement that defines the data set.

QSAM --PS or PSU

QTAM --MQ, CQ, or CX

EROPT= Can be used with QSAM (ACC) SKP

Specifies the option to be executed if an error occurs in writing or reading a record, as follows:

ACC --Accept the block causing the error.

Skip the block causing the error (implies RELSE). SKP --

ABE --Cause abnormal end of task.

If the subparameter is not specified by any source, ABE is assumed.

FUNC=function

Can be used with BSAM, QSAM

Specifies the type of data set to be opened for the 3525 Card Read-Punch-Print, as follows:

I - interpret punch data set

R - read P - punch

W - print

D - data protection for a punch data set

X - printer

T - two-line printer

The only valid combinations of these values are:

I	WT	R W X	PWXT
R	WXT	RWT	RPW
P	RP	RWXT	RPWX
W	RPD	PW	RPWXT
WX	₽₩	PWX	RPWD

If this information is not supplied by any source, the system assumes P.

Note that D, X, and T cannot be coded alone. If you specify D, the data protection image (DCI) must be stored in SYS1.IMAGELIB and you must code the image-identifier for the data protection image in the FCB parameter. For more detailed information, see the publication OS Data Management Services, GC26-3746.

Specifies the maximum number of input/output macro instructions that will be issued before a WAIT macro instruction. The value of GNCP must be from 1 to 99 at execution time. If the value of GNCP is not specified by any source, a value of 1 is assumed. The subparameters GNCP, BFTEK, BFALN, and HIARCHY are mutually exclusive subparameters. Therefore, if GNCP is coded, do not code any of these other subparameters. For additional information on the GNCP subparameter, refer to the publication IBM System/360 Operating System: Graphic Programming Services for IBM 2250 Display Unit, GC27-6909.

 $HIARCHY = \{0\}$

Can be used with BDAM, BISAM, BPAM, BSAM, EXCP, QISAM, QSAM

Specifies the storage hierarchy in which the buffer pool is to be formed as follows:

0 -- forms the pool from available space in processor storage.

1 -- forms the pool from available space in IBM 2361 Core Storage.

If the HIARCHY subparameter is not specified by any source, and if a hierarchy designation is not supplied by the GETPOOL macro instruction, hierarchy 0 is assumed.

The buffer pool is formed in the user partition or region within the indicated hierarchy. If space is unavailable within the hierarchy specified, the task is abnormally terminated.

INTVL=number

Can be used with QTAM

Specifies the polling interval (i.e., the number of seconds of intentional delay between passes through a polling list) for the lines in this line group. After all the terminals in a polling list for a given line have been polled (beginning to end), a delay equal to the number of seconds specified in this subparameter occurs before polling is restarted at the beginning of the list. The number specified must not be greater than 255.

If this subparameter is not specified by any source, INTVL=0 is assumed. This subparameter must be omitted if the line group consists of switched lines, WTTA lines, or if the Auto Poll feature is used.

KEYLEN=number

Can be used with BDAM, BPAM, BSAM, EXCP, QISAM (output only)

Specifies the length, in bytes, of the keys used in the data set. Except for QISAM, the keys are associated with blocks on direct access devices; the keys for indexed sequential data sets are associated with records. The maximum key length is always 255 bytes.

The subparameters KEYLEN, CODE, MODE, PRTSP, STACK, and TRTCH are mutually exclusive subparameters. Therefore, if KEYLEN is coded, do not code any of these other subparameters.

Note for BDAM: If standard labels are used, the key length information can be supplied from the data set label for an existing data set. If a key length is not supplied by any source, no input or output requests that require a key may be issued.

Note for BPAM and BSAM: If standard labels are used, the key length information can be supplied from the data set label for an existing data set. If a key length is not supplied by any source before the

Macro instruction is issued, a length of zero (no keys) is assumed.

Note for QISAM: For an existing data set with standard labels, the key length can only be supplied from the data set label.

LIMCT=number

Can be used with BDAM

Specifies the number of blocks, if relative block addressing is used, or the number of tracks, if relative track addressing is used, that are to be searched for a block or available space when the extended search option (OPTCD=E) is specified. The number may equal or exceed the number of blocks or tracks in the data set, in which case the entire data set is searched.

If the extended search option is not specified, the LIMCT subparameter is ignored.

LRECL=number

Can be used with BPAM, BSAM, QISAM (output only), QSAM, TCAM

Specifies the actual or maximum length, in bytes, of a logical record. The record length is required for fixed-length and variable-length records; for variable-length records, the maximum record length should be specified. The length cannot exceed the block size (BLKSIZE) value except for variable-length spanned records.

- If RECFM=V or VB, then LRECL must be equal to the maximum record length +4.
- If RECFM=F or FB, then LRECL must be equal to the logical record length.
- If RECFM=U, then LRECL should be omitted.
- If RECFM=D or DB, then LRECL must be equal to the maximum record length +4.

Note for BPAM: The record length is required for fixed-length records only.

Note for BSAM: The record length can be omitted from all sources, in which case the block size specification (BLKSIZE) is used. For variable-length spanned records (VS or VBS) processed under BSAM, if logical record exceeds 32,756, specify LRECL=X. For ASCII records on magnetic tape, the maximum record length is 2048 bytes and the minimum record length is 18 bytes.

Note for QISAM: For unblocked records, with a relative key position (RKP) of zero, the record length includes only the data portion of the record. The record length can be specified only when creating the data set.

Note for QSAM: For variable-length spanned records (VS or VBS) processed under QSAM (locate mode), if logical record exceeds 32,756, specify LRECL=X. For ASCII records on magnetic tape, the maximum record length is 2048 bytes and the minimum record length is 18 bytes.

Note for TCAM: The record length should include the source and control bytes if these are specified by the OPTCD suboperands. The record length is required for fixed-length records only.

 $\begin{array}{ccc}
\mathsf{MODE} & \left\{ \begin{matrix} \mathsf{C} & \left[\begin{matrix} \mathsf{O} \\ \mathsf{R} \end{matrix} \right] \\ \mathsf{E} & \left[\begin{matrix} \mathsf{O} \\ \mathsf{R} \end{matrix} \right] \end{matrix} \right\}
\end{array}$

Can be used with BSAM, EXCP, QSAM

Specifies the mode of operation to be used with a card reader, a card punch, a card read-punch, or a card read-punch-print, as follows:

C - card image (column binary) mode

E - EBCDIC mode

O - optical mark read mode

R - read column eliminate mode

Note: Do not code the MODE subparameter for data entered through the input stream.

If this information is not supplied by any source, the system assumes E.

If you specify 0 or R, the system assumes that the first card of the data set is the format descriptor. For more information on the format descriptor, refer to the publication OS Data

Management Services, GC26-3746.

The DCB subparameters MODE, CODE, KEYLEN, PRTSP, and TRTCH are mutually exclusive. Therefore, if you code MODE, do not code any of these other subparameters.

NCP=number

Can be used with BISAM, BPAM, BSAM

Specifies the maximum number of READ or WRITE macro instructions issued before a CHECK macro instruction is issued. The maximum number allowed is based on limits established when the system was generated. If chained scheduling is used, NCP must be specified as more than 1.

If not specified by any source, 1 is assumed.

NTM=number

Can be used with QISAM

Specifies the number of tracks to be used for a cylinder index. When the specified number of tracks has been filled, a master index is created. This information is required only when the master index option (OPTCD=M) is selected.

If not specified by any source and OPTCD=M is specified, the master index option is ignored.

OPTCD=

A B C E F H I L M O Q R T U W Y Z

Can be used with BDAM, BPAM,

BSAM, EXCP, QISAM (output only), QSAM, TCAM

Specifies the optional services to be performed by the control program. All optional services must be requested by the same source. The characters may be coded in any order and, when used in combination, no commas are permitted between characters.

- A -- Actual device addresses are to be presented ("block address" operand) in READ and WRITE macro instructions. For BDAM, R requests the same option as A, and either can be coded.
- B -- Requests that end-of-file recognition be disregarded for tapes. This is to prevent premature end-of-file indication for multi-volume input data sets on tape when such tapes have end-of-file labels on volumes before the last volume.
- C -- For BPAM, BSAM, QSAM: requests that chained scheduling be used.
 - For TCAM: specifies that one byte of the work area be used to indicate if a segment of a message is the first, intermediate, or last segment.
- E -- An extended search (more than one track) is to be performed for a block or available space. (The LIMCT subparameter must also be specified; otherwise, this option is ignored.)
- F -- Feedback may be requested in READ and WRITE macro instructions and the device address returned is to be of the form presented to the control program.
- H -- For Optical Readers (BSAM): requests hopper empty exit.
 - For DOS Tape Input Files (BSAM and QSAM): requests the system to check for and bypass any DOS checkpoint records found on the tape.
- I -- Requests that the control program use the independent overflow areas for overflow records.
- L -- Requests that the control program delete records that have a first byte of all ones; records so marked may be deleted when space is required for new records. Do not specify this option for blocked records if RKP=0.
- M -- Requests that master indexes be created as required, according to the information in the NTM subparameter. This option is ignored if the subparameter NTM=number is not specified.
- O -- Requests online correction for Optical Readers (QSAM).
- Q -- Specifies that translation from ASCII input to EBCDIC is required or that translation from EBCDIC to ASCII output is required. If the subparameter AL or AUL is coded in the LABEL parameter of the DD statement, the OPTCD subparameter will be treated as if Q was specified.
- R -- For BDAM, actual device addresses are to be presented ("block address" operand) in READ and WRITE macro instructions.
 - For QISAM, requests the control program to place reorganization criteria information in the RORG1, RORG2, and RORG3 fields of the data control block. This option is provided whenever the OPTCD subparameter is omitted from all sources.
- T -- Requests user totaling facility.
- U -- For BSAM, QSAM: Only for 1403 printers with the Universal Character Set feature. Unblocks data checks and allows analysis by an appropriate error analysis (SYNAD) routine. If U is omitted, data checks are blocked (not recognized as errors).

When coding OPTCD=U, specify a printer in your program. Do not use the SYSOUT parameter unless the operator specifies a direct system output (DSO) writer.

For ISAM: specifies the full track index write feature.

For TCAM: specifies that the work unit to be handled is a message. If U is omitted, the work unit is assumed to be a record.

W -- For BDAM, BPAM, BSAM, QSAM: Requests a validity check for write operations on direct access devices. If the device is a 2321 data cell, validity checking is always performed whether requested or not.

For TCAM: Specifies that the name of each message source is to be placed in an eight-byte field in the work area.

- Y -- Requests that the control program use the cylinder overflow areas for overflow records.
- Z -- For input from a magnetic tape: Requests the control program to shorten its normal error recovery procedure. When Z is specified, a data check is considered permanent after five unsuccessful attempts to read a record. This option is available only if selected at system generation. It should be used only when a tape is known to be faulty and there is no need to process every record. The error analysis (SYNAD) routine should keep a count of the number of permanent errors, and should terminate processing if the number becomes excessive.

For input from a direct access storage device (DASD): Specifies search direct (SD) for sequential data sets.

Only certain options can be selected with each access method, as follows:

For BDAM:

A or R E F W

For BPAM:

C W WC

For BSAM and QSAM:

B C H Q T U W Z UC WC ZC

For EXCP:

Z

For QISAM:

ILMRUWY

For BISAM:

L

For QSAM only:

0

For BSAM only:

Н

For TCAM:

C U W

PCI=(
$$\begin{bmatrix} N \\ R \\ A \end{bmatrix} \begin{bmatrix} I, N \\ I, R \end{bmatrix}$$
) Can be used with TCAM

specifies if and how a program-controlled interruption (PCI) is to be used to control the allocating and freeing of buffers. The suboperands apply to receiving and sending operations respectively.

- N -- specifies that no PCIs are taken during filling (on receiving operations) or emptying (on sending operations) of buffers.

 Buffers are freed at the end of transmission.
- R -- specifies that after the first buffer is filled (on receiving operations) or emptied (on sending operations), a PCI occurs during the filling or emptying of each succeeding buffer. The completed buffer is freed, but no new buffer is allocated to take its place.
- A -- specifies that after the first buffer is filled (on receiving operations) or emptied (on sending operations), a PCI occurs during the filling or emptying of the next buffer. The first buffer is freed. A buffer is allocated in place of the freed buffer.

If this operand is not specified by any source, PCI=(A,A) is assumed.

PRTS P=
$$\begin{cases} 0 \\ 1 \\ 2 \\ 3 \end{cases}$$
 Can be used with BSAM, EXCP, QSAM

Specifies the line spacing on a printer as 0, 1, 2, or 3 lines between printout. This subparameter is valid only if control characters are not present (A or M is not specified in the RECFM subparameter).

If not supplied by any source, 1 is assumed.

The subparameters PRTSP, CODE, KEYLEN, MODE, STACK, and TRTCH are mutually exclusive subparameters. Therefore, if PRTSP is coded, do not code any of these other subparameters.

Specifies the format and characteristics of the records in the data set. The format and characteristics must be completely described by one source.

If this subparameter is omitted, an undefined-length record is assumed with no optional features provided, except for QISAM where variable-length records are assumed, and QTAM where a message segment is assumed.

Both the record format and characteristics are specified using the characters defined below. The allowable combinations of characters are indicated for the associated access methods; for increased efficiency, the characters should be coded in the order shown. However, alphabetical order is not required.

Character Definitions

- A The record contains ASA printer control characters.
- B The records are blocked.
- D The ASCII records are of variable length. Each record on magnetic tape has a four-byte record descriptor field giving the record length in decimal.
- F The records are of fixed length.
- G The message data provided in the work unit is a complete message.
- M The records contain machine code control characters.
- R The message data provided in the work unit is a complete record.
- S For fixed-length records, the records are written as standard blocks, i.e., no truncated blocks or unfilled tracks within the data set, with the exception of the last block or track.

For variable-length records, a record may span more than one block. Exchange buffering (BFTEK=E) cannot be specified.

- The records may be written onto overflow tracks if required. Exchange buffering (BFTEK=E) or chained scheduling (OPTCD=C) should not be used because they will be ignored.
- U The records are of undefined length.
- V The records are of variable length. (Variable length records cannot be in ASCII.)

Only certain characters and combinations of characters can be selected with each access method. The allowable combinations of characters are indicated for the associated access methods; for increased efficiency, the characters should be coded in the order shown.

For BDAM:

For BSAM and QSAM:

For BSAM and QSAM using ASCII data sets on tape:

 $\underline{\mathtt{Note}} \colon \mathtt{A}$ or \mathtt{M} cannot be specified if the PRTSP subparameter is specified.

For QISAM:

For QTAM:

$$\left\{ egin{array}{c} \mathbf{G} \\ \mathbf{R} \\ \mathbf{S} \end{array} \right\}$$

For TCAM:

$$\begin{pmatrix} \mathbf{0} \\ \mathbf{v} \\ \mathbf{F} \end{pmatrix} [\mathbf{B}]$$

RESERVE=(number1, number2) Can be used with TCAM

specifies the number of bytes (from 0 to 255) to be reserved in a buffer for insertion of data by the DATETIME and SEQUENCE macros. number1 indicates that space is to be reserved in the first buffer of each incoming message; number2, that space is to be reserved in all buffers except the first. If RESERVE is not coded, no space is reserved.

RKP=number

Can be used with QISAM (output only)

Specifies the position of the first byte of the record key, relative to the beginning of each record. (The beginning byte of a record is addressed as 0.)

If RKP=0 is specified for blocked fixed-length records, the key begins in the first byte of each record, and the delete option (OPTCD=L) must not be specified. If RKP=0 is specified for unblocked fixed-length records, the key is not written in the data field; the delete option can be specified.

For variable-length records, the relative key position must be 4 or greater, when the delete option (OPTCD=L) is not specified. The relative key position must be 5 or greater if the delete option is specified.

If this information is not specified by any source, a relative key position of zero is assumed.

SOWA=number

Can be used with QTAM

Specifies the size, in bytes, of the user-provided input work areas. The value must be less than 32,768 and must include the 4-byte user prefix.

If this subparameter is not specified by any source, the telecommunications job, when executed, is terminated.

STACK= {1

Can be used with BSAM, EXCP, QSAM

Specifies the stacker bin to receive the card, and is either 1 or 2.

If not specified by any source, 1 is assumed.

The subparameters STACK, CODE, KEYLEN, PRTSP, and TRTCH are mutually exclusive subparameters. Therefore, if STACK is coded, do not code any of these other subparameters.

THRESH=number

Can be used with TCAM

specifies the percentage of the nonreusable disk message queue records to be used before a flush closedown occurs. If this operand is omitted, closedown occurs when 95% of the records have been used.

 $\begin{array}{ccc} \textbf{TRTCH=} & \left\{ \begin{matrix} \textbf{C} \\ \textbf{E} \\ \textbf{T} \\ \textbf{ET} \end{matrix} \right\} & \text{Can} \end{array}$

Can be used with BSAM, EXCP, QSAM

Specifies the recording technique for seven-track tape. (This parameter is only to be used with seven track tape.)

- C Data conversion feature is to be used, with odd parity and no translation.
- E Even parity, with no translation and no conversion.
- T Odd parity and no conversion, and BCD to EBCDIC translation is required when reading; EBCDIC to BCD translation when writing.
- ET Even parity and no conversion, and BCD to EBCDIC translation is required when reading; EBCDIC to BCD translation when writing.

If this subparameter is not specified by any source, odd parity and no translation or data conversion is assumed.

The subparameters TRTCH, CODE, KEYLEN, MODE, PRTSP, and STACK are mutually exclusive subparameters. Therefore, if TRTCH is coded, do not code any of these other subparameters.

Examples of the DCB Parameter

1. //DD1 DD DSNAME=ALP,DISP=(,KEEP),VOLUME=SER=44321, X
// UNIT=2400,DCB=(RECFM=FB,LRECL=240,BLKSIZE=960, X
// DEN=1,TRTCH=C)

This DD statement defines a new data set and contains the information necessary to complete the data control block.

2. //DD2 DD DSNAME=BAL, DISP=OLD, DCB=(RECFM=F, LRECL=80, X BLKSIZE=80)
//DD3 DD DSNAME=CNANN, DISP=(, CATLG, DELETE), UNIT=2400, X LABEL=(,NL), VOLUME=SER=663488, DCB=*.DD2

The statement named DD3 defines a new data set and requests the system to copy the DCB subparameters from the DD statement named DD2, which is in the same job step.

3. //DD4 DD DSNAME=JST,DISP=(NEW,KEEP),UNIT=2311, X
// SPACE=(CYL,(12,2)),DCB=(A.B.C,KEYLEN=8)

This DD statement defines a new data set and requests the system to copy DCB information from the data set label of the cataloged data set named A.B.C. If the data set label contains a key length specification, it is overridden since KEYLEN is coded on the DD statement.

This DD statement defines an existing data set and requests the system to copy the DCB subparameters from the DD statement named DD8, which is contained in the procedure step named PROCSTP5. The cataloged procedure was called by the job step named STEP1. If any of the DCB subparameters coded on the procedure DD statement have been previously defined for this data set, they are ignored. If the BUFNO subparameter has not been previously specified for the data set, then five buffers are assigned to the data control block.

DCB Subparameter	ALGOL	Assembler		COBOL E	COBOL F	ANS COBOL 3	FORTRAN E	FORTRAN G & H	PL/I F
BFALN=		F or D	1,2					_	
BFTEK=		S or E (QSAM only)	1,2						
BLKSIZE=	number of bytes	number of bytes	1		number of bytes 1	number of bytes	number of bytes	number of bytes	number of bytes
BUFL=		number of bytes	1						
BUFNO=		number of buffers	1	number of buffers	number of buffers	number of buffers	1 or <u>2</u>	1 or <u>2</u>	number of buffe
DIAGNS=	TRACE	TRACE		TRACE	TRACE	TRACE	TRACE	TRACE	TRACE
EROPT=		ABE	1	<u>ABE</u>	<u>ABE</u>	ABE			
FUNC=		any of possible combinations	4	any of possible combinations	any of possible combinations				
HIARCHY=		0 or 1	L						
LRECL=	number of bytes	number of bytes	1				number of bytes	number of bytes	number of byte
MODE=		C[R] or E[R]	1	C [R] or E [R]	C[R] or E[R]	C [R] or E [R]	C[R] or E[R]	C [R] or E [R]	C[R] or E[R]
NCP=		number of channel programs (BSAM only)						
OPTCD=		[c]	1	[c]	[c]	[c]	[c]	[c]	[c]
RECFM=	[A][A]	U A or B S A or B S B S A M	1				U[A] or F[B][A]	UA or FEBA	UA or M S S S BS A F S BS A
STACK=		1 or 2	1	<u>1</u> or 2	1 or 2	<u>l</u> or 2	<u>1</u> or 2	<u>l</u> or 2	<u>1</u> or 2

¹ This function can be specified in your program rather than in the DD statement.

Figure 10. DCB Subparameters for Card Punch

²For QSAM, you must specify both BFALN and BFTEK on the DD statement, or omit both.

³ American National Standard COBOL.

See the description of the FUNC subparameter in the Glossary of DCB Subparameters for a list of possible combinations.

DCB Subparameter	ALGOL	Assembler		COBOL E	COBOL F	ANS COBOL 4	. FORTRAN E	FORTRAN G & H	PL/I F
BFALN=		F or D	1,2						
BFTEK=		S or E (QSAM only)	1,2						
BLKSIZE=	number of bytes	number of bytes	1		number of bytes 1	number of bytes 1	number of bytes	number of bytes	number of bytes 1
BUFL=		number of bytes	1						
BUFNO=		number of buffers	1	number of buffers	number of buffers	number of buffers	1 or <u>2</u>	1 or <u>2</u>	number of buffers
DIAGNS=	TRACE	TRACE		TRACE	TRACE	TRACE	TRACE	TRACE	TRACE
EROPT=		ACC or ABE	1	ACC or ABE	ACC or ABE	ACC or ABE			
FUNC=		any of possible combinations	4	any of 4 possible combinations	any of possible combinations	any of 4 possible combinations	any of possible combinations	any of 4 possible combinations	any of possible combinations
HIARCHY=		0 or 1	1						
LRECL=	number of bytes	number of bytes	1				number of bytes	number of bytes	number of bytes 1
MODE=	C[R]or E[R]	C [R]or E [R]		C [R]or E[R]	C[R]or E[R]	C[R]or E[R]	C[R]or E[R]	C[R]or E[R]	C[R]or E[R]
NCP=		number of channel programs (BSAM only)	1			·			number of thannel programs (BSAM only)
OPTCD=		[c] [u]	1	[c]	[c]	[c]	[c]	[c]	[c][u]
PRTSP=		0, 1, 2, or 3	1,3	0, <u>1</u> , 2, or 3 3	0, <u>1</u> , 2, or 3 <u>3</u>	0, <u>1</u> , 2, or 3 <u>3</u>	0, 1, 2, or 3	0, 1, 2, or 3 3	0, 1, 2, or 3 3
RECFM=	E [B] [A]	U A or M S S A or F B S A M	1				Formatted: U [A] or F [B] [A] Unformatted: VS [B] [A]	Formatted: U A or F B A M Unformatted: VS B A M	U [A] or V [B] [A] or F [B] [A] M

¹ This function can be specified in your program rather than in the DD statement.

Figure 11. DCB Subparameters for Printer

² For QSAM, you must specify both BFALN and BFTEK on the DD statement, or omit both.

³ Do not use if A or M is specified in the RECFM.

⁴American National Standard COBOL.

⁵ See the description of the FUNC subparameter in the Glossary of DCB Subparameters for a list of possible combinations.

DCB Subparameter	ALGOL	Assembler	COBOL E	COBOL F	ANS COBOL 4	FORTRAN E	FORTRAN G & H	PL/I F
BFALN=		F or D 1,2						
BFTEK=		S, E, or A (QSAM only)						
BLKSIZE=	number of bytes	number of bytes		number of bytes	number of bytes	number of bytes	number of bytes	number of bytes
BUFL=		number of bytes						
BUFNO=		number of buffers	number of buffers	number of buffers	number of buffers	1 or <u>2</u>	1 or <u>2</u>	number of buffers
BUFOFF=	5	n or L	n or L	n or L	n or L	n or L	n or L	n or L
DEN=		0,1,2, or 3	0,1, or 2	0,1,2, or 3	0,1,2, or 3	0,1,2, or 3	0,1,2, or 3	0,1,2, or 3
DIAGNS=	TRACE	TRACE	TRACE	TRACE	TRACE	TRACE	TRACE	TRACE
EROPT=		ABE	ABE	ABÉ	ABE			
HIARCHY=		0 or 1						
LRECL=	number of bytes	number of bytes				number of bytes	number of bytes	number of bytes
NCP=		number of channel programs (BSAM only)						number of channel programs (BSAM only)
CPTCD=		[C][T]	[C] [Q] (ASCII)	[C] [Q] (ASCII)	[c]	[c]	[C] [Q] (ASCII)	[c] [1 [Q] (ASCII)
RECFM=	<u>F</u> [8 BS] [A] [D]	U A or M or BS A or BS A M or D B A		D		Formatted: U[A] V[B] [A] or F[B] [A] D[B] [A] Unformatted: VS[B] [A]	Formatted: U[A] or V[B][A] or F[B][A] D[B][A] Unformatted: VS[B][A]	U A or M S S S S A Or M S S S S M S M S M S M S M S M S M S
TRTCH=		C, E, ET, or T	C, E, ET, or T	C, E, ET, or T	C, E, ET, or T	C, E, ET, or T	C, E, ET, or T	C, E, ET, or T

¹ This function can be specified in your program rather than in the DD statement.

Figure 12. DCB Subparameters for Creating a Data Set on Magnetic Tape

² For QSAM, you must specify both BFALN and BFTEK on the DD statement or omit both.

³ If DEN is omitted, see chart on page 137 for assumed values.

⁴ American National Standard COBOL.

⁵ This parameter is specified only for ASCII data sets on magnetic tape.

DCB Subparameter	ALGOL	Assembler	COBOL E	COBOL F	ANS COBOL 3	FORTRAN E	FORTRAN G&H	PL/I F
BFALN=		F or D	1,2					
BFTEK=		S, E, or A (QSAM only)	1,2					
BLKSIZE=	number of bytes	number of bytes	1	number of bytes	number of bytes	number of bytes	number of bytes	number of bytes
BUFL=		number of bytes	1					
BUFNO=		number of buffers	number of buffers	number of buffers	number of buffers	1 or <u>2</u>	1 or <u>2</u>	number of buffers
DIAGNS=	TRACE	TRACE	TRACE	TRACE	TRACE	TRACE	TRACE	TRACE
DSORG=		PS or PSU	1					
EROPT=		ABE	ABE	ABE	ABE			
HIARCHY=		0 or 1	1					
KEYLEN=		number of bytes	1					number of bytes
LRECL=	number of bytes	number of bytes	1			number of bytes	number of bytes	number of bytes
NCP=		number of channel programs (BSAM only)	1					number of channel programs (BSAM only)
OPTCD=		[w] [c] [t]	[c] [w] [c]	[M] [C]	[w] [c]	[c]	[c]	[v] [c]
RECFM=	E[B][A][T]	U[T][A] or B S S V T BS BT ST ST [M] BS BT ST BS BT ST BS BT ST M				Formatted: U[A][T] or V[B][A][T] or F[B][A][T] Unformatted: VS[B][A][T]	Formatted: U[A][T] or V[B][A][T] or F[B][A][T] Unformatted: VS[B][A][T]	U[A] or B VS BS A Or BS A M Or

¹ This function can be specified in your program rather than in the DD statement.

Figure 13. DCB Subparameters for Creating a Sequential Data Set on Direct Access Devices

² For QSAM, you must specify both BFALN and BFTEK on the DD statement or omit both.

³ American National Standard COBOL.

DCB Subparameter	Assembler	COBOL E	COBOL F	ANS COBOL 2	FORTRAN E	FORTRAN G & H	PL/I F
BFALN=	F or D						
BFTEK=	R 1						
BLKSIZE=	number of bytes						number of bytes
BUFL=	number of bytes						
BUFNO=	number of buffers				1 or <u>2</u>	1 or <u>2</u>	
DIAGNS=	TRACE	TRACE	TRACE	TRACE	TRACE	TRACE	TRACE
DSORG=	DA or DAU		DA	DA	DA	DA	DA
HIARCHY=	0 or 1						
KEYLEN=	number of bytes						number of byte
LIMCT=	number of tracks or blocks			number of tracks or blocks			number of track or blocks
OPTCD=	[M] [E][F][R]	[w]	[w]	[w] [E]			[w]
RECFM=	U,V, or F[T]				·		U,V, or F[T]

[,]

Figure 14. DCB Subparameters for Creating a Direct Data Set

² American National Standard COBOL.

DCB Subparameter	Assembler
BFALN=	F or D
BLKSIZE=	number of bytes
BUFL=	number of bytes
BUFNO=	number of buffers
DIAGNS=	TRACE
HIARCHY=	0 or 1
KEYLEN=	number of bytes
LRECL=	number of bytes
NCP=	number of channel programs
OPTCD=	[M] [C]
RECFM=	U[T] A or V B A or BT M or F B A M
¹ This function can be specified in your p the DD statement.	vogram rather than in

Figure 15. DCB Subparameters for Creating a Partitioned Data Set

DCB Subparameter	ALGOL	Assembler		COBOL E	COBOL F	ANS COBOL 3	FORTRAN E	FORTRAN G & H	PL/I F
BFALN=		F or D	1,2						
BFTEK=		S or E (QSAM only)	1,2						
BLKSIZE=	number of bytes	number of bytes	1		number of bytes	number of bytes	number of bytes	number of bytes	number of bytes
BUFL=		number of bytes	Ŀ	,					
BUFNO=		number of buffers	1	number of buffers	number of buffers	number of buffers	1 or <u>2</u>	I or <u>2</u>	number of buffer
DIAGNS=	TRACE	TRACE		TRACE	TRACE	TRACE	TRACE	TRACE	TRACE
EROPT=		ABE	1	ABE	ABE	ABE			
FUNC=		any of possible combinations	4	any of possible combinations	any of possible combinations	any of possible combination:			
HIARCHY=	-	0 or 1	Ŀ						
LRECL=	number of bytes	number of bytes	1				number of bytes	number of bytes	number of bytes
MODE=		$C\begin{bmatrix}O\\R\end{bmatrix}$ or $E\begin{bmatrix}O\\R\end{bmatrix}$	1				$C\begin{bmatrix}O\\R\end{bmatrix}$ or $E\begin{bmatrix}O\\R\end{bmatrix}$	C [O] or E [O] R	
NCP=		number of channel programs (BSAM only)	1						number of chann programs (BSAM only)
OPTCD=		[c]	1	[c]	[c]	[c]	[c]	[c]	[c]
RECFM=	E[B][A]	U[A] or V[B] S [A] or F[S] [A]	1				U[A] or F[B][A]	UA OT FBAM	U[A] or V[S][A] or S[S][A] or F[S][A]
STACK=		l or 2	1	<u>l</u> or 2	<u>1</u> or 2	<u>1</u> or 2	<u>l</u> or 2	<u>1</u> or 2	<u>1</u> or 2

¹This function can be specified in your program rather than in the DD statement.

Figure 16. DCB Subparameters for Card Reader

² For QSAM, you must specify both BFALN and BFTEK on the DD statement, or omit both.

³ American National Standard COBOL.

See the description of the FUNC subparameter in the Glossary of DC8 Subparameters for a list of possible combinations.

DCB Subparameter	ALGOL	Assembler	COBOL E	COBOL F	ANS COBOL 3	FORTRAN E	FORTRAN G & H	PL/I F
BFALN=		F or D	1,2					
BFTEK=		S or E (QSAM only)	1,2			1990		
BLKSIZE=	number of bytes	number of bytes	1	number of bytes 1	number of bytes	number of bytes	number of bytes	number of bytes 1
BUFL=		number of bytes	1			-		
BUFNO=		number of buffers	number of buffers	number of buffers	number of buffers	1 or <u>2</u>	1 or <u>2</u>	number of buffers
CODE=		1,F,B,C,A,T, or N	1					I,F,B,C,A,TorN
DIAGNS=	TRACE	TRACE	TRACE	TRACE	TRACE	TRACE	TRACE	TRACE
EROPT=		ABE	ABE	ABE	ABE			
HIARCHY=		0 or 1	1					
LRECL=	number of bytes	number of bytes	1			number of bytes	number of bytes	number of bytes 1
NCP≈		number of channel programs (BSAM only)					
OPTCD=		[c]	<u>'</u> [c]	[c]	[c]	[c]	[c]	[c]
RECFM=	E(9)(A)	U[A] or V[B] S[A] or F[S] S[A]				U[A] or V[B][A] or F[B][A]	U[A] or V[B][A] or F[B][A]	U or F

¹ This function can be specified in your program rather than in the DD statement.

Figure 17. DCB Subparameters for Paper Tape Reader

² For QSAM, you must specify both BFALN and BFTEK on the DD statement, or omit both.

³ American National Standard COBOL.

159

DCB

Subparameter	ALGOL	Assembler	COBOL E	COBOLF	ANS COBOL -	FORTRAN E	FORTRAN G & H	PL/I F
BFALN=		F or D						
BFTEK=		S, E, or A (QSAM only)				,		
BUFL=		number of bytes						
BUFNO=		number of buffers	number of buffers	number of buffers	number of buffers	1 or <u>2</u>	1 or <u>2</u>	number of buffers
BUFOFF 4		n or L	n or L	n or L	n or L	n or L	n or L	n or L
DIAGNS=	TRACE	TRACE	TRACE	TRACE	TRACE	TRACE	TRACE	TRACE
EROPT=		ABE,ACC, or SKP	ABE, ACC, or SKP	ABE, ACC, or SKP	ABE, ACC, or SKP			
HIARCHY=		0 or 1						
NCP=		number of channel programs (BSAM only)						number of channel programs (BSAM only)
OPTCD=		[C] [Z] [B] [Q] (ASCII)	[C] [Q] (ASCII)	[C] [Q] (ASCII)	[c]	[c]	[C] [Q] (ASCII)	[C] or [Z] [Q] (ASCII)

Figure 18. DCB Subarameters for Retrieving a Data Set on Magnetic Tape

² For QSAM, you must specify both BFALN, and BFTEK on the DD statement, or omit both.

⁴ This parameter is specified only for ASCII data sets on magnetic tape.

³ American National Standard COBOL.

DCB Subparameter	ALGOL	Assembler	COBOL E	COBOL F	ANS COBOL 3	FORTRAN E	FORTRAN G & H	PL/I F
BFALN=		F or D						
BFTEK=		S, E, or A (QSAM only)						
BUFL=		number of bytes						
BUFNO=		number of buffers	number of buffers	number of buffers	number of buffers	1 or <u>2</u>	1 or <u>2</u>	number of buffers
DIAGNS=	TRACE	TRACE	TRACE	TRACE	TRACE	TRACE	TRACE	TRACE
EROPT=		ABE,ACC, or SKP	ABE, ACC, or SKP	ABE, ACC, or SKP				
HIARCHY=		0 or 1						
NCP=		number of channel programs (BSAM only)						

¹ This parameter can be specified in your program rather than in the DD statement.

Figure 19. DCB Subparameters for Retrieving a Sequential Data Set on Direct Access Device

² For QSAM, you must specify both BFALN and BFTEK on the DD statement, or omit both.

³ American National Standard COBOL.

DCB Subparameter	Assembler	COBOL E	COBOL F	ANS COBOL 2	FORTRAN E	FORTRAN G	PL/1 F
BFALN=	F or D						
BFTEK =	R						
BUFL=	number of bytes						
BUFNO=	number of buffers				1 or <u>2</u>	1 or <u>2</u>	number of buffer
DIAGNS=	TRACE	TRACE	TRACE	TRACE	TRACE	TRACE	TRACE
HIARCHY=	0 or 1				,		
LIMCT=	number of tracks or blocks						number of tracks or blocks
OPTCD=	[E][F][R] A						
¹ This function can be specifie	ed in your program rather than in the DD	statement.			<u> </u>		
² American National Standard		**************************************					

Figure 20. DCB Subparameters for Retrieving a Direct Data Set

DCB Subparameter	Assembler
BFALN=	F or D
BUFL=	number of bytes
BUFNO=	number of buffers
DIAGNS=	TRACE
HIARCHY=	0 or 1
NCP=	number of channel programs
OPTCD=	[c]
¹ This parameter can be specified i than in the DD statement.	in your program rather

Figure 21. DCB Subparameters for Retrieving a Partitioned Data Set

The DDNAME Parameter

DDNAME=ddname

ddname

the name of a following DD statement in the same job step that defines this data set.

Rules for Coding

- 1. The only parameters that can be coded with the DDNAME parameter are the DCB subparameters BLKSIZE, BUFNO and DIAGNS.
- 2. The DDNAME parameter cannot appear on a DD statement named JOBLIB.
- 3. You can code the DDNAME parameter up to five times in a job step or procedure step. However, each time the DDNAME parameter is coded, it must refer to a different ddname.
- 4. If the data set, which will be defined later in the job step, is to be concatenated with other data sets, the DD statements that define these other data sets must immediately follow the DD statement that includes the DDNAME parameter.
- The DDNAME parameter must not be used to refer to a DD statement that has DYNAM coded on it.
- 6. A DD statement to which a DDNAME parameter refers cannot contain any reference to a DD statement that follows the one with the DDNAME parameter.
- 7. Do not code DSNAME and DDNAME parameters on the same DD statement.

What the DDNAME Parameter Does

The DDNAME parameter allows you to postpone defining a data set until later in the same job step. In the case of cataloged or in-stream procedures, this parameter allows you to postpone defining a data set in the procedure until the procedure is called by a job step.

The DDNAME parameter is most often used in cataloged procedures and in job steps that call procedures. It is used in cataloged or in-stream procedures to postpone defining data in the input stream until a job step calls the procedure. (Procedures cannot contain DD statements that define data in the input stream, i.e., DD * or DD DATA statements). It is used in job steps that call procedures to postpone defining data in the input stream on an overriding DD statement until the last overriding DD statement for a procedure step. (Overriding DD statements must appear in the same order as the corresponding DD statements in the procedure.)

When You Code the DDNAME Parameter

When the system encounters a DD statement that contains the DDNAME parameter, it saves the ddname of that statement. The system also temporarily saves the name specified in the DDNAME parameter so that it can relate that name to the ddname of a later DD statement. Once a DD statement with that corresponding name is encountered, the name is no longer saved. For example, if the system encounters this statement

//XYZ DD DDNAME=PHOB

the system saves XYZ and, temporarily, PHOB. Until the ddname PHOB is encountered in the input stream, the data set is a dummy data set.

When the system encounters a statement whose ddname has been temporarily saved, it does two things. It uses the information contained on this statement to define the data set; it associates this information with the name of the statement that contained the DDNAME parameter. The value that appeared in the DDNAME parameter is no longer saved by the system. To continue the above example, if the system encounters this statement

```
//PHOB DD DSNAME=NIN, DISP=(NEW, KEEP), UNIT=2400
```

the system uses the data set name and the disposition and unit information to define the data set; it also associates the ddname of the statement that contained the DDNAME parameter with this information. In this example, the ddname used is XYZ; the ddname PHOB is no longer saved. The data set is now defined, just as it would be if you had coded

```
//XYZ DD DSNAME=NIN, DISP=(NEW, KEEP), UNIT=2400
```

The system associates the ddname of the statement that contains the DDNAME parameter with the data set definition information. It does not use the ddname of the later statement that defines the data set. Therefore, any references to the data set, before or after the data set is defined, must refer to the DD statement that contains the DDNAME parameter, not the DD statement that defines the data set. The following sequence of control statements illustrates this:

When you want to concatenate data sets, the unnamed DD statements must follow the DD statement that contains the DDNAME parameter, <u>not</u> the DD statement that defines the data set. The following sequence of control statements illustrates this:

You can use the DDNAME parameter up to five times in a job step or procedure step. However, each time the DDNAME parameter is coded, it must refer to a different ddname.

The DCB subparameters BLKSIZE, BUFNO, and DIAGNS can be coded with the DDNAME parameter. This allows you to assign these DCB characteristics to the data set defined in the referenced DD statement. When the DCB subparameters BLKSIZE, BUFNO, and DIAGNS are coded both on the DD statement that contains the DDNAME parameter and on the referenced DD statement, the subparameters coded on the former are ignored.

These subparameters would most often be coded with the DDNAME parameter when the referenced DD statement defines data in the input stream. Data in the input stream is written onto a direct access device, and the records are blocked as they are written. The input reader procedure normally assigns a block size and number of buffers for blocking. Coding the BLKSIZE subparameter allows you to specify that you want shorter blocks. Coding the BUFNO subparameter allows you to specify that you want fewer buffers. You cannot specify that you want larger blocks or more buffers than would be assigned by the input reader procedure. (When a job is submitted via remote job entry and the BUFNO subparameter is coded, the BUFNO subparameter is ignored.)

Examples of the DDNAME Parameter

```
1. //STEP1 EXEC PGM=PROGRAM8
//DD1 DD DDNAME=INPUT
//DD2 DD DSNAME=WELL,DISP=OLD
```

EXEC PROC=MENT

//STPA

//STEP1.INPUT DD *

The above statements make up the statements for a procedure step named STEP1, which is the first step of a procedure named MENT. The following statements illustrate how you would define DD1 as a data set in the input stream:

```
dat.a
   //ST4
2.
              EXEC PGM=FIFTY
              DD DDNAME=DD5
    //DD1
    //DD2
              DD
                    UNIT=2400
    //DD3
              DD
                    UNIT=2400
    //DD4
              DD
                    SYSOUT=B
    //DD5
               DD
                    DSNAME=ADDN, DISP=(, PASS), UNIT=2400
    //ST5
               EXEC PGM=FINE
                    DSNAME= *.ST4.DD1, DISP=(OLD, KEEP)
    //DD6
               DD
```

The DD statement named DD5 defines the data set for the statement named DD1. The DD statement of the second job step wants the system to obtain the data set name, unit and volume information of this data set. This is done by referring to the DD statement that contains the DDNAME parameter.

```
3. //STEP8 EXEC PGM=BLOCK
//DD1 DD DDNAME=SKIP
// DD DSNAME=A.B.C,DISP=OLD
// DD DSNAME=LEV.FIVE,DISP=OLD
//SKIP DD DSNAME=SEF,DISP=OLD,UNIT=2311,VOLUME=SER=111111
```

The DD statement named SKIP defines the data set for the statement named DD1. The two data sets, A.B.C. and LEV.FIVE, are concatenated with the data set named SEF.

```
4. //STEPX EXEC PGM=PROG12
//DD1 DD DDNAME=LATER, DCB=(BLKSIZE=1600, BUFNO=2)
//DD2 DD UNIT=2400
//DD3 DD SYSOUT=F
//LATER DD *

data
.
.
```

The DD statement named LATER defines the data set for the statement named DD1. The DCB subparameters coded with the DDNAME parameter are used to block the input data.

```
5. //ST EPX EX EC PGM=B403

//DDA DD DSNAME=SEL, DISP=OLD, VOLUME=SER=X3220, UN IT=2400

//DDB DD SYSOUT=B
```

The above statements make up the statements for a procedure step named STEPX, which is the first step of a procedure named TYPE. The following statements illustrate how you would use the DDNAME parameter when overriding both of the DD statements and the first overriding DD statement is to define data in the input stream:

```
//CALL
                EXEC PROC=TYPE
//STEP X. DDA
                DD
                      DD NAME=IN
//ST EPX.DDB
                DD
                      SYSOUT=G
//STEP X. IN
                DD
                data
//MAR
                EXEC PGM=DEPT12
//CARD1
                DD
                      DD NAME=CARD4
//CARD2
                DD
                      UN IT=2400
//CARD3
                DD
                      DS NAME = NI NE.SCR, DISP = OLD
//COGH
                EXEC PGM=DEPT13
```

The DD statement named CARD1 contains the DDNAME parameter. This statement defines a dummy data set since there is no DD statement named CARD4 in the step.

The DISP Parameter

NEW

specifies that the data set is to be created in this job step.

OLD specifies that the data set existed before this job step.

SHR

specifies that the data set existed before this job step and can be used simultaneously (shared) by another job, since it will only be read.

MOD

specifies that the read/write mechanism is to be positioned after the last record in the data set, and, if the system cannot find volume information for the data set, specifies that the data set is to be created.

DELETE

specifies that the data set is no longer needed and its space on the volume is to be released at the end of this job step for use by other data sets.

, KEEP

specifies that the data set is to be kept on the volume at the end of this job step.

.PASS

specifies that the data set is to be passed for use by a subsequent job step in the same job.

CATLG

specifies that the data set is to be kept at the end of this job step and an entry pointing to the data set is to be placed in the system catalog.

, UNCATLG

specifies that the data set is to be kept at the end of this job step but the entry pointing to the data set in the system catalog is to be removed.

specifies that a disposition is not explicitly specified for the data set, but a conditional disposition follows. A new data set is to be deleted and a data set that existed before execution of the job is to be kept at the end of this job step.

, DELETE

specifies that the data set is no longer needed and its space on the volume is to be released for use by other data sets if this step abnormally terminates.

, KEEP

specifies that the data set is to be kept on the volume if this step abnormally terminates.

, CATLG

specifies that an entry pointing to the data set is to be placed in the system catalog if this step abnormally terminates.

, UNCATLG

specifies that the entry pointing to the data set in the system catalog is to be removed if this step abnormally terminates.

Rules for Coding

- If only the first subparameter is coded, you need not enclose it in parentheses.
- If the data set is new, you can omit the subparameter NEW. However, if you specify a disposition or conditional disposition, you must code a comma to indicate the absence of NEW.
- You can omit the DISP parameter if a data set is created and deleted during a job step.
- 4. If you do not want to change the automatic disposition processing performed by the system, you need not code the second subparameter. (When the second subparameter is not coded, the system automatically keeps data sets that did exist before the job and automatically deletes data sets that did not exist before the job.) If you omit the second subparameter and code a conditional disposition, you must code a comma to indicate the absence of the second subparameter.
- 5. The DISP, SYSOUT, and DDNAME parameters are mutually exclusive parameters; therefore, when SYSOUT or DDNAME is coded, do not code the DISP parameter.
- 6. You must specify a disposition of PASS or DELETE for a data set with a system-generated name: i.e., when DSNAME=dsname is omitted from the DD statement. Any other disposition will be overridden by the system with PASS.

WHAT THE DISP PARAMETER DOES

The DISP parameter describes to the system the status of a data set and indicates what is to be done with the data set after termination of the job step that processes it or at the end of the job. You can indicate in the DISP parameter one disposition to apply if the step terminates normally after execution and another to apply if the step terminates abnormally (conditional disposition).

Specifying the Data Set's Status

A data set is either a new data set or an existing data set. What you plan to do with the data set determines which status you code as the first subparameter of the DISP parameter. There are four different subparameters that can be coded. These subparameters allow you to tell the system:

- The data set is to be created in the job step -- NEW.
- The data set existed before this job step -- OLD.
- The data set can be used by other concurrently executing jobs -- SHR.
- The data set is to be lengthened with additional output -- MOD.

At the begining of each job, the system determines by the status you specify in the DISP parameter whether a job is to have exclusive control of a data set. By specifying OLD, NEW, or MOD, you are requesting exclusive control of a data set for the duration of your job. In order to modify an existing data set, you should have exclusive control. If you plan for your job step or job to only read a data set and not to modify it, then you can request shared control of the data set.

The status of a data set that is defined and used in more than one step of a job is determined by the most restrictive status specified. The status that the system assigns to a data set from the information on the DD statement is not for the duration of the step but for the duration of the job. Therefore, in a three step job, if OLD is specified as the status in one step and SHR as the status in the other two steps, the status of the data set for all three steps would be OLD. OLD is a more restrictive status than SHR. This means that if exclusive control of a data set is requested anywhere in a job the data set cannot be shared. In order to share a data set, SHR must be specified every time the data set is defined in the job.

When you Specify NEW as the Data Set's Status

Specifying NEW as the first subparameter of the DISP parameter tells the system that the data set is to be created in the job step and may be used by the processing program to contain output data. If you omit the subparameter NEW, the system assumes the data set is to be created in the job step. (If you omit the subparameter NEW and specify a disposition or conditional disposition, you must code a comma to indicate the absence of NEW.) When the status of a data set is NEW, you must code on the DD statement all of the parameters necessary to define the data set.

Coding NEW guarantees exclusive control of the nontemporary data set name specified in the DSNAME parameter for the data set. Exclusive control of the data set name means that no other job that requests the data set, by that name, can be processed until the job with exclusive control terminates. This also means that the data set name itself is being exclusively controlled. If a request is made for the same data set name, the request will not be processed -- even though the request may refer to an entirely different physical data set.

When you Specify OLD as the Data Set's Status

Specifying OLD as the first subparameter of the DISP parameter tells the system that the data set existed before this job step.

Coding OLD quarantees exclusive control of the nontemporary data set name specified in the DSNAME parameter for the data set. Exclusive control of the data set name means that no other job that requests the data set, by that name, can be processed until the job with exclusive control terminates. This also means that the data set name itself is being exclusively controlled. If a request is made for the same data set name, the request will not be processed -- even though the request may refer to an entirely different physical data set.

When you Specify SHR as the Data Set's Status

Specifying SHR as the first subparameter of the DISP parameter tells the system that the data set resides on a direct access volume or tape volume and other jobs that are executing concurrently with this job step may simultaneously use (share) the data set. When SHR is specified, any job step that uses the data set should only read the data set.

You should have exclusive control of a data set in order to add or update records. If you plan to modify a data set, you should specify OLD or MOD in the DISP parameter. To protect other users of a shared data set, care should be exercised when specifying SHR if you plan to modify the data set. Several users can share a data set and write into it if exclusive control of the data set is acquired. For more information on sharing a data set and on gaining exclusive control of a data set when you have specified SHR, refer to the OS Data Management Services publication.

Caution should be observed when specifying SHR for IBM processor output data sets since no provision is made for acquiring exclusive control of the data sets prior to writing (e.g. SYSGO for the Assembler).

If you code DISP=(SHR, DELETE) the system assumes OLD instead of SHR. Once you specify SHR for a data set, every reference to that data set within the job must specify SHR or the data set can no longer be used by concurrently executing jobs.

When You Specify MOD as the Data Set's Status

Specifying MOD as the first subparameter of the DISP parameter tells the system that when the data set is opened for output, the read/write mechanism is to be positioned after the last record in the data set. MOD is specified when you want to add records to a data set with sequential, indexed sequential, or partitioned organization. MOD should not be specified for data sets with direct organization. When MOD is specified and the number of volumes required to lengthen the data set may exceed the number of units requested, specify a volume count in the VOLUME parameter. This ensures that the data set can be extended to new volumes.

When extending an old data set which at creation specified UNIT=group name, the additional units allocated for extending will not necessarily be of that same group. The same device type will be allocated.

When MOD is specified, the system first assumes the data set exists. If the volume information for the data set is supplied on the DD statement, in the system catalog, or passed with the data set from a previous step and the data set is not there, the system will issue an appropriate error message. Specifying MOD for a new sequential data set causes the read/write mechanism to be positioned after the last record in the data set each time it is opened for output.

Specifying MOD quarantees exclusive control of the nontemporary data set name specified in the DSNAME parameter for the data set. Exclusive control means that no other job that requests the data set, by that name, can be processed until the job with control terminates. This also means that the data set name itself is being exclusively controlled. If a request is made for the same data set name, the request will not be processed -- even though the request may refer to an entirely different physical data set.

If MOD is specified and the volume information exists for a multivolume data set, the first volumes will be mounted on the units allocated. However, if the data set is opened for output with a disposition of MOD, OPEN will start with the last volume, requiring demounting of the first volumes if more volume serial numbers were specified than units allocated. To avoid this inefficiecy, specify DEFER in the UNIT parameter, VOL=REF (for tape data sets only), or an explicit volume sequence number in the VOLUME parameter.

If the data set is opened for OUTPUT or OUTIN, the system will mount the last volume to search for EOF, unless a volume sequence number is specified on the DD statement. In that case, the volume sequence number is used to determine the volume to be mounted. When you lengthen a data set that has standard labels, DCB information in the data control block must agree with the DCB information contained in the data set label. Conflicting DCB information, specifically conflicting block sizes, may make the data set unusable by later jobs. Therefore, do not code the DCB information contained in the data set label on the DD statement. If this DCB information is coded in the DCB macro instruction, be sure it agrees with the information contained in the data set label.

If you extend a data set that has fixed block standard (FBS) records and the last block was a truncated one, an end-of-data set condition occurs when the truncated block is encountered. If an attempt is made to read the data set backward on magnetic tape, processing is terminated immediately (with an end-of-data set condition) upon reading the truncated block.

Specifying a Disposition for the Data Set

The second subparameter of the DISP parameter tells the system what is to be done with the data set at the end of the job step. If you want the data set to assume the same attributes it had before the job, you need not code the second subparameter of the DISP parameter. However, if a conditional dispostion is specified, you must code a comma to indicate the absence of the second subparameter. When the second subparameter is not coded, data sets that existed before the job continue to exist and data sets that were created in the job step are deleted. If you create a nontemporary data set in the job and assign a disposition of PASS to it, the data set is deleted at termination of the job step that receives the passed data set and does not assign a disposition to it. (The passed nontemporary data set is deleted at job termination if the data set is never received by a later job step.)

The system ignores the disposition you have coded and automatically keeps existing data sets and deletes new data sets when the step is abnormally terminated before the step begins execution, e.g., primary direct access space cannot be obtained.

Sometimes the system does not perform disposition processing. The system does no disposition processing of data sets when:

- The job step is bypassed because of an error that is found during interpretation of control statements, e.g., a control statement containing errors is read.
- The job step is bypassed because a return code test is satisfied.
- The job step makes a nonspecific request for a tape volume and the data set is never opened. There is one exception: If you make a nonspecific request for a tape volume for a new generation data set and the data set is never opened, the system catalogs the data set with a volume serial number of blanks. Tape generation data sets that were never opened and that were cataloged may only be uncataloged by specifying the data set name parameter in the format of generation data group name and the relative generation number, or by using the IEHPROGM utility program.
- The job step requests that the mounting of a direct access volume be deferred and the data set is never opened.

Except for the cases mentioned above, the specified disposition is in effect for the data set if the job step terminates normally or abnormally and you have not specified a conditional disposition as the third subparameter of the DISP parameter.

There are five dispositions that can be specified for a data set. These dispositions allow you to:

- Delete a data set -- DELETE.
- Keep a data set -- KEEP.
- Pass a data set to a later job step -- PASS.
- Catalog a data set -- CATIG.
- Uncatalog a data set -- UNCATLG.

When you Specify DELETE as the Disposition

Specifying DELETE as the second subparameter of the DISP parameter tells the system that you want the data set's space on the volume released at the end of the job step. If the catalogued data set is a qualified data set, e.g., A.B.C., the system will automatically delete any index levels which become superfluous except the highest index level. If the data set resides on a tape volume, the tape is rewound and the volume is available for use by other data sets at the end of the job step. If the data set resides on a direct access volume, the system removes the volume table of contents entry associated with the data set and the data set's space is available for use by other data sets at the end of the job step. However, if the direct access data set's expiration date or retention period has not expired, the system does not delete the data set. You can use the IEHPROGM utility program to remove the volume table of contents entry.

If you are deleting a cataloged data set, the entry for the data set in the system catalog is also removed, provided the system obtained volume information for the data set from the catalog, i.e., the volume's serial number was not coded on the DD statement. If the system did not obtain volume information from the catalog, the data set is still deleted but its entry in the catalog remains. If an error is encountered while attempting to delete a data set, its entry in the catalog will not be removed. You may use the IEHPROGM utility program to delete an entry from the catalog.

If the catalogued data set is a qualified data set, e.g., A.B.C., the system will automatically delete any index levels which become superfluous except the highest index level.

When you Specify KEEP as the Disposition

Specifying KEEP as the second subparameter of the DISP parameter tells the system that you want the data set kept intact until a subsequent job step or job requests that the data set be deleted or until the expiration date is passed. (You can specify a retention period or expiration date in the LABEL parameter when the data set is created. If neither is coded in the LABEL parameter, a retention period of zero days is assumed by the system.)

When you Specify PASS as the Disposition

Specifying PASS as the second subparameter of the DISP parameter tells the system that the data set is to be passed after it is used in a job step. The system retains unit and volume information for a passed data set; when you refer to the data set in a DD statement of a subsequent job step, do not code the VOLUME parameter. A passed data set may be referred to in a later job step. You continue to code PASS each time the data set is referred to until the last time it is used in the job. At this time, you assign it a final disposition. If you do not assign the data set a final disposition, the system deletes the data set if it was created in the job and keeps the data set if it existed before the job. (See Appendix C for special consideration when passing ISAM data sets.)

When the data set is not in use, the volume that contains the passed data set remains mounted; therefore, you need not code RETAIN in the VOLUME parameter of a DD statement that specifies a disposition of PASS. If the system must remove the volume that contains the passed data set, it ensures through messages to the operator that the volume is remounted before the data set is used again.

When a subsequent job step wants to use the passed data set, you must include a DD statement for the step. On this DD statement, you must always code the DSNAME and DISP parameters.

- The DSNAME parameter identifies the data set. Either code the data set's name or make a backward reference to an earlier DD statement in the job that defines the data set.
- The DISP parameter specifies the data set's status and disposition.
 (If a later job step is to use this data set, specify a disposition of PASS; if this is the last job step that uses this data set, specify the data set's final disposition.)

The other parameters you might code are UNIT, LABEL, and DCB.

- Code the UNIT parameter if you want more than one device allocated to the data set.
- Code the LABEL parameter if you want to override the processing method specified in the OPEN macro instruction. See the IN and OUT subparameters of the LABEL parameter. (If you are processing a DOS unlabeled tape, code LABEL=(,LTM) if you want the system to test for and bypass a leading tapemark if it is encountered.)
- Code the DCB parameter or a backward reference to the DCB if the DCB information is not supplied by any other source.

If several data sets used in the job have the same name, you can only pass one of these data sets at a time. A job step must refer to a passed data set and assign a disposition of other than PASS to the data set before another data set with the same name can be passed. Only one reference to the data set name of a passed data set should be made within a single job step.

When you Specify CATLG as the Disposition

Specifying CATIG as the second subparameter of the DISP parameter tells the system to create a data set entry in the system catalog that points to this data set. The disposition CATIG also implies a disposition of KEEP. Once the data set is cataloged, you can retrieve the data set in later job steps and jobs by coding the DSNAME parameter and a status of other than NEW in the DISP parameter.

You can specify a disposition of CATLG for an already cataloged data set. This should be done when you are lengthening the data set with additional output (a status of MOD is coded) and the data set may exceed one volume. If the system obtained volume information for the data set from the catalog and you code DISP=(MOD,CATLG), the system updates the entry to include the volume serial numbers of any additional volumes. If there is more than one DD card within the same step reference which extends the same data set, lost data and an incorrect catalog entry may result.

If the data set's name is enclosed in apostrophes, the data set must not be assigned a disposition of CATLG. If the data set you want to catalog has a qualified name, e.g., A.B.C., the system will automatically create all the necessary index levels.

When you Specify UNCATLG as the Disposition

Specifying UNCATLG as the second subparameter of the DISP parameter tells the system that you want the data set's entry in the system catalog removed at the end of the job step; UNCATLG does not tell the system to delete the data set. Later jobs that use this data set must provide on the DD statement all of the parameters necessary to define the data set. If the data set you want to UNCATLG is a qualified data set, e.g., A.B.C., the system will automatically delete any index except the highest level index that becomes superfluous when the data set is removed from the catalog.

Specifying a Conditional Disposition for the Data Set

The third subparameter of the DISP parameter tells the system what is to be done with the data set if the step abnormally terminates. If you do not specify a conditional disposition and the step abnormally terminates, the system uses the disposition specified as the second subparameter of the DISP parameter to determine what is to be done with the data set. (There are a few exceptions and they are noted under "Specifying a Disposition for the Data Set.") If a passed data set has not been received and a job step abnormally terminates, the passed data set assumes the conditional disposition specified the last time it was passed. In this case, conditional disposition processing is done at job termination, not at step termination.

There are four conditional dispositions. When a job step abnormally terminates, these conditional dispositions allow you to:

- Delete a data set -- DELETE.
- Keep a data set -- KEEP.
- Catalog a data set -- CATIG.
- Uncatalog a data set -- UNCATLG.

When you Specify DELETE as the Conditional Disposition

Specifying DELETE as the third subparameter of the DISP parameter tells the system that if the step abnormally terminates you want the data set's space on the volume released. DELETE is the only valid conditional disposition that can be specified for a data set assigned a temporary name or no name. If the data set resides on a tape volume, the tape is rewound and the volume becomes available for use by other data sets at the end of the job step. If the data set resides on a direct access volume, the system removes the volume table of contents entry associated with the data set and the data set's space is available for use by other data sets at the end of the job step. However, if the direct access data set's expiration date or retention period has not expired, the system does not delete the data set. You can use the IEHPROGM utility program to remove the volume table of contents entry.

If the data set is cataloged, its entry in the system catalog is also removed, provided the system obtained volume information for the data set from the catalog, i.e., the volume's serial number was not coded on the DD statement. If the catalogued data set is a qualified data set, e.g., A.B.C., the system will automatically delete any index levels which become superfluous except the highest index level. If the system did not obtain volume information from the catalog, the data set is still deleted but its entry in the catalog remains. In this case, you may use the IEHPROGM utility program to delete the entry.

When you Specify KEEP as the Conditional Disposition

Specifying KEEP as the third subparameter of the DISP parameter tells the system that if the step abnormally terminates you want the data set kept intact until a subsequent job requests that the data set be deleted or until the expiration date has passed. (You can specify a retention period or expiration date in the LABEL parameter when the data set is created. If neither is coded in the LABEL parameter, a retention period of zero days is assumed by the system.)

Note: A scratch volume will be rewound, unloaded, and a KEEP message issued to the operator during abnormal termination of a job step when:
(1) a temporary data set written on the scratch volume has been assigned a nontemporary name, and (2) a conditional disposition of KEEP has been assigned to the data set.

When you Specify CATLG as the Conditional Disposition

Specifying CATIG as the third subparameter of the DISP parameter tells the system that if the step abnormally terminates you want the system to create an entry in the system catalog that points to this data set. The conditional disposition of CATLG also implies a conditional disposition of KEEP. Once the data set is cataloged, you can retrieve the data set in later job steps and jobs by coding the DSNAME parameter and a status of other than NEW in the DISP parameter.

If the data set's name is enclosed in apostrophes, the data set must not be assigned a conditional disposition of CATLG. If the data set has a qualified name, e.g., A.B.C., the system will automatically create all the necessary index levels.

When you Specify UNCATLG as the Conditional Disposition

Specifying UNCATLG as the third subparameter of the DISP parameter tells the system that if the step abnormally terminates you want the data set's entry in the system catalog removed, UNCATLG does <u>not</u> tell the system to delete the data set. Later jobs that use this data set must provide on the DD statement all of the parameters necessary to define the data set if the data set has a qualified name, e.g., A.B.C., the system will automatically delete any index except the highest level index that becomes superfluous when the data set is removed from the catalog.

The system performs disposition processing of data sets at step termination. This processing is based on whether the step terminated normally or abnormally, the data set's status, the requested disposition, and the conditional disposition. Figure 23 shows the disposition processing performed by the system based on these factors.

Status	Requested Disposition	Conditional Disposition	Action Taken at Normal End of Step ¹	Action Taken at Abnormal End of Step 1, when Step Fails Due to:			
				No Allocation Performed	Job Cancelled After Data Set Allocation or Program Check	After Data Set Allocation, Another Allocation Cannot be Performed	Action Taken at End of Job
NEW or MOD ²	none	none	deleted	deleted	deleted	deleted	
	KEEP	none	kept	deleted	kept	deleted	
	DELETE	none	deleted	deleted	deleted	deleted	
	CATLG	none	cataloged	deleted	cataloged	deleted	
	PASS	none	passed	deleted	passed	passed	deleted
	PASS	any except UNCATLG ³	passed	deleted	passed	passed	conditional disposition
	any except PASS	KEEP	requested disposition	deleted	kept	kept	
	any except PASS	DELETE	requested disposition	deleted	deleted	deleted	
	any except PASS	CATLG	requested disposition	deleted	cataloged	cataloged	
OLD or MOD or SHR	none	none	kept	kept	kept	kept	
	KEEP	none	kept	kept	kept	kept	
	DELETE	none	deleted	kept	deleted	kept	
	CATLG	none	cataloged	kept	cataloged	kept	
	UNCATLG	none	uncataloged	kept	uncataloged	kept	
	PASS	none	passed	kept	passed	passed	kept
	PASS	any	passed	kept	passed	passed	conditional disposition
	any except PASS	KEEP	requested disposition	kept	kept	kept	
	any except PASS	DELETE	requested disposition	kept	deleted	deleted	
	any except PASS	CATLG	requested disposition	kept	cataloged	cataloged	
	any except PASS	UNCATLG	requested disposition	kept	uncataloged	uncataloged	

Footnotes:

- See list of exceptions in right-hand column.
- $^2\,$ For MOD, a data set is considered to be a new data set if volume information is not available to the system.
- 3 A conditional disposition other than DELETE is invalid for a data set that is assigned a temporary name or no name. The system assumes DELETE.

List of Exceptions:

- When a nontemporary data set is passed and the receiving step does not assign it a disposition, the system will, upon termination of this step, do one of two things. If the data set was new when it was initially passed, it will be deleted. If the data set was old when initially passed, it will be kept. Temporary data sets are deleted.
- If a job step makes a nonspecific request for a tape volume with the disposition of PASS and the data set is not opened in the step in which it is created, the job will ABEND.
- If a job step requests that the mounting of a direct access volume be deferred and the data set is never opened, no disposition processing is performed.
- 4. If automatic step restart is to occur, all data sets in the restart step with a status of OLD or MOD, and all data sets being passed to steps following the restart step, are kept. All data sets in the restart step with a status of NEW are deleted.
- 5. If automatic checkpoint restart is to occur, all data sets currently in use by the job are kept.
- When dedicated data sets are used in a job step, any disposition assigned to them is internally changed to PASS or KEEP to prevent deletion of the dedicated data sets.

Figure 22. Disposition Processing Chart

Examples of the DISP Parameter

1. //DD DD DSNAME=D99.GROUP.SIX,UNIT=2311,VOLUME=SER=111111, X
// DISP=(NEW,CATIG,DELETE),SPACE=(TRK,(5,1))

This DD statement defines a new data set and requests the system to create an index entry in the system catalog that points to this data set if the step terminates normally. It also requests the system to delete the data set, instead of cataloging it, if the step abnormally terminates. The system will automatically create the indexes in the catalog for D99 and GROUP.

2. //DD2 DD DSNAME=FIX,UNIT=2400-1,VOLUME=SER=44889, X
// DISP=(OLD,,DELETE)

This DD statement defines an existing data set and implies that the data set is to be kept if the step terminates normally. (For an existing data set, the system assumes it is to keep the data set if no disposition is specified.) The statement requests the system to delete the data set if the step abnormally terminates.

3. //STEP1 EXEC PGM=FILL //DD1 DSNAME=SWITCH.LEVEL18.GROUP12,UNIT=2311, VOLUME=SER=LOCAT3, SPACE=(TRK, (80, 15)), DISP=(,PASS) // //STEP 2 EXEC PGM=CHAR //DD2 DDDSNAME=XTRA, DISP=OLD DSNAME=*.STEP1.DD1,DISP=(OLD,PASS,DELETE) //DD3 DD EXEC PGM=TERM //STEP3 //DD4 DSNAME=*.STEP2.DD3, DISP=(OLD, CATLG, DELETE)

The DD statement named DD1 in STEP1 defines a new data set and requests that the data set be passed. If STEP1 abnormally terminates, the data set is deleted since it is a new data set and a conditional disposition was not specified. The DD statement named DD3 in STEP2 receives the passed data set and requests that the data set be passed. If STEP2 abnormally terminates, the data set is deleted because of the conditional disposition of DELETE. The DD statement named DD4 in STEP3 receives the passed data set and requests that the data set be cataloged at the end of the step. If STEP3 abnormally terminates, the data set is deleted because of the conditional disposition of DELETE.

The DLM Parameter

DLM=delimiter

delimiter

the characters that will indicate the end of a group of data in the input stream.

Rules for Coding

- The delimiter can be any combination of two characters.
- If the delimiter contains any special characters, you must enclose the delimiter in apostrophes (5-8 punch).
- If you include an ampersand or an apostrophe in the delimiter, you must code each ampersand or apostrophe as two consecutive ampersands or apostrophes.
- The DLM parameter has meaning only on statements defining data in the input stream (DD * and DD DATA statements).
- If you do code the DLM parameter on a DD * or DD DATA statement, the characters you assign as delimiter override the /* delimiter on the DD * or DD DATA statements. You can then terminate the data with the characters assigned in the DLM parameter.

WHAT THE DLM PARAMETER DOES

The DLM parameter allows you to use a delimiter other than /* to terminate a group of data defined in the input stream. By assigning a different delimiter in the DLM parameter, you can include a delimiter statement with the delimiter /* as data in the input stream.

You code the DLM parameter on a DD * or DD DATA statement. The system recognizes the character you assign in the DLM parameter as the delimiter for the data in the input stream. The new delimiter has meaning only for that group of data defined by the DD statement containing the DLM parameter. If the system encounters an error on the DD statement before the DLM parameter, it will not recognize the value assigned as a delimiter.

The delimiter you assign is coded on the delimiter statement in the same way /* is coded. For detailed information, see the section on the delimiter statement.

Examples of the DLM Parameter

1. //DD1 DD *,DLM=AA

Data

AA

The DLM parameter assigns the characters AA as the valid delimiter for the data defined in the input stream by DD1.

2. //DD2 DD DATA, DCB=BUFNO=2, DLM='&&&&'

data &&

The DLM parameter assigns the characters && as the valid delimiter for the data defined in the input stream by DD2. Since an ampersand is a special character, it must be enclosed in apostrophes in the DLM parameter. Each ampersand must also be written as two consecutive ampersands in the DLM parameter.

The DSNAME Parameter

dsname

identifies a data set name.

dsname(member name)

identifies a nontemporary partitioned data set name and the name of a member within that data set.

dsname (generation number)

identifies a generation data group by its name and a generation data set by its generation number (a zero or signed integer.)

dsname(area name)

identifies a nontemporary indexed sequential data set name and an area of that data set (INDEX, PRIME, or OVFLOW.)

&&dsname

specifies the name you want assigned to a temporary data set.

&&dsname (member name)

specifies the name you want assigned to a temporary partitioned data set and to a member within that data set.

&&dsname(area name)

specifies the name you want assigned to a temporary indexed sequential data set and identifies an area of that data set (INDEX, PRIME, or OVFLOW.)

*.ddname

specifies that the data set name is to be copied from the named DD statement, which is an earlier DD statement in the job step.

*.stepname.ddname

specifies that the data set name is to be copied from an earlier DD statement named ddname, which appears in an earlier step named stepname in the same job.

*.stepname.procstepname.ddname

specifies that the data set name is to be copied from an earlier DD statement in a cataloged procedure. Stepname is the name of the job step that calls the procedure, procstepname is the name of the procedure step that includes the named DD statement, and ddname is the name of the DD statement that contains the data set name.

Rules for Coding

1. An unqualified data set name may consist of 1 to 8 characters. The first character must be an alphabetic or national (2,\$,#) character; the remaining characters can be any alphameric or national characters, a hyphen, or a plus zero (12-0 punch). A temporary data set name can consist of 1 through 8 characters, preceded by two

ampersands; the first character following the ampersands must be an alphabetic or national character.

- 2. A qualified name may consist of up to 44 characters including periods. For each eight characters or less there must be a period, and the character following a period must be an alphabetic or national (a, \$, #) character.
- 3. You need not code the DSNAME parameter if the data set is created and deleted in the job, i.e., if the data set is temporary.
- 4. The DSNAME and DDNAME parameters are mutually exclusive parameters; therefore, when the DDNAME parameter is coded, do not code the DSNAME parameter. The statement to which the DDNAME parameter refers can contain the DSNAME parameter.

IDENTIFYING THE DATA SET

When you create a data set, you use the DSNAME parameter to assign a name to the data set. The data set name is part of the information stored with the data set on a volume. Later, when another job step or job wants to use the data set, it identifies the data set name in the DSNAME parameter; the system uses the data set name to locate the data set on the volume.

How you code the DSNAME parameter depends on the type of data set and whether the data set is nontemporary or temporary.

Creating or Retrieving a Nontemporary Data Set

If the data set is nontemporary, you can identify:

- A nontemporary data set by coding DSNAME=dsname.
- A member of a nontemporary partitioned data set by coding DSNAME=dsname(member name).
- A generation of a nontemporary generation data group by coding DSNAME=dsname(number).
- An area of a nontemporary indexed sequential data set by coding DSNAME=dsname(area name).

NONTEMPORARY DATA SET

When a nontemporary data set is created, it is assigned a name in the DSNAME parameter and is assigned a disposition of KEEP or CATLG. (A data set assigned a disposition of KEEP may be assigned a disposition of CATLG by a later job step or job.) The name you assign to a nontemporary data set must be specified in the DSNAME parameter by all other steps and jobs that want to use the data set.

A nontemporary data set name can be either an unqualified or qualified name. An unqualified data set name consists of 1 through 8 characters. The first character must be an alphabetic or national (2, #, \$) character; the remaining characters can be any alphameric or national characters, a hyphen, or a plus zero (12-0 punch).

A qualified data set name consists of 1 through 44 characters (including periods), except when the qualified name identifies a generation data group. In this case, the data set name may consist of only 1 through 35 characters (including periods). For each eight

characters or less there must be a period, and the first character of the name and the character following a period must be an alphabetic or national (a, #, \$) character.

If you assign a qualified name to a data set that is to be cataloged, the system will generate all the nesessary index levels in the catalog.

When you request a data set that is cataloged on a control volume other than the system catalog, the system attempts to mount this control volume if it is not already mounted. After the system obtains the pointer to this data set, the control volume may then be demounted by the system if the unit on which it was mounted is required by another volume. If you plan to delete, uncatalog, or recatalog the data set, the volume must be mounted during disposition processing (at the end of the job step) in order for the pointer to be deleted or revised. You can ensure that the volume remains mounted by requesting the operator to issue a MOUNT command for this volume before the job step is initiated. If you do not use the MOUNT command to mount the volume and if the volume is not mounted during disposition processing, then, after the job has terminated, use the IEHPROGM utility program to delete or revise the pointer in the control volume. (In order for the system to mount a control volume, the control volume must be logically connected to the system catalog. This is done using the CONNECT function of the IEHPROGM utility program, which is described in the Utilities publication.)

MLMBERS OF A PARTITIONED DATA SET

A partitioned data set consists of independent groups of sequential records, each identified by a member name in a directory. When you want to add a member to a partitioned data set or retrieve a member, you specify the partitioned data set name and follow it with the member name. The member name is enclosed in parentheses and consists of 1 to 8 characters. The first character must be an alphabetic or national (2,5,#) character; the remaining characters can be any alphameric or national characters.

GENERATIONS OF A GENERATION DATA SET

A generation data group is a collection of chronologically related data sets that can be referred to by the same data set name. When you want to add a generation to a generation data group or retrieve a generation, you specify the generation data group name and follow it with the generation number. The generation number is enclosed in parentheses and the number is a zero or a signed integer. A zero represents the highest generation number present in the catalog at the time the current job was started; a negative integer (e.g.,-1) represents an older generation of the group; a positive integer (e.g.,+1) represents a new generation that is to be or has been created in this job and was not present in the catalog at job initiation.

To retrieve all generations of a generation data group (up to 255 generations), code only the group name in the DSNAME parameter and the DISP parameter.

A complete discussion of creating and retrieving generation data sets is contained in "Appendix D: Creating and Retrieving Generation Data Sets" in this publication.

AREAS OF AN INDEXED SEQUENTIAL DATA SET

The areas used for an indexed sequential data set are the index, prime, and overflow areas. When you are creating the data set and define any of these areas on a DD statement, you must identify the data set name and follow it with the area name you are defining. The area name is enclosed in parentheses and is either PRIME, INDEX, or OVFLOW. If you are using only one DD statement to define the entire data set, code DSNAME=dsname or DSNAME=dsname(PRIME). When you retrieve a data set, the term PRIME, INDEX, or OVFLOW is optional. For detailed information on how to create and retrieve indexed sequential data sets, refer to "Appendix C: Creating and Retrieving Indexed Sequential Data Sets" in this publication.

Creating or Retrieving a Temporary Data Set

If the data set is temporary, you can identify:

- A temporary data set by coding DSNAME=&&dsname.
- A member of a temporary partitioned data set by coding DSNAME=&&dsname(member name).
- An area of a temporary indexed sequential data set by coding DSNAME=&&dsname(area name).

TEMPORARY DATA SETS

Any data set that is created and deleted within the same job is a temporary data set. A DD statement that defines a temporary data set need not include the DSNAME parameter; the system generates one for you.

If you do include the DSNAME parameter, the temporary data set name can consist of 1 through 8 characters and is preceded by two ampersands (&&). The character following the ampersands must be an alphabetic or national (a, #, \$) character; the remaining characters can be any alphameric or national characters. (A temporary data set name that is preceded by only one ampersand is treated as a temporary data set name as long as no value is assigned to it either on the EXEC statement for this job step when it calls a procedure, or on a PROC statement within the procedure. If a value is assigned to it by one of these means, it is treated as a symbolic parameter. Symbolic parameters are discussed in Appendix A.)

The system generates a qualified name for the temporary data set with the following format:

SYSyyddd.Tttttttt.xyzzz.jobname. { name unique no.}

The characters are identified as follows:

SYSyyddd SYS - a constant followed by the date

yy - the two-digit year
ddd - the three-digit day

Tttttttt T - a constant followed by a time stamp

ttttttt - seven-digit time stamp

xyzzz x - indicates the type of data set:

R - sysin S - sysout

I - pre-spooled sysin

y - indicates the system configuration:

F - MFT V - MVT

zzz - three numeric characters assigned to
 make the name of the data set unique.

jobname the name of the job for which the data set was created

&name if
specified by
user or a
unique no.

the name you assign to the data set in the DSNAME parameter

a character string beginning with R or S and ending with a seven-digit unique number:

R - sysout and user-defined temporary data sets

S - sysin and pre-spooled sysin data sets

The date and time are constants established for the specific reader creating the temporary data set name. They are initialized when the reader is started. Every temporary data set name created by a specific reader during its operation will have the same date and time.

If you attempt to keep or catalog a temporary data set (you specify a disposition of KEEP or CATIG in the DISP parameter), the system changes the disposition to PASS and the data set is deleted at job termination. However, this change is not made for a data set on a tape volume when the following conditions exist: (1) the data set is new; (2) the data set is not assigned a name; and (3) DEFER is specified in the UNIT parameter. The data set is deleted at job termination, but the system tells the operator to keep the volume on which the data set resided during the job.

MEMBERS OF A TEMPORARY PARTITIONED DATA SET

When you want to add a member to a temporary partitioned data set or retrieve a member during the job, you specify the partitioned data set's temporary name and follow it with the member name. The member name is enclosed in parentheses and consists of 1 to 8 characters. The first character must be an alphabetic or national (2,\$,#) character; the remaining characters can be any alphameric or national characters.

AREAS OF A TEMPORARY INDEXED SEQUENTIAL DATA SET

The areas used for an indexed sequential data set are the index, prime, and overflow areas. When you are creating a temporary indexed sequential data set and define any of these areas on a DD statement, you must identify the data set's temporary name and follow it with the area name you are defining. The area name is enclosed in parentheses and is either PRIME, INDEX, or OVFLOW. If you are using only one DD statement to define the entire temporary data set, code DSNAME=&&dsname or DSNAME=&&dsname(PRIME). If you want to retrieve a data set, the term PRIME, INDEX or OVFLOW is optional. For information on how to create and retrieve indexed sequential data sets, refer to "Appendix C: Creating and Retrieving Indexed Sequential Data Sets" in this publication.

USING A DEDICATED DATA SET

If your installation provides dedicated data sets in a system with MVT, you can use these data sets to contain your data instead of creating your own temporary data sets. The use of dedicated data sets eliminates some of the time required to schedule a job step since the data sets are already allocated.

To use a dedicated data set, code DSNAME=&&name or DSNAME=&name on a DD statement, along with all other parameters required to define your temporary data set, e.g., UNIT, SPACE, DCB. Replace the term "name" with the ddname of the DD statement in the initiator cataloged procedure that defines the dedicated data set you want to use. If the system cannot assign you this dedicated data set, the parameters coded on your DD statement are used to create a temporary data set. (For detailed information on dedicated data sets, refer to the MVT Guide.)

Copying the Data Set Name From an Earlier DD Statement

The name of a data set that is used several times in a job, whether specified in the DSNAME parameter or assigned by the system, can be copied after its first use in the job. This allows you to easily change data sets from job to job and eliminates your having to assign names to temporary data sets. To copy a data set name, refer to an earlier DD statement that identifies the data set. When the earlier DD statement is contained in an earlier job step, you code DSNAME=*.stepname.ddname; when the earlier DD statement is contained in the same job step, you code DSNAME=*.ddname; when the earlier DD statement is contained in a cataloged procedure step called by an earlier job step, you code DSNAME=*.stepname.procstepname.ddname.

Note: If you copy the name for a new data set from an earlier data set that was assigned a disposition of DELETE, the new data set will be temporary. You should assign a disposition of PASS to the new data set. If you do not specify a disposition, or specify a disposition other than PASS, the system assumes PASS.

Specifying the DSNAME Parameter in Apostrophes

Sometimes, it may be necessary or desirable to specify a data set name that contains special characters. If the name contains special characters, you must enclose the name in apostrophes (5-8 punch), e.g., DSNAME='DAT+5'. If one of the special characters is an apostrophe, you must identify it by coding two consecutive apostrophes (two 5-8 punches) in its place, e.g., DSNAME='DAY''SEND'. A data set name enclosed in apostrophes can consist of 1 through 44 characters.

There are cases when your data set name must contain required special characters, which tell the system something about the data set (e.g., && in DSNAME=&&name are required special characters that tell the system that this is a temporary data set). In these cases, the data set name must not be enclosed in apostrophes because the system will not recognize the required special characters as having any special significance. The following data set names contain special characters that tell the system something about the data set and, therefore, cannot be enclosed in apostrophes:

- DSNAME=name(member name)
- DSNAME=name(area name)
- DSNAME=name(generation number)
- DS NAME= & & name
- DSNAME=*.stepname.ddname

X

Keep the following rules in mind:

- If the data set is to be cataloged, the data set name cannot be enclosed in apostrophes.
- If the data set name begins with a blank character, the data set is assigned a temporary data set name by the system.
- If the data set name ends with a blank character, the blank is ignored.
- 4. If the only special character is a period or a hyphen, you need not enclose the data set name in apostrophes.
- 5. If retreiving a data set, unit and volume information should be supplied in the DD statement or should be received as a passed data set.

Examples of the DSNAME Parameter

1. //DD1 DD DSNAME=ALPHA,DISP=(,KEEP), // UNIT=2400,VOLUME=SER=389984

This DD statement defines a new data set whose name is ALPHA. Later job steps or jobs may retrieve this data set by supplying the data set name in the DSNAME parameter, unit information in the UNIT parameter, and volume information in the VOLUME parameter.

2. //DD2 DD DSNAME=PDS(PROG12), DISP=(OLD, KEEP), UNIT=2311, X
// VOLUME=SER=882234

This DD statement retrieves a member of a partitioned data set named PDS.

3. //DD3 DD DSNAME=&&WORK,UNIT=2400

This DD statement defines a temporary data set. Since the data set is deleted at the end of the job step, the DSNAME parameter could be omitted.

4. //STEP1 EXEC PGM=CREATE

//DD4 DD DSNAME=&&ISDATA(PRIME),DISP=(,PASS),UNIT=(2311,2),X

// SPACE=(CYL,(10,,2),,CONTIG),VOLUME=SER=(33489,33490)

//STEP2 EXEC PGM=OPER

//DD5 DD DSNAME=*.STEP1.DD4,DISP=(OLD,DELETE)

The DD statement named DD4 in STEP1 defines a temporary indexed sequential data set whose name is ISDATA. This DD statement is used to define all of the areas of an indexed sequential data set. The DD statement named DD5 in STEP2 retrieves the data set by referring to the earlier DD statement that defines the data set. Since the temporary data set is passed when it is defined in STEP1, STEP2 can retrieve the data set.

The FCB Parameter

image-id

the code that identifies the image to be loaded into the forms control

, ALIGN

requests the operator to check the alignment of the printer forms before the data set is printed.

, VERIFY

requests the operator to visually verify the image displayed on the printer as the desired one. The operator is also given an opportunity to align the printer forms.

Rules for Coding

- 1. The image-id can be 1 to 4 characters in length.
- 2. The FCB parameter is ignored if the data set is not written to a 3211 printer.
- 3. The FCB and DDNAME parameters and the DCB subparameters RKP, CYLOFL, and INTVL are mutually exclusive parameters; therefore, if you code the DDNAME parameter or one of the DCB subparameters RKP, CYLOFL, or INTVL, do not code the FCB parameter.
- 4. If you do not code ALIGN or VERIFY, you need not enclose the image-id in parentheses.

Image Identifier

The image-id is the code that identifies the image to be loaded into the forms control buffer (FCB). It is retrieved from SYS1.IMAGELIB or defined in the user's program through the exit list facility of the DCB macro instruction. IBM provides two standard FCB images, STD1 and STD2.

STD1 specifies that 6 lines per inch are to be printed on an 8.5 inch form. STD2 specifies that 6 lines per inch are to be printed on an 11 inch form. The installation can provide additional user-designed images.

If you omit the FCB parameter and the data set is written to a 3211 printer, the default image is used if it is currently in the buffer. Otherwise, the operator will be requested to specify an image.

REQUESTING ALIGNMENT OF FORMS

If you want to request that the operator check the alignment of the printer forms before the data set is printed, code ALIGN as the second subparameter of the FCB parameter.

REQUESTING OPERATOR VERIFICATION

By specifying VERIFY, you can request that the operator visually verify that the image displayed on the printer is the desired one. Specifying VERIFY also gives the operator an opportunity to align the forms.

DD

Examples of the FCB Parameter

1. //DD1 DD UNIT=3211, FCB=(IMG1, VERIFY)

This DD statement defines the output data set that is to be written to a 3211 printer. The FCB parameter requests that the data set be written using the control information corresponding to the forms control image with the code IMG1. Since VERIFY is coded, the forms control image is displayed on the printer before the data set is printed and the operator is asked to align the printer forms.

2. //DD2 DD SYSOUT=A, FCB=IMG2

This DD statement defines an output data set that is to be written to the device that corresponds with class A. The FCB parameter is ignored if the device is not a 3211 printer.

The LABEL Parameter

LABEL=([data set sequence number] [,SL,SUL, NOPWREAD],IN (,)) [EXPDT=yyddd)

RETPD=nnnn |

NSL, NL, BLP, LTM

data set sequence number specifies the relative position of a data set on a tape volume.

- ,SL specifies that the data set has IBM standard labels.
- , SUL specifies that the data set has both IBM standard and user labels.
- ,AL specifies that the data set has American National Standard labels. 1
- ,AUL specifies that the data set has both American National Standard labels and American National Standard user labels. 1
- , NSL specifies that the tape data set has nonstandard labels.
- , NL specifies that the tape data set has no labels.
- specifies that the system is not to perform label processing for the tape data set.
- ,LTM specifies that the system is to check for and bypass a leading tapemark on a DOS unlabeled tape.
- specifies that the data set has standard labels and another subparameter follows.
 - ,PASSWORD specifies that the new data set cannot be used by another job step or job unless the operator can supply the system with the correct password, i.e., the data set cannot be read, changed, extended, or deleted.
 - ,NOPWREAD specifies that the data set can be read without the password, but the operator must give the password before the data set can be changed, extended, or deleted.

The DCB subparameter OPTCD will be treated as if DCB=OPTCD=Q was specified on the DD statement. If you specify an OPTCD on the DD statement, it will be treated as if Q was specified in addition to any other characters you code.

specifies that another subparameter follows and, for a data set, the data set is not to be password protected.

,IN specifies that the data set is to be processed for input only.

,OUT specifies that the data set is to be processed for output only.

specifies that either the RETPD or EXPDT subparameter follows and one or more subparameters precede it.

EXPDT=yyddd

specifies the date when the data set can be deleted or overwritten by another data set. Assign a 2-digit year number and a 3-digit day number.

RETPD=nnnn

specifies the length of time in days that the data set must be kept. Assign the number of days that must pass before the data set can be deleted or overwritten by another data set.

Rules for Coding

- 1. All the subparameters except the last subparameter in the LABEL parameter are positional subparameters. Therefore, if you want to omit a subparameter, you must indicate its absence with a comma.
- If the only subparameter you want to specify is the data set sequence number, RETPD or EXPDT, you can omit the parentheses and commas and code LABEL=data set sequence number, LABEL=RETPD=nnnn, or LABEL=EXPDT=yyddd.
- If the data set has IBM standard labels, you can omit the subparameter SL.
- 4. When you are defining a data set that resides or will reside on a direct access volume, only SUL or SL can be specified as the second subparameter.
- 5. If you are processing ASCII data on unlabeled (NL) tapes, you must code OPTCD=Q in your DCB macro instruction or in the DCB parameter on the DD statement.
- 6. Do not code LTM for magnetic tapes with labels. If you do code LTM for a labeled tape, the system will reject the tape.
- 7. The LABEL, DDNAME, and SYSOUT parameters are mutually exclusive parameters; therefore, if DDNAME or SYSOUT is coded, do not code the LABEL parameter.

DATA SET LABELS

Labels are used by the operating system to identify volumes and the data sets they contain, and to store data set attributes. Data sets residing on magnetic tape volumes usually have data set labels. If data set labels are present, they precede each data set on the volume. Data sets residing on direct access volumes always have data set labels. These data set labels are contained in the volume table of contents at the beginning of the direct access volume.

A data set label may be a standard or nonstandard label. Standard labels can be processed by the system; nonstandard labels must be processed by nonstandard label processing routines, which the installation includes in the system. Data sets on direct access volumes must have standard labels. Data sets on tape volumes usually have standard labels, but can have nonstandard labels or no labels.

Tape label definitions and associated tape label processing are included in the <u>Tape Labels</u> publication. Direct access label definitions and associated direct access label processing are described in "Appendix A: Direct Access Labels" in the <u>Data Management Services</u> publication.

When to Code the LABEL Parameter

The LABEL parameter must be coded if:

- You are processing a tape data set that is not the first data set on the reel; in this case, you must indicate the data set sequence number.
- The data set labels are not IBM standard labels; you must indicate the label type.
- You want to specify what type of labels a data set is to have when it is written on a scratch volume; you must indicate the label type.
- The data set is to be password protected; you must specify PASSWORD when you create the data set.
- The data set is to be processed only for input or output and this conflicts with the processing method indicated in the OPEN macro instruction; you must specify IN, for input, or OUT, for output.
- The data set is to be kept for some period of time; you must indicate a retention period (RETPD) or expiration date (EXPDT).
- You are processing a DOS unlabeled tape and want the system to check for and bypass a leading tapemark on the tape.

THE DATA SET SEQUENCE NUMBER SUBPARAMETER

When you want to place a data set on a tape volume that already contains one or more data sets, you must specify where the data set is to be placed, i.e., the data set is to be the second, third, fourth, etc., data set on the volume. The data set sequence number causes the tape to be positioned properly so that the data set can be written on the tape or retrieved.

The data set sequence number subparameter is a positional subparameter and is the first subparameter that can be coded. The data set sequence number is a 1- to 4-digit number. The system assumes 1, i.e., this is the first data set on the reel, if you omit this subparameter or if you code 0, unless the data set is a passed or cataloged data set. If a data set is cataloged, the system obtains the data set sequence number from the catalog; for a passed data set, the data set sequence number is obtained from the passing step.

When you request the system to bypass label processing (BLP is coded as the label type in the LABEL parameter) and the tape volume contains labels, the system treats anything between tapemarks as a data set. Therefore, in order for the tape with labels to be positioned properly, the data set sequence number must reflect all labels and data sets that precede the desired set. Section I of the <u>Tape Labels</u> publication illustrates where tapemarks appear.

THE LABEL TYPE SUBPARAMETER

The label type ubparameter tells the system what type of label is associated with the data set. The label type subparameter is a positional subparameter and must be coded second, after the data set sequence number subparameter. You can omit this subparameter if the data set has IBM standard labels.

The label type subparameter is specified as:

- SL -- if the data set has IBM standard labels.
- SUL -- if the data set has both IBM standard and user labels.
- AL -- if the data set has American National Standard labels.¹
- AUL -- if the data set has American National Standard labels and American National Standard user.¹
- NSL -- if the data set has nonstandard labels.
- NL -- if the data set has no labels.
- BLP -- if you want label processing bypassed.
- ITM -- if you want the system to check for and bypass a leading tapemark.

SL or SUL is the only label type that can be specified for data sets that reside on direct access volumes.

When SL or SUL is specified, or the label type subparameter is omitted and the data set has IBM standard labels, the system can ensure that the correct tape or direct access volume is mounted. When you specify NSL, installation-provided nonstandard label processing routines must ensure that the correct tape volume is mounted. When you specify NL, BLP or LTM, the operator must ensure that the correct tape volume is mounted. If you specify NL, the data set must not have standard labels. If you specify LTM, the tape must not have labels. When you specify AL or AUL, the system ensures that the correct American National Standard labeled tape is mounted.

For cataloged data sets, label type information is not kept. Therefore, any time you refer to a cataloged data set that has other than standard labels, you must code the LABEL parameter and specify the label type.

BLP is not a label type, but a request to the system to bypass label processing. This specification allows you to use a blank tape or overwrite a seven-track tape that differs from your current parity or density specifications. Bypass label processing is an option of the operating system, specified as a PARM field value in the reader cataloged procedure. If the option is not selected and you have coded BLP, the system assumes NL.

^{*}The DCB subparameter OPTCD will be treated as if DCB=OPTCD=Q was specified on the DD statement. If you specify an OPTCD on the DD statement, it will be treated as if Q was specified in addition to any other characters you code.

Note for BLP: When you request the system to bypass label processing and the tape volume has labels, the system treats anything between tapemarks as a data set. Therefore, in order for a tape with labels to be positioned properly, the data set sequence number subparameter of the LABEL parameter must be coded and the subparameter must reflect all labels and data sets that precede the desired data set. In order to process a multi-volume data set using bypass label processing, it is necessary to treat each volume as a separate data set and concatenate them. In addition, if you change the label attributes in a subsequent step or job, you must ensure that the system demounts the tape before use. Section I of the <u>Tape Labels</u> publication illustrates where tapemarks appear.

LTM is not a label type but a request to the system to check for and bypass a leading tapemark on the tape. In some instances, a tapemark will precede the first data set on unlabeled tapes created by the Disk Operating System (DOS). Unlabeled tapes created by the System/360 Operating System do not contain leading tapemarks. The LTM subparameter allows you to use DOS unlabeled tapes with the System/360 Operating System without making modifications. You can also specify LTM for a multivolume data set on DOS tapes; the system will check for and bypass a leading tapemark on each volume. Do not code LTM with labeled tapes; if you specify LTM for a tape with labels, the system will reject the tape.

The label type subparameter can also be specified when you make a nonspecific volume request for a tape volume (i.e., no volume serial numbers are specified on the DD statement) and you want the data set to have a certain type of labels. If the volume that is mounted does not have the corresponding label type you desire, you may be able to change the label type.

When you specify <u>NL</u> or <u>NSL</u> and the operator mounts a tape volume that contains standard labels, you may use the volume provided: (1) the expiration date of the existing data set on the volume has passed; (2) the existing data set on the volume is not password protected; (3) you make a nonspecific volume request; and (4) the file sequence number is less than two. All of these conditions must be met. If they are not, the system requests the operator to mount another tape volume.

If you specify <u>SL</u> and make a nonspecific volume request, but the operator mounts a tape volume that contains other than IBM standard labels, the system requests the operator to identify the volume serial number and the volume's new owner before the IBM standard labels are written. If the tape volume has American National Standard labels, the system asks the operator for permission to destroy the label. If you specify <u>SL</u> and make a specific volume request, but the volume that is mounted does not contain IBM standard labels, the system rejects the tape and requests the operator to mount the tape volume specified.

THE PASSWORD AND NOPWREAD SUBPARAMETERS

The PASSWORD and NOPWREAD subparameters tell the system that you want the data set to be password protected. If you specify PASSWORD, the data set cannot be read from, written into, or deleted by another job step or job unless the operator can supply the system with the correct password. If you specify NOPWREAD (no password read), the data set can be read without the operator supplying the password, but the password is still required for writing or deleting data sets.

The PASSWORD and NOPWREAD subparameters are positional subparameters and must be coded third, after the data set sequence number subparameter and the label type subparameter or the commas that indicate their absence. If you want the data set password protected, specify PASSWORD when the data set is created. Password protected data sets must have standard labels, either IBM standard or American National Standard labels.

THE IN AND OUT SUBPARAMETERS

The basic sequential access method (BSAM) permits a specification of INOUT or OUTIN in the OPEN macro instruction as the processing method. If you have specified either of these processing methods in the OPEN macro instruction and want to override it, you may be able to do so by coding either the IN or OUT subparameter. For FORTRAN users, the IN and OUT subparameters provide a means of specifying how the data set is to be processed, i.e., for input or output.

When INOUT is specified in the OPEN macro instruction and you want the data set processed for input only, you can specify the IN subparameter. When the IN subparameter is coded, any attempt by the processing program to process the data set for output is treated as an error.

When OUTIN is specified in the OPEN macro instruction and you want the data set processed for output only, you can specify the OUT subparameter. When the OUT subparameter is coded, any attempt by the processing program to process the data set for input is treated as an error.

The IN and OUT subparameters are positional subparameters. If either is coded, it must appear as the fourth subparameter, after the data set sequence number subparameter, the label type subparameter, and the PASSWORD subparameter, or the commas that indicate their absence.

THE RETPD AND EXPDT SUBPARAMETERS

When it is necessary that a data set be kept for some period of time, you can tell the system how long it is to be kept when you create the data set. As long as the time period has not expired, a data set that resides on a direct access volume cannot be deleted by or overwritten by another job step or job. (If it is necessary to delete such a data set, you can use the IEHPROGM utility program to delete the data set. The IEHPROGM utility program is described in the <u>Utilities</u> publication.)

There are two different ways to specify a time period: (1) tell the system how many days you want the data set kept, the RETPD subparameter, or (2) tell the system the exact date after which the data set need no longer be kept, the EXPDT subparameter.

If you code the RETPD subparameter, you specify a 1- to 4-digit number, which represents the number of days the data set is to be kept. (Leap year is not considered when determining the retention period.) If you code the EXPDT subparameter, you specify a 2-digit year number and a 3-digit day number (e.g., January 1 would be 001, July 1 would be 182), which represents the date after which the data set need no longer be kept. When neither the RETPD or EXPDT subparameter is specified for a new data set, the system assumes a retention period of zero days.

To make sure that a temporary data set is deleted at the end of the job, you should not specify a retention period or expiration date, either directly on the LABEL parameter or indirectly by coding DCB=dsname to copy information from the label of a cataloged data set. If you do specify a retention period or expiration date for a temporary

data set, the system will not delete the data set until the time period has expired.

The RETPD or EXPDT subparameter must follow all other subparameters of the LABEL parameter. If no other subparameters are coded, you can code LABEL=RETPD=nnnn or LABEL=EXPDT=yyddd.

Examples of the LABEL Parameter

1. //DD1 DD DSNAME=HERBI, DISP=(NEW, KEEP), UNIT=TAPE,
// VOLUME=SER=T2, LABEL=(3, NSL, RETPD=188)

X

This DD statement defines a new data set. The LABEL parameter tells the system: (1) this data set is to be the third data set on the tape volume; (2) this data set has nonstandard labels; and (3) this data set is to be kept for 188 days.

This DD statement defines a new data set and requests the system to catalog it. The catalog entry for this data set will not indicate that the data set has no labels. Therefore, each time this data set is referred to by a DD statement, the statement must include LABEL=(,NL).

3. //DD3 DD DSNAME=SPECS,UNIT=2400,VOLUME=SER=10222, X
// DISP=OLD,LABEL=4

This DD statement defines an existing data set. The LABEL parameter indicates that the data set is the fourth data set on the tape volume.

4. //STEP1 EXEC PGM=FIV
//DDX DD DSNAME=CLEAR, DISP=(OLD, PASS), UNIT=2400-4 X
// VOLUME=SER=1257, LABEL=(, NSL)
//STEP2 EXEC PGM=BOS
//DDY DD DSNAME=*.STEP1.DDX, DISP=OLD, LABEL=(, NSL)

The DD statement named DDX in STEP1 defines an existing data set that has nonstandard labels and requests the system to pass the data set. The DD statement named DDY in STEP2 receives the passed data set. Unit and volume information is not specified since this information is available to the system; the label type is not available to the system and must be coded.

The OUTLIM Parameter

OUTLIM=number

number

the limit for the number of logical records you want included in the output data set being routed through the output stream. The maximum number that can be specified is 16777215.

Rules for Coding

- The OUTLIM parameter has meaning only if the System Management facilities option with system, job, and step data collection was selected at system generation.
- The OUTLIM parameter is ignored unless SYSOUT is coded in the operand field of the same DD statement.
- 3. The value specified for OUTLIM can be any number from 1 through 16777215.
- 4. If OUTLIM is not specified or if OUTLIM=0 is specified, no output limiting is done.
- The CUTLIM and DDNAME parameters are mutually exclusive and should not be coded together.

What the OUTLIM Parameter Does

The OUTLIM parameter allows you to specify a limit for the number of logical records you want included in the output data set being routed through the output stream. When the number specified is reached, an exit provided by the System Management Facilities option is taken to a user supplied routine that determines whether to cancel the job or increase the limit. If the exit routine is not supplied, the job is cancelled.

Determining the Output Limit

The limit for the number of logical records you want as output must include a system overhead factor. Generally, the value you add to the limit is eight times the blocking factor for your data. (For those programmers who need a more precise value, the system overhead is the number of EXCPs issued each time the OPEN or CLOSE macro instruction is issued for the data set.)

References:

- For information on coding the SYSOUT parameter on the DD statement, refer to the section "The SYSOUT PARAMETER -- MFT, MVT" in this publication.
- 2. A discussion of the System Management Facilities Option is contained in the <u>Introduction</u> publication. Information on user exit routines to be used with the System Management Facilities Option is contained in the publication System Management Facilities Guide.

Example of the OUTLIM Parameter

1. //OUTPUT DD SYSOUT=F,OUTLIM=1000

The limit for the number of logical records is 1000.

The QNAME Parameter -- MFT and MVT with TCAM

QNAME=process name

process name

specifies the name of a TPROCESS macro which defines a destination queue for messages that are to be processed by an application program and creates a process entry for the queue in the Terminal Table.

Rules for Coding

- The process name must consist of 1 through 8 alphameric and national (#,\$,a) characters. The first character must be an alphabetic or national character.
- The process name is identical to the symbolic name on the TPROCESS macro.
- 3. The DCB parameter is the only parameter that can be coded on a DD statement with the QNAME parameter. BLKSIZE, BUFL, LRECL, OPTCD, and RECFM are the only operands that may be specified as subparameters. QNAME is mutually exclusive with DDNAME, DSNAME, and SYSOUT keywords. These subparameters are defined in the Glossary of DCB Subparameters in the section on the DCB parameter.

What the **QNAME** Parameter Does

The text portion of messages received from stations by means of the Telecommunications Access Method (TCAM) may be processed by an application program. The QNAME parameter is used to access these messages for the application program. Like the DUMMY parameter used with sequential access methods, the QNAME parameter does not perform input or output operations on a data set. The process name specified by the QNAME parameter names a TPROCESS macro which serves as the link between the Message Control Program (MCP) and an application program.

An application program exists as a separate system task or subtask in the same computer as the MCP. Messages that are to be processed are placed in a destination queue by the Message Handler of the MCP. The TPROCESS macro defines the destination queue and creates an entry for the queue (a process entry) in the Terminal Table. The user can indicate at execution time which destination queue is to be used by specifying a particular TPROCESS macro in the QNAME parameter on the DD statement.

Example of the QNAME Parameter

//DDY DD QNAME=FIRST, DCB=(RECFM=F, LRECL=80, BLKS IZ E=320)

This DD statement is used in an application program to define data that is to be accessed by TCAM. "FIRST" is the name of the TPROCESS macro that specifies the destination queue through which messages that must be processed by the application program are routed. The DCB parameter is coded to supply information for the data control block that was not supplied in the DCB macro instruction.

The SEP Parameter

SEP=(ddname,...)

ddname

the names of up to eight earlier DD statements in the same job step.

Rules for Coding

- 1. Each ddname must be separated by a comma.
- 2. If only one ddname is coded, you need not enclose it in parentheses.
- 3. If channel separation is critical, use the UNIT parameter to specify a particular channel, using an absolute address or group name. (How to specify a particular channel is described under "Unit Address" in the chapter "The UNIT Parameter.")
- 4. The SEP, AFF, DDNAME, and SYSOUT parameters are mutually exclusive parameters; therefore, when AFF, DDNAME, or SYSOUT is coded, do not code the SEP parameter.

The devices that the system allocates for data sets used in a job step are attached to channels. These channels transmit the data in the data sets from the device to the CPU. When two or more data sets are to be used in a job step, processing time may be shortened if the system transmits data over separate channels.

Requesting Channel Separation

The SEP and AFF parameters can be used to request channel separation. You list in the SEP parameter the names of up to eight earlier DD statements in the job step that define data sets from which channel separation is desired. Coding the AFF parameter is a shortcut method of requesting channel separation, since you refer to an earlier DD statement in the same job step that contains the SEP parameter. (The AFF parameter is described in the chapter "The AFF Parameter.")

If the system finds it impossible in the current environment to satisfy the channel separation request, the system may try to alter the current environment through some operator action. The operator is given the option of bringing a device online, cancelling the channel separation request, or cancelling the job. In certain environments, the operator may also be able to tell the system to wait for devices to become free. If you make a nonspecific request for a direct access volume and request channel separation, your request for separation may be ignored. This happens when the algorithm used to allocate data sets to devices is not able to select the device that would permit the desired channel separation.

Requests for channel separation are ignored for any data sets that have been allocated devices by the automatic volume recognition (AVR) option.

If it is essential that data be transmitted via a particular channel, you can specify an absolute unit address or group name (if the group of devices is associated with one channel) in the UNIT parameter.

If neither the SEP nor AFF parameter is coded, any available channel, consistent with the UNIT parameter requirement, is assigned by the system.

Example of the SEP Parameter

```
//STEP1
          EXEC PGM=STARTS
//DD1
          DD
                DSNAME=X.Y.Z, DISP=OLD
//DD2
          DD
                DSNAME=&&WORK,DISP=(,PASS),UNIT=2311,
                SPACE=(CYL,(3,1))
//DD3
                DSNAME=NABS, DISP=OLD, VOLUME=SER=7110, UN IT=2311
          DD
//DD4
                DSNAME=PARE, DISP=OLD, VOLUME=SER=E59,
                                                                        X
          DD
                UNIT=2311, SEP= (DD2, DD3)
//
```

The system attempts to assign the data set defined by the DD statement named DD4 to a channel other than the ones assigned to the data sets defined by the DD statements DD2 and DD3. Since the SEP parameter did not include the ddname DD1, the data set defined by DD1 and the data set defined by DD4 may or may not be assigned to the same channel.

The SPACE Parameter

SPACE = (\left\{ TRK \ CYL \ blocklength \right\}, (primary quantity \left[, secondary quantity \right] \left[, directory \ , index \right] \right], RLSE \right], RSE \right], ROUND]) \right\}

SPACE = (ABSTR, (primary quantity, address \left[, directory \ , index \right]))

Index \right], directory \right], ALX \right\}

TRK

specifies that space is to be allocated by track.

CYL

specifies that space is to be allocated by cylinder.

block length

specifies the average block length of the data. The system computes how many tracks to allocate.

primary quantity

specifies how many tracks or cylinders are to be allocated, or how many blocks of data are to be contained in the data set. If you also specify a number of tracks or cylinders to be used as a directory or index, the primary quantity will be the total number of tracks or cylinders assigned. (Example: if SPACE=(CYL, (10,1)) is specified, 10 cylinders will be assigned.)

,secondary quantity

specifies how many more tracks or cylinders are to be allocated if additional space is required, or how many more blocks of data may be included if additional space is required.

Â

specifies that the system is not to allocate additional space if it is required, and either a directory space requirement or index space requirement follows.

, directory

specifies the number of 256-byte records that are to be contained in the directory of a partitioned data set.

,index

specifies the number of cylinders that are required for the index of an indexed sequential data set.

RLSE

specifies that space allocated to the data set that is not used is to be released.

specifies that space allocated to the data set that is not used is not to be released and another subparameter follows.

.CONTIG

specifies that space allocated to the data set must be contiguous.

, MXIG

specifies that the space allocated to the data set must be the largest area of contiguous space on the volume and the space must be equal to or greater than the space requested. This subparameter applies only to the primary space allocation.

- ,ALX
 - specifies that up to five different contiguous areas of space are to be allocated to the data set and each area must be equal to or greater than the space requested.
- specifies that CONTIG, MXIG, or ALX is not specified and the ROUND subparameter follows.

,ROUND

specifies that space is requested by specfying the average block length of the data and the space allocated to the data set must be equal to one or more cylinders.

ABSTR

specifies that the data set is to be placed at a specific location on the volume.

primary quantity

specifies the number of tracks to be allocated to the data set.

address

specifies the track number of the first track to be allocated.

,directory

specifies the number of 256-byte records that are to be contained in the directory of a partitioned data set.

. index

specifies the number of tracks that are required for the index of an indexed sequential data set. The number of tracks must be equal to one or more cylinders.

Rules for Coding

- The SPACE parameter has no meaning for tape volumes; however, if a
 data set is assigned to a device class that contains both direct
 access devices and tape devices, e.g., UNIT=SYSSQ, the SPACE
 parameter should be coded.
- If you do not code secondary, directory, or index quantities, you need not enclose the primary quantity in parentheses.
- Code the second format of the SPACE parameter when you want a data set placed in a specific position on a direct access device.
- 4. The SPACE, SPLIT, SUBALLOC, and DDNAME parameters are mutually exclusive parameters; therefore, if SPLIT, SUBALLOC, or DDNAME is coded, do not code the SPACE parameter.

REQUESTING SPACE FOR A DATA SET

Every data set that is to be written on a direct access volume must be allocated space on the volume before the data set can be written. There are three different parameters that can be used to request space -- SPACE, SPLIT, SUBALLOC -- and they are mutually exclusive. The SPLIT and SUBALLOC parameters are discussed in the chapters "The SPLIT Parameter" and "The SUBALLOC Parameter," respectively.

SPECIFYING THE SPACE PARAMETER

Space for data sets is allocated before the job step is executed. If a request for space cannot be satisfied, the job is terminated.

There are two different ways to code the SPACE parameter. One way tells the system how much space you want and lets the system assign specific tracks. The other way tells the system the specific tracks you want.

Letting the System Assign Specific Tracks

When you want the system to assign specific tracks, you must specify in the SPACE parameter:

- The unit of measurement the system should use for allocating space; specify TRK, for tracks, CYL, for cylinders, or the average block length of the data, for blocks.
- The amount of space to be allocated; specify the primary quantity as a number of tracks, cylinder, or blocks.

Optionally, you can specify in the SPACE parameter:

- That additional space is to be allocated to the data set if it is required; specify a secondary quantity of tracks, cylinders, or blocks.
- The size of a directory or index area; specify the number of records required for a directory or the number of cylinders required for an index.
- That unused space is to be released; specify the RLSE subparameter.
- The format of the space allocated to the data set; specify the CONTIG, MXIG, or ALX subparameter.
- That space is to begin with a cylinder; specify the ROUND subparameter.

When a disk operating system (DOS) volume is mounted for use in an IBM System/360 Operating System, you can let the system assign specific tracks on the DOS volume for a new data set. (There are restrictions on the use of an existing DOS data set in an IBM System/360 Operating System; these restrictions are described in the Data Management for System Programmers volume.

SPECIFYING THE UNIT OF MEASUREMENT

The first subparameter of the SPACE parameter identifies the unit of measurement to be used in allocating the data set and can be specified as:

- TRK -- if you want space allocated by track.
- CYL -- if you want space allocated by cylinder. CYL must be specified if you are creating an indexed sequential data set.
- a number of bytes which represents the average block length of the data -- if you want the system to compute and allocate the least number of tracks required to contain the blocks.

Since the next subparameter (primary quantity) tells the system how many of these units you require, specify the unit that makes it most convenient for you to express your space requirement. A request for cylinders (CYL) provides the most efficient performance.

When you request space in units of blocks, the average block length cannot exceed 65,535. If the blocks have keys, code the DCB subparameter KEYLEN on the DD statement and specify the key length, i.e., DCB=KEYLEN=key length.

SPECIFYING A PRIMARY QUANTITY

The primary quantity tells the system how many tracks or cylinders are to be allocated to the data set or how many blocks of data will be written. (Note: You must consider track overflow when computing track requirements.) When the first subparameter of the SPACE parameter specifies the average block length, the system computes the number of tracks (or cylinders if the ROUND subparameter is coded) required based on the number of blocks specified as the primary quantity.

There must be enough available space on one volume to satisfy the primary quantity. If you make a specific request for a single volume and there is not enough space on that volume to satisfy the space request, the job step is abnormally terminated. If you specify multiple volume serial numbers, the system will search each volume until it finds a volume with sufficient space or until it determines that none of the volumes specified contain enough space. If none of the volumes contains enough space to satisfy the request, the job step will be terminated. If you make a nonspecific volume request, i.e., no volume serial numbers are specified on the DD statement, the system selects a mounted volume or causes a volume to be mounted and then determines if there is enough space available on the volume to satisfy the request for space. If there is not enough space available, the system selects another volume. Allocation may wait for space to become available on specific and nonspecific requests if other tasks have data sets allocated on the eligible volumes. Care should be taken in requesting a primary quantity, since an invalid request (e.g., a quantity greater than physical device limits) will cause the system to attempt to find space on all eligible units. This can cause unnecessary mounting of volumes or a wait for space that cannot be satisfied. In the latter case it is necessary to cancel the job.

The system attempts to allocate the primary quantity in contiguous tracks or cylinders. If contiguous space is not available, the system satisfies the space request with up to five noncontiguous blocks (extents) of space. If a user label is requested, the system allocates up to four noncontiguous blocks of space. You can override these system actions by coding the CONTIG, MXIG, or ALX subparameter; these subparameters are discussed later.

If the system assigns a temporary data set to a dedicated data set, the primary quantity specified for the temporary data set is ignored. The system allocates the primary quantity requested on the DD statement defining the dedicated data set. A secondary quantity specified for the temporary data set will, however, override any secondary quantity specified on the DD statement defining the dedicated data set. (For detailed information on dedicated data sets, refer to the chapter "System Reader, Initiator and Writer Catalogs Procedures" in the publication Data Management for System Programmers.)

SECONDARY QUANTITY

The secondary quantity (incremental quantity) tells the system that you want additional space allocated to the data set if it is required. You specify as the secondary quantity how many more tracks or cylinders you want allocated or how many more blocks of data may be written. (When you request space in units of blocks, the system computes the number of tracks required for the primary quantity based on the average block length that you specified in the SPACE parameter. The system computes the number of tracks required for the secondary quantity based on what is specified in the DCB subparameter BLKSIZE. Therefore, include the DCB subparameter BLKSIZE on the DD statement, i.e., DCB=BLKSIZE=maximum block length.) Specifying a secondary quantity is optional.

If you do specify a secondary quantity and the data set requires additional space, the system allocates this space based on the quantity you specified. The system attempts to allocate the secondary quantity in contiguous tracks or cylinders. If contiguous space is not available, the system attempts to allocate the secondary quantity in up to five noncontiguous blocks (extents) of space.

Each time the data set requires more space, the system allocates the secondary quantity. This space is allocated on the same volume on which the primary quantity was allocated until: (1) there is not enough space available on the volume to allocate the secondary quantity, or (2) a total of 16 extents have been allocated to the data set. If either of these conditions is satisfied, the system must allocate the secondary quantity on another volume. You can specify this in one of two ways:

- For a specific volume request, specify more than one volume in the VOLUME parameter and request more volumes than devices.
- For a non-specific volume request, code PRIVATE and specify more than one volume in the VOLUME parameter.

If there is no more space available on the volumes that you requested, and if at least one volume is demountable, the system will request scratch volumes to be mounted until either the data set is complete or until all entries in the JFCB are filled. If the entries in the JFCB are already filled or if there is no demountable volume, the job step will abnormally terminate.

If a data set has used all the primary space allocated to it, a later job step can lengthen the data set with additional output by requesting a secondary quantity. You can specify a secondary quantity for an old data set whether or not you specified a secondary quantity when the data set was created. If you did specify a secondary quantity when you created the data set, you can override that quantity by specifying a different secondary quantity when you extend the data set. The secondary quantity you specify when you extend the data set is in effect only for the duration of the job step.

For indexed sequential data sets, a secondary quantity cannot be requested. If you request a secondary quantity for a checkpoint data set, the space cannot be used for a successful completion of the checkpoint entry. To determine how the space is used, refer to the chapter "Checkpoint and Restart" in the <u>Supervisor</u> and <u>Macro Services Instructions</u> publication.

The secondary quantity is a positional subparameter. If you specify a secondary quantity, the quantity must follow the primary quantity. If you do not specify a secondary quantity and specify the size of an index or directory as the next subparameter, you must code a comma to indicate the absence of a secondary quantity.

REQUESTING SPACE FOR A DIRECTORY OR INDEX

If the data set you are creating is a partitioned data set, you must request the system to allocate space for a directory. A directory consists of 256-byte records, and you specify, in the SPACE parameter, how many of these records the directory is to contain. These records contain entries for the members of the partitioned data set. You can determine how many records you should request for the directory by referring to the chapter "Processing a Partitioned Data Set" in the Data Management Services publication.

If the data set you are creating is an indexed sequential data set, you can tell the system, in the SPACE parameter, how many cylinders to allocate for the index. (The alternate way to request space for the index is to include, as one of the DD statements used to define an indexed sequential data set, a DD statement that defines the index and specifies the number of cylinders required for the index as the primary quantity.)

The system can differentiate between a specification of the number of records for a directory and the number of cylinders for an index by examining the DCB parameter on the DD statement. Any DD statement that defines an indexed sequential data set must include the DCB subparameter DSORG=IS or DSORG=ISU. When neither is specified, the system assumes you are requesting space for a directory.

RELEASING UNUSED SPACE -- RLSE

The RLSE subparameter allows you to request the system to delete unused space when the data set is closed. The space is released according to the units of space specified on the current DD statement for the data set. If you requested space in units of tracks, any unused tracks are released. If you requested space in units of cylinders, any unused cylinders are released. If you requested space in units of blocks, any unused tracks or cylinders (if ROUND was specified) are released. Note that the current DD statement's units of space can differ from the units specified during the initial allocation of the data set.

If you code the SPACE parameter on the DD statement that defines an output data set and includes the RLSE subparameter, the data set's unused space is released. Closing an output data set will not release space unless RLSE is specified on the current DD statement for the data set even if RLSE was specified when the data set was initially allocated.

If you code the SPACE parameter on a DD statement that defines an existing data set and include the RLSE subparameter, the data set's unused space is released.

If you have specified RLSE and the job step abnormally terminates, unused space is not released.

The RLSE subparameter is a positional subparameter. If you omit the RLSE subparameter and another subparameter follows, indicate the absence of the RLSE subparameter with a comma.

The RLSE subparameter is ignored when the TYPE-T option is coded in the CLOSE macro instruction.

SPECIFYING THE FORMAT OF ALLOCATED SPACE -- CONTIG, MXIG, OR ALX

The system attempts to allocate space in contiguous tracks or cylinders. If contiguous space is not available, the system satisfies the space request with up to five noncontiguous blocks of space. If a user label is requested, the system allocates up to four noncontiguous blocks of space. You can override these system actions by coding the CONTIG, MXIG, or ALX subparameter.

The CONTIG (contiguous) subparameter tells the system that the space it allocates to a data set must be contiguous. If the request cannot be satisfied, the job is terminated. If secondary space is allocated to the data set, it may not be contiguous to the original space allocated to the data set.

The MXIG (maximum contiguous) subparameter tells the system to allocate the largest area of contiguous space available on the volume. The area must be at least as large as the primary quantity requested. The MXIG subparameter cannot be specified for an indexed sequential data set.

The ALX (all extents) subparameter tells the system to allocate up to five different areas of contiguous space. If a user label is requested, the system allocates up to four different areas of contiguous space. Each area is to be at least as large as the primary quantity you requested. The system allocates as many areas, up to the maximum, as are available. The ALX subparameter cannot be specified for an indexed sequential data set.

Whichever of these subparameters you choose must follow either the RISE subparameter or the comma that indicates its absence. If you do not specify one of these subparameters and the ROUND subparameter follows, indicate the absence of the CONTIG, MXIG, and ALX subparameters with a comma.

ALLOCATING WHOLE CYLINDERS -- ROUND

When you request space in units of blocks, you can request that the allocated space be equal to one or more cylinders. To request this, code ROUND as the last subparameter in the SPACE parameter. The system computes the number of tracks required to hold the blocks, and ensures that the space begins on the first track of a cylinder and ends on the last track of a cylinder.

Assigning Specific Tracks

You can place a data set in a specific position on a direct access volume by specifying in the SPACE parameter:

- ABSTR as the first subparameter.
- How many tracks you want allocated.
- The relative track number of the beginning track on which you want the data set placed.

If the data set is a partitioned data set, you must also specify how many records you want allocated for a directory. If the data set is an indexed sequential data set, you can also indicate how many tracks are required for the index. (The number of tracks you specify must be equal to one or more cylinders, and any other DD statement used to define the indexed sequential data set must specify ABSTR in the SPACE parameter. If either of these conditions is not met, the job is terminated.)

To determine the relative track number, count the first track of the first cylinder on the volume as 0, and count through the tracks on each cylinder until you reach the track on which you want your data set to start. (Track 0 cannot be requested.) The system automatically converts the relative track number to an address; this address varies with different devices. For indexed sequential data sets, the relative track number must correspond to the first track on a cylinder. Capacities of a number of direct access devices are listed in "Data Set Disposition and Space Allocation" in the <u>Data Management Services</u> publication.

If the tracks you request have already been allocated to another data set, the job is terminated.

Examples of the SPACE Parameter

1. //DD1 DD DSNAME=&&TEMP,UNIT=MIXED,SPACE=(CYL,10)

This DD statement defines a temporary data set and requests the system to assign any available tape or direct access volume (UNIT=MIXED specifies a group name of units that consists of tape and direct access devices). If a tape volume is assigned, the SPACE parameter is ignored; if a direct access volume is assigned, the SPACE parameter is used to allocate space to the data set. The SPACE parameter includes only the required subparameters (i.e., the type of units and a primary quantity), and requests the system to allocate 10 cylinders.

2. //DD2 DD DSNAME=ELLN, DISP=(,KEEP), UNIT=2314, X
// VOLUME=SER=11257, SPACE=(1024, (100,25),,,ROUND), X
// DCB=BLKSIZ E= 2048

This DD statement defines a new data set that is to be written on a direct access volume. The SPACE parameter requests the system to compute the space required for the primary quantity; the system computes the space required based on an average block length of 1024 bytes, and up to 100 blocks of data will be written. If more space is required, the system is to compute how much additional space to allocate; the system computes the space required based on a maximum block length of 2048 bytes (specified in the BLKSIZE subparameter), and up to 25 blocks of data will be written. Since the ROUND subparameter is coded, the system ensures that the allocated space begins on the first track of a cylinder and ends on the last track of a cylinder.

3. //DD3 DD DSNAME=PDS12,DISP=(,KEEP),UNIT=2311, X
// VOLUME=SER=26143,SPACE=(TRK,(200,,10),,CONTIG)

This DD statement defines a new partitioned data set. The system allocates tracks to the data set and 10 256-byte records for a directory. Since the CONTIG subparameter is coded, the system allocates 200 contiguous tracks on the volume.

4. //DD4 DD DSNAME=INDSEQ(INDEX), UNIT=2314, DCB=DSORG=IS, X
// DISP=(,KEEP),SPACE=(ABSTR,(20,40))

This DD statement defines the index area for a new indexed sequential data set. The SPACE parameter allocates 20 tracks (for a 2314, 20 tracks equal 1 cylinder), beginning with the fortieth track on the volume (the fortieth track on the volume is the beginning of the third cylinder).

	6.		+ 1 5		Bytes Per					
Device	Storage Medium	Cylinders	Tracks Per Cylinder	Track	Cylinder	Device (in millions)				
2301	Drum	25*	8	20,483	4.09 (million)	4.09				
2302 Disk		Model 3: 492 Model 4: 984	46	4,984	229,264	Model 3: 112.79 Model 4: 225.59				
2303	Drum	80	10	4,892	48,920	3.9				
2311	Disk	200	10	3,625	36,250	7.25				
2314/2319 (each volume)	Disk	200	20	7,294	145,880	29.17				
2321	Strip of Tape	980**	20	2,000	40,000	39.2				

Figure 23. Direct Access Capacities

Maximum Bytes per Record Formatted without Keys							Records	Maximum Bytes per Record Formatted with Keys										
2311	2314 2319	2302	2303	2301	2321	2305-1	2305-2	3330	per Track	2311	2314	2302	2303	2301	2321	2305-1	2305-2	3330
3625 1740	7294 3520	4984 2403	4892 2392	20483 101 <i>7</i> 5	2000 935	14136 6852	14660 7231	13030 6447	1 2	3605 1 <i>7</i> 20	7249 3476	4964 2383	4854 2354	20430 10122	1984 920	13934 6650	14569 7140	12974 6391
1131	2298	1570	1558	6739	592	4424	4754	4253	3	1111	2254	1550	1520	6686	576	4222	4663	4197
830	1693	1158	1142	5021	422	3210	3516	3156	4	811	1649	1139	1104	4968	406	3008	3425	3100
651	1332	912	892	3990	320	2480	2773	2498	5	632	1288	893	854	3937	305	2278	2682	2442
532	1092	749	725	3303	253	1996	2278	2059	6	512	1049	730	687	3250	238	1794	2187	2003
447 384	921	634 546	606 51 <i>7</i>	2812 2444	205 169	1648 1388	1924	1745	7	428	877	614	568	2759	190	1446	1833	1689
334	793 694	479	447	2157	142	1388	1659 1452	1510 1327	8 9	364 315	750 650	527 460	479 409	2391 2104	154 126	1186 984	1568 1361	1454 1271
295	615	425	392	1928	119	1024	1287	1181	10	275	571	406	354	1875	103	822	1196	1125
-				1,720		.02.	1207			2,0	0,.			1070				
263	550	381	346	1741	101	892	1152	1061	11	244	506	362	308	1688	85	690	1061	1005
236	496	344	308	1585	86	782	1040	962	12	217	452	325	270	1532	70	580	949	906
213	450	313	276	1452	73	688	944	877	13	194	407	294	238	1399	58	486	853	821
193 177	377	286 264	249 225	1339 1241	62 53	608 538	863 <i>7</i> 92	805 742	14 15	174 158	368 333	267 245	211 187	1286 1188	47 38	406 336	772 701	749 686
1//	3//	204	223	1241	J3		172	/42	15	136	333	243	107	1100	36	330	701	000
162	347	244	204	1155	44	478	<i>7</i> 30	687	16	143	304	224	166	1102	29	276	639	631
149	321	225	186	1079	37	424	676	639	17	130	277	206	148	1026	21	222	585	583
138 127	298 276	209 196	169 155	1012 952	30 24	376 334	627 584	596 557	18 19	119 108	254 233	190 176	131 11 <i>7</i>	959 899	15	174 132	536 493	540 501
118	258	183	142	897	24	296	544 544	523	20	99	215	163	104	844	7	94	453 453	467
<u> </u>	250	100	172	0,,	20	270	344	323	20		213	100	104	0-7-7		/-	450	10/
109	241	171	130	848	15	260	509	491	21	90	198	152	92	795		58	418	435
102	226	161	119	804	10	230	477	463	22	82	183	142	81	<i>7</i> 51			386	407
95	211	151	109	763	6	200	448	437	23	76	168	132	71	710		ļ	357	381
88 82	199 187	143 135	100	726		174	421	413	24	69	156	123	62 54	673			330	357
82	18/	133	92	691		150	396	391	25	63	144	116	54	638			305	335
77	176	127	84	659		128	373	371	26	58	133	108	46	606			282	315
72	166	121	77	630		106	352	352	27	53	123	102	39	577	1		261	296
67	157	114	70	603		88	332	335	28	48	114	95	32	550		1	241	279
63 59	148 139	108 102	64 58	577 554		70 52	314 297	318 303	29 30	44 40	105 96	89 83	26 20	524 501			223 206	262 247
	137	102	50	334		JZ	27/	303	30	40	76	63	20	301			200	24/

Figure 24. Track Capacities

The SPLIT Parameter

n specifies the number of tracks per cylinder you want allocated to the first data set.

CYL

specifies that space is to be allocated by cylinder.

primary quantity

specifies how many cylinders are to be allocated for use by all the associated data sets.

, secondary quantity

specifies how many more cylinders are to be allocated to a data set if additional space is required.

n the number of tracks per cylinder you want allocated to the data set defined on the DD statement.

percent

the percentage of tracks per cylinder you want allocated to the first data set, a number from 1 through 99.

block length

specifies the average block length of the data. The system computes how many cylinders to allocate.

primary quantity

specifies the total number of blocks to be allocated for use by all the associated data sets.

, secondary quantity

specifies how many more blocks are to be allocated to a data set if additional space is required.

percent

the percentage of tracks per cylinder you want allocated to the data set defined on the DD statement.

Rules for Coding

- 1. The first DD statement that contains the SPLIT parameter must contain volume and unit information. You need not code volume and unit information on the following DD statements that contain the SPLIT parameter.
- If a secondary quantity is not specified, you need not enclose the primary quantity in parentheses.
- The SPLIT, SPACE, SUBALLOC, DDNAME, and SYSOUT parameters are mutually exclusive parameters; therefore, if SPACE, SUBALLOC, DDNAME, or SYSOUT is coded, do not code the SPLIT parameter.

REQUESTING SPACE FOR A DATA SET

Every data set that is to be written on a direct access volume must be allocated space on the volume before the data set can be written. There are three different parameters that can be used to request space -- SPLIT, SPACE, SUBALLOC -- and they are mutually exclusive. The SPACE and SUBALLOC parameters are discussed in the chapters "The SPACE Parameter" and "The SUBALLOC Parameter," respectively.

Specifying the SPLIT Parameter

The SPLIT parameter is specified when data sets defined in a job step require space on the same volume, and you want to minimize access-arm movement by having the data sets share cylinders. The device on which the volume is mounted is said to be operating in a split cylinder mode when the SPLIT parameter is specified. In this mode, two or more data sets are stored so that portions of each data set occupy tracks within every allocated cylinder.

The cylinders allocated to the data sets must be on one volume. If there are not enough cylinders available on the volume to satisfy the request, the job is terminated. The SPLIT parameter cannot be used to allocate space for direct, partitioned, and indexed sequential data sets. If the SPLIT parameter is used to allocate space for data sets that are to reside on a drum storage volume, space is allocated for the data sets, but the data sets are not stored using the split cylinder mode. The space occupied by a data set residing on a cylinder that has been split is not available for reallocation until all data sets sharing the cylinder have been deleted.

The data sets that are to share cylinders are defined by a sequence of DD statements. The first DD statement in the sequence specifies the total amount of space required for all the data sets and the portion of that space required by this data set. Each succeeding DD statement in the sequence requests a portion of the total space.

In the SPLIT parameter, there are two ways to request the total amount of space for data sets that are to share cylinders. You can request the space in units of cylinders or in units of blocks.

REQUESTING SPACE IN UNITS OF CYLINDERS

When you request space in units of cylinders, the first DD statement of the sequence specifies in the SPLIT parameter:

- The number of tracks per cylinder to be allocated to this data set; specify a number.
- Space is to be allocated in units of cylinders; specify CYL.
- How many cylinders are to be allocated for use by all the data sets;
 specify the primary quantity as a number of cylinders.

Optionally, you can specify:

 That additional cylinders are to be allocated to a data set if additional space is required; specify the secondary quantity as a number of cylinders.

Each succeeding DD statement in the sequence specifies a number of tracks per cylinder or number of tracks per cylinder depending upon the preceding DD statement in the sequence, to be allocated to the data set.

If a secondary quantity (incremental quantity) is specified in the SPLIT parameter on the first DD statement in the sequence, any data set that exceeds its allocated space is allocated additional space in the amount of the secondary quantity. This additional space is allocated only to the data set that requires it and the space is not split with the other data sets. If a secondary quantity is not specified and a data set exceeds its allocated space, the job step is terminated.

REQUESTING SPACE IN UNITS OF BLOCKS

When you request space in units of blocks, the first DD statement of the sequence specifies in the SPLIT parameter:

- The percentage of tracks per cylinder to be allocated to this data set; specify a number from 1 to 99.
- The average block length of the data in the data sets; specify the average block length in bytes.
- How many blocks are to be allocated for use by all the data sets;
 specify the primary quantity as a number of blocks.

Optionally, you can specify:

• That additional blocks are to be allocated to a data set if additional space is required; specify the secondary quantity as a number of blocks.

Each succeeding DD statement in the sequence specifies a percentage of tracks per cylinder or number of tracks per cylinder depending upon the preceding DD statement in the sequence, to be allocated to the data set.

When a percentage of tracks per cylinder is requested, the system rounds down to the next full track when calculating the actual number of tracks to be allocated. If the percentage is less than 1 track, it will cause a JCL error.

When you request space in units of blocks, the system computes for you how many cylinders are required. The average block length cannot exceed 65,535 bytes. If the blocks have keys, code the DCB subparameter KEYLEN on the DD statement and specify the key length, i.e., DCB=KEYLEN=key length.

If a secondary quantity (incremental quantity) is specified in the SPLIT parameter on the first DD statement in the sequence, any data set that exceeds its allocated space is allocated additional space. The secondary quantity is specified as a number of blocks, and the system computes how many cylinders to allocate based on this number. This additional space is allocated only to the data set that requires it and the space is not split with the other data sets. If a secondary quantity is not specified and a data set exceeds its allocated space, the job step is terminated.

Examples of the SPLIT Parameter

```
1. //STEP1 EXEC PGM=CREATE

//DD1 DD DSNAME=QUEST,DISP=(,KEEP),UNIT=2311, X

// VOLUME=SER=757500,SPLIT=(3,CYL,(30,1))

//DD2 DD DSNAME=APP,DISP=(,KEEP),SPLIT=4

//DD3 DD DSNAME=SET,DISP=(,KEEP),SPLIT=3
```

This job step contains a sequence of DD statements that define new data sets and request that these data sets share the same cylinders.

The first DD statement of the sequence, named DD1, specifies: (1) three tracks per cylinder are to be allocated to this data set; (2) space is to be allocated in units of cylinders; (3) thirty cylinders are to be allocated for use by all the data sets; and (4) any data set that exceeds the space allocated to it should be allocated another cylinder. The DD statement named DD2 requests that the system allocate 4 tracks per cylinder to this data set. The DD statement named DD3 requests that the system allocate 3 tracks per cylinder to this data set.

2. //STEP2 EXEC PGM=PAGE

//DDX DD DSNAME=ISSA,DISP=("KEEP),UNIT=2314, X

// VOLUME=SER=49463,SPLIT=(18,1024,(700))

//DDY DD DSNAME=SEL12,DISP=(,KEEP),SPLIT=48

//DDZ DD DSNAME=SEVE,DISP=(,KEEP),SPLIT=34

This job step contains a sequence of DD statements that define new data sets and request that these data sets share the same cylinders. The first DD statement of the sequence, named DDX, specifies in the SPLIT parameter: (1) 18 per cent of the tracks per cylinder are to be allocated to this data set; (2) the system is to compute how many cylinders are to be allocated for use by all the data sets based on an average block length of 1024 bytes and 700 blocks are required. The DD statement named DDY requests that the system allocate 48 per cent of the tracks per cylinder to this data set. The DD statement named DDZ requests that the system allocate 34 per cent of the track per cylinder to this data set. Since the first DD statement in the sequence does not specify a secondary quantity, the job is abnormally terminated when any of the data sets exceeds its allocated space.

The SUBALLOC Parameter

TRK

speciifes that space is to be allocated by track.

CYL

specifies that space is to be allocated by cylinder.

block length

specifies the average block length of the data. The system computes how many tracks to allocate.

primary quantity

specifies how many tracks or cylinders are to be allocated, or how many blocks of data are to be contained in the data set.

,secondary quantity

specifies how many more tracks or cylinders are to be allocated if the additional space is required, or how many more blocks of data may be included if additional space is required.

specifies that the system is not to allocate additional space if it is required, and a directory space requirement follows.

, directory

specifies the number of 256-byte records that are to be contained in the directory of a partitioned data set.

.ddname

specifies that the system must allocate space from the data set defined on the earlier DD statement named "ddname" that appears in the same job step.

,stepname.ddname

specifies that the system must allocate space from the data set defined on the DD statement named "ddname", which is contained in an earlier job step named "stepname" that is part of the same job.

, stepname. procstepname. ddname

specifies that the system must allocate space from the data set defined on the DD statement "ddname," which is contained in an earlier procedure step named "procstepname"; the procedure step is part of a cataloged or in-stream procedure called by an earlier job step named "stepname" that is part of the same job.

Rules for Coding

- 1. Before you can use the SUBALLOC parameter, you must define a new data set and request enough contiguous space in the SPACE parameter to contain all of the data sets.
- When you code the SUBALLOC parameter, omit the VOLUME and UNIT parameters.

 The SUBALLOC, SPACE, SPLIT, DDNAME, and SYSOUT parameters are mutually exclusive parameters; therefore, when SPACE, SPLIT, DDNAME, or SYSOUT is coded, do not code the SUBALLOC parameter.

REQUESTING SPACE FOR A DATA SET

Every data set that is to be written on a direct access volume must be allocated space on the volume before the data set can be written. There are three different parameters that can be used to request space -- SUBALLOC, SPACE, SPLIT -- and they are mutually exclusive. The SPACE and SPLIT parameters are discussed in the chapters "The SPACE Parameter" and "The SPLIT Parameter," respectively.

Specifying the SUBALLOC Parameter

The SUBALLOC parameter allows you to place a series of data sets on one volume and in a certain sequence, in a contiguous area of space. This area of space is first allocated to one data set, then later DD statements defining new data sets in the same job may request parts of this space. This is called suballocation. Suballocation is used to minimize access-arm movement when data sets are processed serially. The SUBALLOC parameter cannot be used to allocate space for an indexed sequential data set.

To use suballocation, you must first define a data set on a DD statement and use the SPACE parameter to request space. This data set must be used only for suballocation purposes, i.e., the data set should contain no data. The space you request must be large enough to contain all of the data sets and the space must be contiguous. On this same DD statement, you can request more than one device in the UNIT parameter or more than one volume in the VOLUME parameter. This allows a suballocated data set for which a secondary quantity was requested in the SUBALLOC parameter to be continued on another volume if the data set exceeds its primary quantity.

Once this data set has been defined, other data sets defined in the job can use the previously allocated space by specifying the SUBALLOC parameter. Each DD statement that specifies the SUBALLOC parameter causes the new data set to be assigned to the next area of unused space from the original data set.

You must specify in the SUBALLOC parameter:

- The unit of measurement the system should use for allocating space; specify TRK, for tracks, CYL, for cylinders, or the average block length of the data, for blocks.
- The amount of space to be allocated; specify the primary quantity as a number of cylinders, tracks, or blocks.
- Where in the job the original data set is defined; specify the name of the DD statement that defines the data set and the name of the job step in which the DD statement appears.

Optionally, you can specify in the SUBALLOC parameter:

- That additional space is to be allocated to the data set if it is required; specify a secondary quantity of tracks, cylinders, or blocks.
- The size of a directory; specify the number of records required for a directory.

SPECIFYING THE UNIT OF MEASUREMENT

The first subparameter of the SUBALLOC parameter identifies to the system the unit of measurement to be used in suballocating space for the data set and can be specified as:

- TRK -- if you want space suballocated by track.
- CYL -- if you want space suballocated by cylinder.
- a number of bytes, which represents the average block length of the data -- if you want the system to compute and allocate the least number of tracks required to contain the blocks.

Since the next subparameter tells the system how many of these units you require, specify the unit that makes it most convenient for you to express your space requirement. A request for cylinders (CYL) provides the most efficient performance. Since suballocation works with contiguous tracks or cylinders, when a data set suballocates space from another data set, the space suballocated starts at the first track available. If this track is not on a cylinder boundary, the data set will be allocated in tracks equivalent to the number of cylinders specified.

When you request space in units of blocks, the average block length cannot exceed 65,535 bytes. If the blocks have keys, you must specify the key length in the DCB subparameter KEYLEN=n.

SPECIFYING A PRIMARY QUANTITY

The primary quantity tells the system how many tracks or cylinders are to be suballocated for the data set or how many blocks of data will be written. If there is not enough space available in the original data set to satisfy the primary quantity request, the job is terminated. When the first subparameter of the SUBALLOC parameter specifies the average block length, the system computes the number of tracks required based on the number of blocks specified as the primary quantity.

IDENTIFYING THE ORIGINAL DATA SET

In the SUBALLOC parameter, you must identify the master data set from which space is to be suballocated. Space can be suballocated from an existing master data set -- <u>i.e.</u>, the master data set need not be created in the same job as you create a data set to be suballocated. However, the job must include a DD statement defining the master data set. Refer to this DD statement in the SUBALLOC parameter by coding:

- ddname -- if the DD statement defining the master data set appears in the same job step.
- stepname.ddname -- if the DD statement appears in an earlier job step.
- stepname.procstepname.ddname -- if the DD statement appears in a procedure step that is part of a cataloged or in-stream procedure called by an earlier job step.

SPECIFYING A SECONDARY QUANTITY

The secondary quantity (incremental quantity) tells the system that you want additional space allocated to the data set if it is required. You specify as the secondary quantity how many more tracks or cylinders you want allocated or how many more blocks of data may be written. (When you

request space in units of blocks, the system computes the number of tracks required for the primary quantity based on the average block length that you specified in the SPACE parameter. The system computes the number of tracks required for the secondary quantity based on what is specified in the DCB subparameter BLKSIZE. Therefore, include the DCB subparameter BLKSIZE on the DD statement, i.e., DCB=BLKSIZE=maximum block length.) Specifying a secondary quantity is optional.

If you specify a secondary quantity and the data set requires additional space, the system allocates this space based on the quantity you specified. This additional space is allocated from available space on the volume, not from the space in the original data set from which the system suballocated space for this data set. If more than one device or volume was requested on the same DD statement that requested space for suballocation, the data set can be continued onto another volume.

A data set may use all the space allocated to it and a later job step or job may then try to lengthen the data set with additional output. In this case, the data set can be lengthened only if a secondary quantity was specified when the data set was created and only if there is enough space available on the volume. If a later job step or job is lengthening a data set and specifies a secondary quantity, this quantity overrides, for the duration of the step, any secondary quantity specified when the data set was created.

The secondary quantity is a positional subparameter. If you specify a secondary quantity, the quantity must follow the primary quantity. If you do not specify a secondary quantity and specify the size of a directory as the next subparameter, you must code a comma to indicate the absence of a secondary quantity.

REQUESTING SPACE FOR A DIRECTORY

If the data set you are creating is a partitioned data set, you must request that the system allocate space for a directory. A directory consists of 256-byte records and you specify how many of these records the directory is to contain. These records contain entries for the members of the partitioned data set. You can determine how many records you should request for the directory by referring to the chapter "Processing a Partitioned Data Set" in the <u>Data Management Services</u> publication.

If you request space for a directory in the SUBALLOC parameter, the request must follow the secondary quantity or the comma that indicates its absence.

Examples of the SUBALLOC Parameter

```
EXEC PGM=PREP
1. //STEP1
    //DD1
                    DSNAME=DUM, DISP= (, KEEP), UNIT=2302,
                    VOLUME=SER=ALLDS, SPACE=(CYL, 50,,CONTIG)
    11
    //STEP 2
               EXEC PGM=BSPED
                    DSNAME=SPEC50, DISP=(, KEEP),
    //DD2
                                                                             X
                    SUBALLOC=(CYL, (20,1), STEP1.DD1)
    //
    //DD3
               DD
                    DSNAME=SPEC51, DISP=(, KEEP),
                                                                             Х
                    SUBALLOC=(TRK, (44,7),STEP1.DD1)
    //
    //DD4
                                                                             X
               DD
                    DSNAME=SPEC52, DISP=(, KEEP),
                    SUBALLOC=(CYL, 25, STEP1. DD1)
    11
```

The data set from which space is to be allocated is defined on the DD statement named DD1 in STEP1. Fifty cylinders are allocated to the data set and the cylinders are contiguous. The DD statements named DD2, DD3, and DD4 in STEP2 request a portion of this space in the SUBALLOC parameter by referring the system to the data set defined on the DD statement named DD1 in STEP1. The order of the data sets on the volume, because of the request for suballocation, will be DUM, SPEC50, SPEC51, and SPEC52.

2.	//ST EPX	EX EC	PGM=GARV	
	//DD5	DD	DSNAME=SIMP, DISP=(, KEEP), UNIT=2311,	X
	11		VOLUME=SER=315046, SPACE=(CYL, 100, CONTIG)	
	//DD6	DD	DSNAME=FIEID, DISP=(, KEEP),	X
	//		SUBALLOC=(1024, (800, 60), DD5)	
	//STEPY	EXEC	PGM=BERSS	
	//DD7	DD	DSNAME=PDS, DISP=(, KEEP),	X
	11		SUBALLOC=(CYL, (75,,8),STEPX.DD5)	

The data set from which space is to be suballocated is defined on the DD statement named DD5 in STEPX. One hundred cylinders are allocated to the data set and the cylinders are contiguous. The DD statement named DD6 requests a portion of this space in units of blocks. The system computes how many tracks or cylinders are required for the data set. The DD statement named DD7 in STEPY also requests a portion of the space allocated to the data set defined on the DD statement named DD5 in STEPX. The DD statement named DD7 defines a partitioned data set and requests the system to allocate 8 256-byte records for a directory.

The SYSOUT Parameter

SYSOUT=(classname [,program name] [,form number])

classname

the class associated with the output device to which you want your output data set written.

, program name

the member name of a program in the system library that is to write your output data set, instead of the system output writer, to a unit record device.

specifies that the system output writer is to write your output data set to a unit record device, and a form number follows.

, form number

specifies that the output data set should be printed or punched on a special output form.

Rules for Coding

- The classname can be any alphameric character (A-Z, 0-9).
- The form number is 1 to 4 alphameric and national (0,\$,#) characters.
- If a program name and form number are omitted, you need not enclose the classname in parentheses.
- 4. The UNIT, SPACE, OUTLIM, UCS, FCB, and DCB parameters can be coded with the SYSOUT parameter. Besides the mutually exclusive parameters listed below, other parameters coded with the SYSOUT parameter are ignored.
- 5. The DISP, DDNAME, AFF, SEP, VOLUME, LABEL, SPLIT, and SUBALLOC parameters and the SYSOUT parameter are mutually exclusive parameters; therefore, if any of these parameters are coded, do not code the SYSOUT parameter.

Advantages to Coding the SYSOUT Parameter

When you want a data set printed on an output listing or in the form of punched cards, you can code the UNIT parameter and identify the unit record device you want, or code the SYSOUT parameter and specify the class that corresponds to the type of unit record device you want. There are advantages to coding the SYSOUT parameter:

- 1. You can write your output data set to a direct access device and a system output writer writes the data set to a unit record device at a later time. This allows greater flexibility in scheduling print and punch operations, and improves operating system efficiency. You can also write your output data set directly to a unit record or magnetic tape device.
- 2. The output data set and system messages resulting from the job can be assigned to the same type of unit record device. This is accomplished by specifying the same classname in the SYSOUT and MSGCLASS parameters. (The MSGCLASS parameter is coded on the JOB statement.)

3. When you want the output data set printed or punched on a special output form, you can specify the form number in the SYSOUT parameter and let the system inform the operator at the time the data set is to be written what form is to be used.

THE CLASSNAME

When you code the SYSOUT parameter, you indicate a classname. A classname is an alphameric character (A-Z, 0-9) that corresponds to a type of unit record device. Each installation specifies what classnames correspond to what unit record devices. Therefore, when you specify a classname, the operator knows what type of unit record device you want and he ensures that a system output writer is available to write your output data set to the desired unit record device.

The system determines where system messages resulting from a job are to be written based on what is coded in the MSGCLASS parameter on the JOB statement. If the MSGCLASS parameter is not coded, system messages associated with your job are routed to the default output class specified in the PARM field of the input reader procedure. The default for the MSGCLASS parameter is A unless changed by your installation. Class A corresponds to a printer. If you want your output data set and the system messages resulting from the job written to the same unit record device, you simply code the same class name in both the MSGCLASS and SYSOUT parameters, or omit the MSGCLASS parameter and code your installation's default output class in the SYSOUT parameter.

THE PROGRAM NAME

The system provides system output writers, which transfer your output data set from a direct access volume to the desired unit record device. If there is a special installation program to handle this transfer, you can use this program, instead of a system output writer, by specifying the program's name as the second subparameter in the SYSOUT parameter. The program must be a member of the system library (SYS1.LINKLIB).

If you do not code a program name and code a form number as the last subparameter in the SYSOUT parameter, you must code a comma to indicate the absence of a program name.

THE FORM NUMBER

Each installation provides standard forms to contain printed or punched output. If there is a special output form you want to use, you can specify the form number as the last subparameter in the SYSOUT parameter. The system issues a message to the operator at the time the data set is to be printed or punched, which informs him of the form to be used. If you do not want system messages resulting from the job to appear on the special form, assign a classname in the MSGCLASS parameter on the JOB statement that is different from the classname assigned in the SYSOUT parameter.

CODING OTHER PARAMETERS WITH THE SYSOUT PARAMETER

The UNIT, SPACE, OUTLIM and DCB parameters can be coded with the SYSOUT parameter. The DDNAME, DISP, AFF, SEP, VOLUME, LABEL, SPLIT, UCS, and SUBALLOC parameters are mutually exclusive with the SYSOUT parameter; any other parameters that you code with the SYSOUT parameter are ignored.

You can write output data sets destined for unit records devices to a direct access device instead of immediately writing the data set to the desired unit record device. Later, a system output writer writes the data set to the desired unit record device. In the UNIT parameter, you can request what type of direct access device you want for writing the output data set, how many devices you want (up to a maximum of five), and unit separation from other data sets defined in the job step. In the SPACE parameter, you can specify how much space should be allocated to the data set and that unused space is to be released. If you omit the UNIT parameter, the system assigns a device; if you omit the SPACE parameter, the system assigns the amount of space to be allocated. These values are part of the PARM parameter field in the input reader procedure used to read the input stream.

You can also write an output data set directly to the desired unit record or magnetic tape device. When direct system output is desired, the operator selects a unit record or magnetic tape device for a class by issuing a START DSO (direct system output) command. In addition to the SYSOUT parameter, the DCB and UCS parameters can be coded. If the SYSOUT subparameters other than classname are coded, the specified information is ignored. The UNIT and SPACE parameters are also ignored if direct system output processing is used. Since the type of processing to be used may not always be known, it is advisable to code these parameters in case an intermediate direct access device is used.

The DCB parameter can be coded with the SYSOUT parameter to complete the data control block associated with the output data set. The information contained in this data control block is used when the data set is written to the direct access device and read by the system output writer. However, the output writer's own DCB attributes are used when the data set is written to the desired unit record device.

The OUTLIM parameter allows you to specify a limit for the number of logical records you want included in the output data set being routed through the output stream. The OUTLIM parameter has meaning only in systems with the System Management Facilities option with system, job, and step data collection. Unless the SYSOUT parameter is coded in the operand field of the same DD statement, the OUTLIM parameter is ignored.

JOB SEPARATORS

Your output data is preceded by a job separator if your installation incorporated routines to write job separators. A job separator is a series of three listing pages or three punched cards that separates the output data sets of different jobs. The output data sets from these jobs were written to the same unit. Each page or card contains the name of the job whose data follows, and identifies the output class. Job separators make it easier for the operator to separate the data produced by your job from the data of other jobs.

Examples of the SYSOUT Parameter

1. //DD1 DD SYSOUT=P

This DD statement specifies that the data set is to be written to the unit record device corresponding to class P. Since the UNIT and SPACE parameters are not coded, the system obtains device and space allocation information from the input reader procedure.

2. //JOB50 JOB ,'R.J. WALKER',MSGCLASS=C //STEP1 EXEC PGM=SET //DDX DD SYSOUT=C,DCB=(BUFNO=4,OPTCD=W) The DD statement named DDX specifies that the data set is to be written to the unit record device corresponding to class C. The DCB parameter is coded to complete the data control block associated with this data set. Since the classnames in the SYSOUT parameter and the MSGCIASS parameter, on the JOB statement, are the same, the system messages resulting from this job and the output data set are written to the same unit record device.

3. //DD5 DD SYSOUT=A, UNIT=2314, SPACE=(CYL, (12,1), RLSE)

This DD statement specifies that the data set is to be written to the unit record device corresponding to the standard output class A. The system assigns a 2314 unit and allocates 12 cylinders to the data set, rather than obtaining device and space allocation information from the input reader procedure. Since the RLSE subparameter is coded in the SPACE parameter, any unused space is released.

4. //DD6 DD SYSOUT=(F, 7402)

This DD statement specifies that the data set is to be written to the unit record device corresponding to class F and the output data set is to be printed on a special form. The form number is 7402.

5. //DD7 DD DUMMY, SYSOUT=A, DCB=(BLKSIZE=800, LRECL=400, RECFM=FB)

This DD statement specifies that no writing or allocation is to be done for the data set, but the specified information is to placed in the appropriate system control blocks.

The TERM Parameter -- MVT and TSO

TERM=TS

TS

indicates to the system that the input or output data being defined is coming from or going to a time sharing terminal.

Rules for Coding

- TERM=TS is effective only under the operating system with MVT and the Time Sharing Option (TSO). The TERM parameter is ignored in batch processing, in an MFT operating system, or in a system without TSO.
- 2. TS is the only value that can be specified by the TERM parameter. If any other value is used, a JCL error message is produced.
- 3. A DD statement with TERM=TS can only be concatenated if it is the last DD statement.
- 4. Except for the DCB parameter, all other parameters (including DUMMY, DYNAM and DSNAME=NULLFILE) coded on a DD statement with TERM are ignored.
- If the TERM parameter is coded for batch processing, the parameter is not used, but is checked for syntax.
- 6. The TERM and DDNAME parameters are mutually exclusive; the TERM and DYNAM parameters are mutually exclusive. These combinations should not be coded.

What the TERM Parameter Does

The TERM parameter notifies the operating system that the data set (represented by the DD statement that contains the TERM parameter) is coming from or going to a time sharing terminal. TERM allows your time sharing job to communicate with a terminal device. For example, your program can put out messages to a terminal user requesting data input records. Your program can then read in the data input records supplied by the terminal user, perform operations with this data, and then put out the results to the terminal.

Example of the TERM Parameter

1. //DD1 DD TERM=TS

//DD2 DD UNIT=2400,DISP= (MOD,PASS),TERM=TS

The above two DD statements are equivalent in effect. In the time sharing environment, all the parameters coded on the second DD statement are ignored except the TERM parameter. In a batch processing environment, the UNIT and DISP parameters are used but TERM is ignored.

2. //DD3 DD UNIT=2400, DISP=(MOD, PASS), DCB=(LRECL=80, BLKSIZE=80), TERM=TS, LABEL=(,NL)

In a time sharing environment, all the parameters in the above example except TERM and DCB are ignored.

The UCS Parameter

character set code

identifies the special character set you want for printing the data set.

, FOLD

specifies that you want the chain or train corresponding to the desired character set loaded in the fold mode.

specifies that the chain or train is not to be loaded in the fold mode and the VERIFY subparameter follows.

, VERIFY

specifies that the operator is to verify that the correct chain or train is mounted before the data set is printed.

Rules for Coding

- 1. The character set code can be 1 through 4 characters.
- If the FOLD and VERIFY subparameters are omitted, you need not enclose the character set code in parentheses.
- If the UCS parameter is coded and the data set is not written to a printer with the universal character set (UCS) feature, the UCS parameter is ignored.
- 4. The UCS and DDNAME parameters and the DCB subparameters RKP, CYLOFL, and INTVL are mutually exclusive parameters; therefore, if the DDNAME parameter or one of the DCB subparameters RKP, CYLOFL, or INTVL is coded, do not code the UCS parameter.
- 5. If the SYSOUT parameter is coded and an asynchronous writer is used, the UCS parameter is only recognized for the 3211 printer.

Special Character Sets

The Universal Character Set (UCS) feature allows you to alternately use different sets of print characters. It is available as a special feature on the 1403 printer and as a standard feature on the 3211 printer.

In the UCS parameter you specify what character set you want to use; the operator ensures that the corresponding chain or train is mounted on the printer. In order to use a particular special character set, an image of the character set must be contained in SYS1. IMAGELIB and the chain or train corresponding to the character set must be available for use. IBM provides standard special character sets and the installation may provide user-designed special character sets. How to include the images for these special character sets in SYS1. IMAGELIB is discussed in Data Management for System Programmers.

If you omit the UCS parameter and the data set is written to a printer with the UCS feature, a default character set is used. If the chain or train mounted on the printer does not correspond to a default character set, the operator is requested to identify a default character set and mount the corresponding chain or train.

Note: When the UCS parameter is coded with the SYSOUT parameter and the data set is first written to a direct access device, the UCS specification is not kept. In this case, the operator must either specify the UCS parameter in the START WTR command or add the UCS parameter to the user-designed output writer procedure, if the data set is to be printed with the desired character set.

The first subparameter of the UCS parameter identifies the character set you want for printing your data set. Each character set has a unique 1-through 4-byte code.

IDENTIFYING THE CHARACTER SET

Codes for	1403 codes	for 3211	Characteristics
AN	А	.11	Arrangement A, standard ECBDIC character set. 48 characters.
HN	Н	111	Arrangement H, EBCDIC character set for FORTRAN and COBOL, 48 characters.
	G	11	ASCII character set.
PCAN			Preferred alphameric character set, arrangement A.
PCHN			Preferred alphameric character set, arrangement H.
PN	P	11	PL/1 alphameric character set.
QN			PL/1 preferred alphameric character set for scientific applications.
QNC			PL/1 preferred alphameric character set for commercial applications.
RN			Preferred character set for commercial applications of FORTRAN and COBOL.
SN			Preferred character set for text printing.
TN	Т	11	Character set for text printing, 120 characters.
XN .			High-speed alphameric character set for 1403, Model 2.
YN			High-speed preferred alphameric character set for 1403, Model 3 or N1.

For each user-designed special character set, the installation assigns a unique code. If you want to use one of these, specify the corresponding code in the UCS parameter.

REQUESTING FOLD MODE

FOLD can be coded as the second subparameter of the UCS parameter and requests the fold mode. The fold mode is described in the publication IBM 2821 Control Unit, GA24-3112. The fold mode is most often requested when uppercase and lowercase data is to be printed only in uppercase.

The FOLD subparameter is a positional subparameter. If you omit the FOLD subparameter and code the VERIFY subparameter, you must code a comma to indicate the absence of FOLD.

REQUESTING OPERATOR VERIFICATION

VERIFY can be coded as the last subparameter of the UCS parmeter and requests that the operator visually verify that the character set image corresponds to the graphics of the chain or train that was mounted. When VERIFY is coded, the character set image is displayed on the printer so that the operator can make the verification before the data set is printed.

Examples of the UCS Parameter

DD UNIT=1403, UCS=(YN,, VERIFY)

This DD statement defines an output data set that is to be written to a 1403 printer. The UCS parameter requests that the data set be written using the chain or train corresponding to the special character set with the code YN. Since VERIFY is coded, the character set image is displayed on the printer before the data set is printed.

SYSOUT=G, UCS=PCHN

This DD statement defines an output data set that is to be written to the unit record device that corresponds with class G. If the device is a printer with the universal character set and the writer is a direct SYSOUT writer, the request in the UCS parameter for the special character set with the code PCHN is recognized. Otherwise, the UCS parameter is ignored.

The UNIT Parameter

unit address

identifies a particular unit by its address, which consists of the channel, control unit, and unit numbers.

device type

identifies a particular type of device.

group name

identifies a particular group of devices. The group name and the devices that make up a group are specified during system generation.

,unit count

indicates the number of devices you want assigned to the data set.

p specifies that each volume on which the data set resides is to be assigned a device.

specifies that only one device is required and another subparameter follows. (If the DEFER subparameter is not coded but the SEP parameter is coded, this comma is optional.)

, DEFER

specifies that the system should assign a device(s) to the data set but the volume(s) on which the data set resides should not be mounted until the data set is opened.

,SEP=

indicates that this data set is to be assigned a different direct access device than the devices assigned to certain other data sets, i.e., unit separation.

(ddname,...)

the names of up to eight earlier DD statements in the job step that define data sets from which you want unit separation.

AFF=

indicates that the system should assign the data set to the same device(s) as assigned to another data set, i.e., unit affinity.

ddname

the name of an earlier DD statement in the job step that defines a data set with which you want unit affinity.

Rules for Coding

- If the only subparameter coded in the UNIT parameter is the first subparameter, you need not enclose it in parenthses.
- If the SEP subparameter is the only subparameter you are coding in the UNIT parameter, code UNIT=(,SEP=(ddname,...)).
- If the list of ddnames consists of only one ddname, you need not enclose it in parentheses.

- 4. You need not code the unit count subparameter if you want only one device assigned to the data set.
- 5. The UNIT and DDNAME parameters are mutually exclusive parameters; therefore, if DDNAME is coded, do not code the UNIT parameter.

Providing Unit Information

Before the data set can be used as input to a processing program or written as output by a processing program, the volume on which a data set resides or will reside must be mounted on an input/output device. The UNIT parameter provides the system with the information it needs to assign a device to the data set.

In order for the system to assign a device, you must provide in the UNIT parameter:

 The specific unit you want: code the unit address, or a general description of the device; code the device type or group name.

Optionally, you can:

- Specify how many devices you want assigned to the data set when more than one device is required. You can code the unit count and specify how many devices are required, or in certain cases, imply how many devices are required by coding P.
- Request the system to assign a device to a data set and not to cause the volume on which the data set resides to be mounted until the data set is opened.
- Request the system to assign a data set to a device other than the devices assigned to data sets defined in the same job step; code the keyword subparameter SEP and identify the data sets from which you want unit separation.

Another way to provide unit information is to request unit affinity with another data set by coding UNIT=AFF=ddname. The system obtains unit information from the named DD statement.

Except in a few cases, the UNIT parameter is always coded on a DD statement that defines a data set that requires one or more devices. In the following cases, the system obtains the required unit information from other sources. Therefore, you need not code the UNIT parameter:

- When the data set is cataloged. For cataloged data sets, the system obtains unit and volume information from the catalog. However, if VOLUME=SER=serial number is coded on a DD statement that defines a cataloged data set, the system does not look in the catalog. In this case, you must code the UNIT parameter. If the VOLUME parameter is not coded but you request a device in the UNIT parameter, the request is ignored.
- when the data set is passed from a previous job step. For passed data sets, the system obtains unit and volume information from an internal table. However, if VOLUME=SER=serial number is coded on a DD statement that defines a passed data set, the system does not look in the internal table. In this case, you must code the UNIT parameter. If the VOLUME parameter is not coded but you request a device in the UNIT parameter, the request is ignored.

- When the data set is to use the same volumes assigned to an earlier data set, i.e., VOLUME=REF=reference is coded. In this case, the system obtains unit and volume information from the earlier DD statement that specified the volume serial number or from the catalog. If you request a device in the UNIT parameter, the request is ignored.
- When the data set is to share space or cylinders with an earlier data set, i.e., SUBALLOC or SPLIT is coded. In this case, the system obtains unit and volume information from the earlier DD statement that specifies the total amount of space required for all the data sets. If the VOLUME parameter is coded, it is ignored. If you request a device in the UNIT parameter, the request is ignored. When using VOL=REF reference to a previous DD statement that uses esoteric names the system will allocate to generic, rather than esoteric, names.

In all of these cases, you can code the UNIT parameter when you want more devices assigned.

IDENTIFYING THE DEVICE

You must identify to the system the specific device you want or the type of device you want. To identify a specific device, you must specify a unit address. When a unit address is coded, the system assigns you that unit.

There are two ways to identify the type of device you want: specify a device type, which corresponds to a particular set of device features, or specify a group name, which identifies a group of devices that may be different models. When a device type is coded, the system assigns an available device of that type. When a group name is coded, the system assigns an available device that is part of that group. In all cases, the block size specified for the data cannot exceed the maximum block size permitted for the assigned device.

Unit Address

To identify a device by its unit address, you specify the 3-byte address of the unit. The address is made up of the channel, control unit, and unit numbers. For example, UNIT=180 indicates you want channel 1, control unit 8, and unit 0.

To request a specific bin on a specific 2321, you should code UNIT=address/bin, where "bin" is a number from 0 through 9. For example, UNIT=293/5 indicates you want channel 2, control unit 9, device 3, and bin 5. If you code UNIT=293, you are requesting one of the available bins on that unit.

If you identify a telecommunications device by its unit address, the system will allocate that device on a shared basis whether or not the device is already allocated. Offline telecommunications devices will be allocated just as previously allocated ones will be.

You should not identify a device by its address unless it is absolutely necessary. Specifying a unit address limits unit assignment and may result in a delay of the job if the unit is being used by another job.

Device Type

Device types correspond to particular set of features of input/output devices. When you code a device type, you allow the system to assign any available device of that device type. For example, if the device type

you want is a 2302 Disk Storage Drive, you code UNIT=2302. The system assigns an available 2302. If only one device in the system is of that device type, the system assigns that device. If there is more than one device in the system of that device type, there is a certain degree of device independence.

The device types that can be coded and their descriptions are listed below. (You can code only those device types that were defined during system generation.)

TAPE

Device Type	<u>Device</u>
2400	2400 series Nine-Track Magnetic Tape Drive that can be allocated to a data set written or to be written in 800 bpi when the dual-density feature is not installed on the drive or in 1600 bpi when the dual-density feature is installed on the drive.
2400-1	2400 series Magnetic Tape Drive with Seven-Track Compatibility and without Data Conversion.
2400-2	2400 series Magnetic Tape Drive with Seven-Track Compatibility and Data Conversion.
2400-3	2400 series Nine-Track Magnetic Tape Drive that can be allocated to a data set written or to be written in 1600 bpi density.
2400-4	2400 series Nine-Track Magnetic Tape Drive having an 800 and 1600 bpi density capability.
3400-1	3410 Magnetic Tape with Seven-track Compatability and Data Conversion that can be allocated to a data set written in 200, 556, or 800 bpi density.
3400-2	3420 Magnetic Tape with Seven-Track Compatibility and Data Conversion that can be allocated to a data set written in 556 or 800 bpi density.
3400-3	3410 or 3420 Nine-Track Magnetic Tape drive that can be allocated to a data set written or to be written in 1600 bpi density.
3400-4	3410 or 3420 Nine-Track Magnetic Tape drive having an 800 and 1600 bpi density capability.

The system may assign a tape drive from the 3400 series to satisfy a request for a 2400-series tape. However, the system will not assign a 2400-series tape to satisfy a request for a 3400 tape drive.

DIRECT ACCESS

Device Type	<u>Device</u>
2301	2301 Drum Storage Unit.
2302	2302 Disk Storage Drive.
2303	2303 Drum Storage Unit.
2305-1	2305 Fixed Head Storage Facility Model 1
2305-2	2305 Fixed Head Storage Facility Model 2
2311	2311 Disk Storage Drive.
2314	2314 Storage Facility.
23191	2319 Disk Storage Facility
2321	any bin mounted on a 2321 data cell drive.
3330	3330 Disk Storage Drive

¹To indicate the 2319 in the UNIT parameter, specify UNIT=2314. However, to designate the 2319 as the particular device for your data set, specify UNIT=unit address.

UNIT RECORD

Device Type	Device
1052	1052 Printer-Keyboard.
1275	1275 Optical Reader Sorter (available through Word Trade branch offices only)
1285	1285 Optical Reader
1287	1287 Optical Reader
1288	1288 Optical Reader
1403	1403 Printer or 1404 Printer (continuous form only).
1419	1419 Magnetic Character Reader
1442	1442 Card Read Punch.
1443	1443 Printer.
2495	2495 Tape Cartridge Reader
2501	2501 Card Reader.
2520	2520 Card Read Punch.
2540	2540 Card Read Punch (read feed).
2540-2	2540 Card Read Punch (punch feed).
2671	2671 Paper Tape Reader.
3210	3210 Printer-Keyboard

3211	3211 Printer
3215	3215 Printer-Keyboard
3505	Card Reader
3525	Card Punch (read and print features)
GRAPHIC	
Device Type	<u>Device</u>
1053	1053 Model 4 Printer.
2250-1	2250 Display Unit, Model 1.
2250-3	2250 Display Unit, Model 3.
2260-1	2260 Model 1 Display Station (Local Attachment).
2260-2	2260 Model 2 Display Station (Local Attachment).
2280	2280 Film Recorder.
2282	2282 Film Recorder/Scanner.
3277-1	3277 Display Station (Model 1), Local Attachment
3277-2	3277 Display Station (Model 2), Local Attachment
3 28 4-1	3284 Printer (Model 1), Local Attachment
3284-2	3284 Printer (Model 2), Local Attachment
3286-1	3286 Printer (Model 1), Local Attachment
3286-2	3286 Printer (Model 2), Local Attachment

Group Name

A group name is 1 through 8 alphameric characters and identifies a device or a group of devices. The group of devices can consist of devices of the same type or different direct access and tape device types. Group names are established during system generation.

When you code a group name, you allow the system to assign any available device that is included in the group. (If a group consists of only one device, the system assigns that device.) For example, if all 2301 and 2303 Drum Storage Units are included in the group named DRUM and you code UNIT=DRUM, the system assigns an available 2301 or 2303 device.

If extending a data set that was created using the group name parameter, the additional units allocated will be of the same device type. They will not necessarily be of that same group.

A group may consist of more than one device type. In this case, you should not code this group's group name when you are defining an existing data set, since the volume(s) on which the data set resides may require a different device than the one assigned by the system, i.e., a tape volume must be assigned to a tape device, not a direct access device.

When creating a data set which could require more than one device, a group name which includes more than one device type should not be used. This is necessary to prevent multiple device types from being allocated to the request.

When the automatic volume recognition feature is included in the system and you specify a group name, this feature will assign devices to volumes already mounted, but will not request mounting of any volume that is not mounted.

UNIT COUNT

The unit count subparameter indicates how many devices you want assigned to a data set. If you do not code this subparameter (or code 0) and you do not request parallel mounting, the system assumes you are requesting one device. If you receive a passed data set or refer the system to a cataloged data set or earlier DD statement for volume and unit information (VOLUME=REF=reference), the system will also assume a unit count of 1, even if more devices were requested in an earlier DD statement. The system may ignore a request for a specific number of units if the data set has volume affinity with at least one other data set. See the description of volume affinity in the section on the VOLUME parameter for specific details.

For operating efficiency, you can request multiple devices for a multivolume data set or for a data set that may require additional volumes. When each required volume is mounted on a separate device, time is not lost during execution of the job step while the operator demounts and mounts volumes. The maximum number of devices that can be requested per DD statement is 59.

In the following cases, you should always code the unit count subparameter when the data set may be extended to a new volume:

- If the data set resides on a permanently resident or reserved volume. In these two cases, the volume cannot be demounted in order to mount another volume.
- If the data set is assigned space through suballocation. Code the unit count subparameter on the DD statement that requests the space to be suballocated.

The unit count subparameter is a positional subparameter, and it shares the same position as the subparameter P. If neither of these subparameters is coded and the DEFER or SEP subparameter follows, code a comma to indicate the absence of the unit count subparameter and the subparameter P. (If the DEFER subparameter is not coded but the SEP parameter is coded, you may omit the comma.)

PARALLEL MOUNTING

Requesting parallel mounting has the same effect as specifying a unit count, i.e., more than one device is assigned to the data set. When parallel mounting is requested, the system counts the number of volume serial numbers specified on the DD statement and assigns to the data set as many devices as there are serial numbers. (For cataloged data sets, the system counts the number of volume serial numbers contained in the catalog.) You request parallel mounting by coding the letter P in place of the unit count subparameter.

The subparameter P is a positional subparameter, and it shares the same position as the unit count subparameter. If neither of these subparameters is coded and the DEFER or SEP subparameter follows, code a comma to indicate the absence of the subparameter P and the unit count subparameter. (If the DEFER subparameter is not coded but the SEP subparameter is coded, you may omit the comma.)

DEFERRED MOUNTING

The DEFER subparameter requests the system to assign the required units to a data set and to defer the mounting of the volume(s) on which the data set resides until the processing program attempts to open the data set. The DEFER subparameter should only be coded on DD statements that define data sets residing on removable volumes. The DEFER subparameter cannot be coded on a DD statement that defines an indexed sequential data set or that defines a new data set that is to be written on a direct access volume, because space cannot be allocated to the data set. If DEFER is coded on a DD statement that defines a new direct access data set, DEFER will be ignored.

If you request deferred mounting of a volume and the data set on that volume is never opened by the processing program, the volume is not mounted during the execution of the job step. If a later job step refers to that data set, the system may assign a different device to the data set than was originally assigned to it.

UNIT SEPARATION

When you make nonspecific volume requests for data sets defined in a job step, the system assigns volumes to the data sets. If the DD statements that define these data sets request the same type of device, the system may assign more than one data set to the same device.

If you do \underline{not} want a data set to be assigned to the same device that is assigned to other data sets, you can request this in the SEP subparameter. A request for unit separation has meaning only for direct access devices.

The SEP subparameter appears as the last subparameter in the UNIT parameter. To identify the data sets that should not be assigned the same device as this data set, follow SEP= with a list of ddnames of the DD statements that define these data sets. The listed DD statements must precede this statement and must be contained in the same job step. The list of ddnames must be enclosed in parentheses, unless there is only one ddname. If one of the listed DD statements defines a dummy data set, the system ignores the unit separation request for that data set.

The number of separations allowed per DD statement is the number of implied separations plus the number of specified separations to a maximum of eight. Each time a DD name is the object of a separation request, it assumes an implied separation from the requesting DD statement. Thus, if a DD statement was referenced in the SEP parameter in a following DD statement, the referenced DD statement would be allowed to specify up to seven separations.

When you make a specific volume request for a data set and request unit separation for that data set, the system issues a message to the operator if the request for unit separation cannot be satisfied. The operator decides if the system should wait for devices to become available, or if the request for unit separation should be ignored, or if the job should be cancelled. When you make a nonspecific volume request for a data set and request unit separation for that data set, the request may be ignored, depending on how many disk drives are available and how much space is available on those disk drives. If

there is not a sufficient number of devices to satisfy the separation request, it will be ignored and no message will be issued. If the separation request cannot be satisfied because of insufficient space on a volume(s), a message will be issued giving the operator the option to wait for available devices, cancel the job, or ignore unit separation.

Unit Affinity

To conserve the number of devices used in a job step, you can request that an existing data set be assigned to the same device or devices as assigned to a data set defined earlier in the job step. When two data sets are assigned the same device, the data sets are said to have unit affinity. When the data sets reside on different volumes, unit affinity implies deferred mounting for one of the volumes, since both volumes cannot be mounted on the same device at the same time. Unit affinity is invalid if coded for a new direct access data set, except when an explicit volume reference is made. When a volume which is assigned to that device becomes private, all subsequent volumes assigned to that device through UNIT=AFF=ddname also become private.

You request unit affinity by coding UNIT=AFF=ddname on a DD statement. The ddname is the name of an earlier DD statement in the same job step, and the system obtains unit information from this statement. The data set defined on the DD statement that requests unit affinity is assigned the same device or devices as the data set defined on the named DD statement. If the ddname refers to a DD statement that defines a dummy data set, the data set defined on the DD statement requesting unit affinity is assigned a dummy status.

When unit affinity is requested for two data sets that reside on different 2321 volumes, the data sets are assigned the same device but may be assigned different bins. If the data sets are assigned different bins, the implied deferred mounting is ignored.

Examples of the UNIT Parameter

1. //DD1 DD DSNAME=AAG3,DISP=(,KEEP),
// VOLUME=SER=13230,UNIT=2400

X

This DD statement defines a new data set and requests the system to assign any 2400 9-track tape drive to the data set. If a 2400 9-track tape drive is not available, the system will assign a 3400-4 type tape.drive.

2. //DYD DD DSNAME=AAG4, DISP=OLD, VOLUME=SER=12345, UNIT=3400-3

This DD statement defines an existing data set that resides on a tape volume and requests the system to assign a 3400 9-track 1600 bpi tape device to the data set.

3. //DD2 DD DSNAME=X.Y.Z,DISP=OLD,UNIT=(,2)

This DD statement defines a cataloged data set and requests the system to assign two devices to the data set. The device type is obtained from the catalog.

4. //DD3 DD DSNAME=COLLECT, DIS P=OLD,
// VOLUME=SER=1095, UNIT=(DISK,, DEFER)

X

This DD statement defines an existing data set that resides on a direct access volume and requests the system to assign any device that is part of the group named DISK. Since DEFER is coded, the volume is not mounted until the data set is opened.

```
5. //STEP1 EXEC PGM=XTRA

//DDA DD UNIT=2311,SPACE=(1024,(150,20))

//DDB DD UNIT=2311,SPACE=(1024,(100,10))

//DDC DD UNIT=(2311,SEP=(DDA,DDB)),SPACE=(2048,(300,30))
```

The DD statements in this job step define temporary data sets. The DD statement named DDC requests the system to assign the data set to a different device than is assigned to either of the data sets defined on the DD statements named DDA and DDB.

```
//STEP 2
          EXEC PGM=POINT
//DDX
           DD
                DSNAME=EST, DISP=MOD, VOLUME=SER=(42569, 42570),
                                                                      X
//
                UNIT=(2311,2)
//DDY
                DSNAME=ERAS, DISP=OLD, UNIT=2400-2
           DD
//DDZ
                DSNAME=RECK, DISP=OLD,
          DD
                                                                      X
//
                VOLUME=SER=(40653, 13262), UNIT=AFF=DDX
```

The DD statement named DDZ requests that the system assign the same unit to this data set as it assigns to the data set defined on the statement named DDX. Since DDX requests two devices, these two devices are assigned to the data set defined on DDZ.

The **VOLUME** Parameter

PRIVATE

indicates that no output data set can be allocated to this volume unless the volume is specifically requested, and the volume is to be demounted after its last use in the job step, unless RETAIN is coded or the data set is passed.

, RETAIN

indicates that this volume is not to be demounted after its last use in the job step.

- indicates that the volume need not be retained after the job step and the volume sequence number or volume count subparameter follows.
 - ,volume sequence number specifies which volume of an existing multivolume data set you want to begin processing with.
- indicates that you want to begin processing of an existing multivolume data set with the first volume, and the volume count subparameter follows.

, volume count

specifies the maximum number of volumes an output data set requires.

specifies that either the SER or REF subparameter follows and one or more subparameters precede it.

SER=

indicates that the serial numbers of the volumes on which the data set resides or will reside follow.

(serial number,...)

the serial numbers of the volumes on which the data set resides or will reside.

REF=

indicates that the serial numbers of the volumes on which the data set resides or will reside are identified on an earlier DD statement in the job or in the catalog.

dsname

the name of a cataloged or passed data set. The system locates the information about the data set and assigns your data set to the same volumes as are assigned to the cataloged or passed data set.

* ddname

specifies that the system must obtain the volume serial numbers from an earlier DD statement named "ddname" in the same job step.

*.stepname.ddname

specifies that the system must obtain the volume serial numbers from a DD statement named "ddname," which was defined in an earlier job step named "stepname."

*.stepname.procstepname.ddname
specifies that the system must obtain the volume serial numbers from
a DD statement named "ddname," which was defined in an earlier
procedure step named "procstepname"; the procedure step is part of a
procedure that was called by an earlier job step named "stepname."

Rules for Coding

- 1. The volume sequence number subparameter can be 1 to 3 digits.
- 2. The volume count subparameter is a number from 1 through 255.
- If the only subparameter you are coding is PRIVATE, you need not enclose it in parentheses.
- 4. If the only subparameter you are coding is SER or REF, code VOLUME=SER=(serial number,...) or VOLUME=REF=reference.
- 5. If the list of volume serial numbers consists of only one serial number, you need not enclose the serial number in parentheses.
- 6. The VOLUME, DDNAME, and SYSOUT parameters are mutually exclusive parameters; therefore, if DDNAME or SYSOUT is coded, do not code the VOLUME parameter.
- 7. When coding a volume reference to a direct access data set defined in the same step, and the data set status of the referencing DD statement is old, the referenced DD statement must contain a specific volume request.

Providing Volume Information

A volume can be a tape reel, a disk pack, a data cell, a drum, or part of an IBM 2302 Disk Storage device served by one access mechanism. The VOLUME parameter provides information about the volume or volumes on which an input data set resides or on which an output data set will reside.

Before a data set can be read or written, the volume on which the data set resides or will reside must be mounted. For an existing data set, you must identify the volume or volumes on which the data set resides by making a specific volume request. For a new data set, you can make a specific volume request or let the system select a volume for you by making a nonspecific volume request.

Specific Volume Request

A specific volume request informs the system of the volume's serial number. Any of the following implies a specific volume request:

- The data set is passed from an earlier step or is cataloged.
- 2. VOLUME=SER=serial number is coded on the DD statement.
- VOLUME=REF=reference is coded on the DD statement, referring to an earlier specific volume request.

When you make a specific volume request, you can code the PRIVATE subparameter or the PRIVATE and RETAIN subparameters in the VOLUME parameter. For passed data sets, you can also code the volume count subparameter. For cataloged data sets, you can also code the sequence number and volume count subparameters.

Nonspecific Volume Request

A nonspecific volume request can be made only if you are defining a new data set. When you make a nonspecific volume request, the system may assign your data set to a volume that is already mounted or may cause a volume to be mounted. What the system does depends on the volume state of the volumes that are already mounted. The volume states that mounted volumes can assume and how they affect volume selection are described under "Volume States" at the end of this chapter.

When you make a nonspecific volume request, you can code the PRIVATE subparameter, or the PRIVATE and RETAIN subparameters, and the volume count subparameter in the VOLUME parameter. You should not code the volume sequence number subparameter when you make a nonspecific volume request.

THE PRIVATE SUBPARAMETER

When you make a specific or nonspecific volume request, you can code PRIVATE as the first subparameter in the VOLUME parameter. The volume assigned is called a private volume. This private volume cannot then be assigned to any other data set for which a nonspecific volume request is made. In addition, a private volume is demounted after its last use in the job step unless RETAIN or PASS is coded or the volume is a permanently resident or reserved volume. (Permanently resident and reserved volumes are described under "Volume States" at the end of this chapter.)

If PRIVATE is the only subparameter coded in the VOLUME parameter, you need not enclose it in parentheses.

When PRIVATE Is Not Coded

What occurs when PRIVATE is not coded depends on the type of volume request and whether a direct access or tape device is requested.

<u>Specific request for a direct access volume</u>: If PRIVATE is not coded and you make a specific request for a direct access volume, the volume assigned is called a public volume. A public volume remains mounted after its last use in a step so that it can be used again without the need to remount it.

Nonspecific request for a direct access volume: If PRIVATE is not coded and you make a nonspecific request for a direct access volume and the data set is temporary, the system assigns a volume called a public volume. If PRIVATE is not coded and you make a nonspecific request for a direct access volume and the data set is nontemporary, the system assigns a volume called a storage volume. Public and storage volumes remain mounted after their last use in a step so that they can be used again without the need to remount them. If it is possible that the data set may require more space than was requested for it, request more than one volume in the volume count subparameter of the VOLUME parameter and more than one device in the unit count subparameter of the UNIT parameter.

<u>Specific request for a tape volume</u>: If PRIVATE is not coded and you make a specific request for a tape volume, the system treats it as a request for a private volume. (How this affects the volume is described in the previous topic "The PRIVATE Subparameter.")

Nonspecific request for a tape volume: If PRIVATE is not coded and you make a nonspecific request for a tape volume and the data set is nontemporary, the system treats it as a request for a private volume. (As mentioned earlier, the system always considers certain requests to

be specific. For tape volumes, the system also considers the following to be a specific request: a status of OLD or SHR and a disposition of other than DELETE coded in the DISP parameter.) How a request for a private volume affects the volume is described in the previous topic "The PRIVATE Subparameter."

If PRIVATE is not coded and you make a nonspecific request for a tape volume and the data set is <u>temporary</u>, the system assigns a volume called a scratch volume. A scratch volume remains mounted after its last use in a step so that it can be assigned again without the need to remount it. If it is possible that the data set may exceed one volume, request more than one volume in the volume count subparameter of the VOLUME parameter and more than one device in the unit count subparameter of the UNIT parameter.

When PRIVATE is not coded, and the volume sequence number or volume count subparameter is coded, you must code a comma to indicate the absence of PRIVATE.

THE RETAIN SUBPARAMETER

If you have coded PRIVATE as the first subparameter in the VOLUME parameter, you may want to code RETAIN as the second subparameter. RETAIN overrides the system action of demounting a private volume after its use in a job step. For a tape volume, the volume remains mounted until after it is used in a subsequent step or until the end of the job, whichever occurs first. For volumes other than tape, the volume remains mounted until the end of the job. If the data set resides on more than one volume and the volumes are mounted in sequential order, only the last volume is retained.

The RETAIN subparameter need not be coded when the data set is to be passed; the system automatically retains the volumes on which the data set resides.

If the RETAIN subparameter is not coded and the volume sequence number or volume count subparameter follows, code a comma to indicate the absence of RETAIN.

THE VOLUME SEQUENCE NUMBER SUBPARAMETER

When you are reading or lengthening an existing multivolume data set, you can begin processing with other than the first volume of the data set by coding a volume sequence number. The sequence number must be less than or equal to the number of volumes on which the data set exists and can range from 1 to 4 digits. A volume sequence number is normally coded when volume serial numbers are not specified on the DD statement (i.e., you are retrieving a cataloged data set or VOLUME=(,,seq#,REF=reference) is coded). If both a volume sequence number and volume serial numbers are coded in the VOLUME parameter, you will begin processing with the volume that corresponds with the volume sequence number.

The volume sequence number is a positional subparameter and must follow the PRIVATE and RETAIN subparameters or the commas that indicate their absence. If the volume sequence number subparameter is not coded and the volume count subparameter follows, code a comma to indicate the absence of a sequence number.

If a volume sequence number is used with a nonspecific volume request, the results are unpredictable.

THE VOLUME COUNT SUBPARAMETER

The volume count subparameter tells the system the maximum number of volumes an output data set may require. If a volume count of 1 to 5 is specified, the maximum number is five; if a count of 6 to 15 is specified, the maximum number is 15. If a volume count above 15 is specified, the actual maximum number allowed will be a multiple of 15 up to an absolute maximum of 255. The total number for all the DD statements in one job step cannot exceed 4095.

When you make a nonspecific volume request and the data set may exceed one volume, request more than one volume in the volume count subparameter and code PRIVATE or request the same number of devices as volumes. If the volume(s) you initially specified is demountable, the system will request scratch volumes to be mounted until either the data set is complete or all entries in the JFCB are filled. If the JFCB entries are already filled, or the volumes are not demountable, the job step will abnormally terminate. When you request a non-specific tape volume for a data set with no labels, the system assigns the volume serial numbers required for the data set. If a volume count greater than 99 is specified, duplicate volume serial numbers are assigned.

When you make a specific volume request and the data set may require use of more volumes than there are serial numbers, specify in the volume count subparameter the total number of volumes that may be used. By requesting multiple volumes in the volume count subparameter, you can ensure that the data set can be written on more than one volume if it exceeds one volume.

If you make a nonspecific volume request and the volume count exceeds the number of direct access devices requested in the UNIT parameter, you should code PRIVATE, e.g.,
UNIT=(2311,4), VOLUME=(PRIVATE,,,6). When PRIVATE is coded and all the mounted volumes are used, the system demounts one of the volumes and then mounts another volume in its place so that processing can continue. When PRIVATE is not coded and all the mounted volumes are used, the system does not demount any of the volumes; therefore, the job step abnormally terminates. For tape devices, the PRIVATE subparameter is unnecessary; additional volumes are mounted as they are required.

The volume count subparameter is a positional subparameter. If you omit this subparameter, you code a comma to indicate its absence only if PRIVATE, RETAIN, or the volume sequence number subparameter is coded and the SER or REF subparameter follows.

SUPPLYING VOLUME SERIAL NUMBERS (SER)

To retrieve an existing data set, other than a cataloged or passed data set, you must supply the system with the serial numbers of the volumes on which the data set resides. When you are creating a data set, you can supply the system with the serial numbers of the volumes on which the data set will reside or let the system assign volumes to the data set. One of the ways to supply the system with serial numbers is to code the serial numbers on the DD statement. You can specify a maximum of 255 volume serial numbers per DD statement and a maximum of 4095 volume serial numbers per job step.

A volume serial number must be 1 to 6 characters in length. If volume serial number is not 6 characters, it will be padded with trailing blanks. It can contain any alphameric and national (#,\$,a) characters, and the hyphen. You must enclose any volume serial number that includes special characters, other than a hyphen, in apostrophes whenever you code that number in the VOLUME parameter. When using

various typewriter heads or printer chains, difficulties in volume serial recognition may arise if you use other than alphameric characters. Each volume at an installation should have a different serial number regardless of the volume type, e.g., tape, disk; the volume's serial number should be posted on the outside of the volume.

The SER subparameter appears as the last subparameter in the VOLUME parameter. Follow SER= with the volume serial numbers. The serial numbers must be enclosed in parentheses, unless there is only one serial number. If SER is the only subparameter you are coding, you can code VOLUME=SER=(serial number,...) or VOLUME=SER=serial number.

SCRTCH should not be used as a volume serial number, because it is used to notify the operator to mount a non-specific volume. For Optical Readers, if no volume serial number is specified, VOLUME=SER=OCRINP is assumed.

REFERRING THE SYSTEM TO AN EARLIER SPECIFIC VOLUME REQUEST (REF)

Another way to supply the system with volume serial numbers is to refer the system to either a cataloged data set or a data set that is defined earlier in the job. When you do this, the system obtains volume information, including volume serial numbers, the label type field, and unit information from the source you refer it to. For Direct Access devices the label type is obtained from the label parameter specified in the DD statement and not from the source you refer it to. When using VOI=REF reference to a previous DD statement that uses esoteric names, the system will allocate to generic, rather than esoteric, names.

To refer the system to a cataloged data set or to a data set passed earlier in the job that has not been assigned a temporary data set name, you code REF as the last subparameter in the VOLUME parameter. Follow REF= with the data set name of the cataloged or passed data set. The data set name you code cannot contain special characters, except for periods used in a qualified name.

To refer the system to a data set defined earlier in the job that was not passed or was passed but assigned a temporary name, you code REF= as the last subparameter in the VOLUME parameter. Follow REF= with a backward reference to the DD statement that contains the volume serial numbers. This backward reference must be one of the following:

- 1. *.ddname. Use this form of backward reference when the DD statement you are referring to is contained in the same job step.
- *.stepname.ddname. Use this form of backward reference when the DD statement you are referring to is contained in an earlier job step.
- 3. *.stepname.procstepname.ddname. Use this form of backward reference when the DD statement you are referring to is contained in a cataloged procedure step that is part of a procedure called by an earlier job step.

In any case, if the ddname refers to a DD statement that defines a dummy data set, the DD statement requesting use of the volumes assigned to that data set is assigned a dummy status.

When you refer the system to a data set that resides on more than one tape volume, the system assigns only the last volume. When you refer the system to a data set that resides on more than one direct access volume, the system assigns all of the volumes. In either case, you can code the volume count subparameter if additional volumes may be required.

If REF is the only subparameter you are coding, you can code VOLUME=REF=reference.

Volume Affinity

Two or more data sets sharing the same volume have volume affinity. This occurs when you specify the same volume serial numbers for the data sets, or when you use the REF subparameter of the VOLUME parameter to indicate that volumes identified in the catalog or on an earlier DD statement in the job are to be assigned to the data set being defined. Volume affinity influences device allocation. The system may ignore a request for a specific number of units if a data set has volume affinity with at least one other data set. The system will allocate devices as follows:

situation: The volume or volumes requested for a data set are shared.

The device requested is not a tape unit.

The data sets sharing volumes do not request unit

affinity.

allocation: The system ignores any request for a specific number of

units and allocates one device for each shared volume.

example: Two data sets share three volumes:

//UN DD UNIT=SYSDA, DSN=ANN, VOL=SER=(AA, BB, CC)
//DEUX DD UNIT=SYSDA, DSN=JOHN, VOL=SER=(AA, BB, CC)

Three devices are allocated to the data set defined by UN.

The same three devices are allocated to the data set

defined by DEUX.

situation: Some of the volumes requested for a data set are shared.

The UNIT parameter requests more devices than the number

of shared volumes.

The device requested is not a tape unit.

The data sets sharing volumes do not request unit

affinity.

allocation: The system allocates the number of units requested in the

UNIT parameter.

example: Two data sets share one volume:

//TROIS DD UNIT=(SYSDA, 3), DSN=CYNDY, VOL=SER-(AA, BB, CC)

//QUATRE DD DSN=BERT, VOL=SER=BB

The UNIT parameter of TROIS requests 3 units; only one of the volumes requested by TROIS is shared. The system honors the unit request and allocates 3 advices to the

data set defined by TROIS. The system allocated one

device to the data set defined by QUATRE.

situation: Some of the volumes requested by a data set are shared.

The number of units requested for the data set is equal

to or less than the number of shared volumes (or no request for a specific number of units is made).

The device requested is not a tape unit.

The DD statements sharing volumes do not request unit

affinity.

allocation: The system will allocate one device for each shared volume

plus one additional device.

example: Two data sets share three volumes:

//CINQ DD DSN=ALL,UNIT=(SYSDA,3),VOL=SER=(AA,BB,CC,DD,EE)

//SIX DD DSN=JANE, VOL=SER=(BB,DD,EE)

The system ignores the request for three devices made in the UNIT parameter of CINQ and allocates four devices -one for each shared volume plus one additional device.

Three devices are allocated to the data set defined by SIX.

situation: Two data sets share at least one volume.

The device requested is a tape unit.

One of the data sets requests unit affinity with the

other data set.

allocation: The system will assign the number of units requested in

the UNIT parameter. If no request for a specific number

of units is made, the system assumes 1.

example: Two data sets share three volumes:

//SEPT DD UNIT=(2400,2), DSN=JAN, VOL=SER=(VOL1,

VOL2, VOL3)

//HUIT DD UNIT=AFF=SEPT, DSN=MARTY,

VOL=SER=(VOL1, VOL2, VOL3, VOL4)

The system allocates two devices to the data set defined by SEPT, and the same two devices to the data set defined by HUIT.

<u>Note</u>: If you code duplicate serial numbers in the VOLUME parameter, the system will treat that volume as a shared volume, and will allocate devices to the data set according to the above considerations.

Volume States

Every mounted volume is assigned several attributes by the system. The attributes assigned to a mounted volume define the state of the volume; the volume state controls when a volume is demounted and controls volume sharing. Volume sharing is the allocation of a volume to two or more data sets defined in the same job step, or the allocation of a direct access volume to two or more data sets defined in different job steps that are executing concurrently.

The attributes that are assigned both to a tape or direct access volume are the mount attribute and the use attribute. The nonsharable attribute can also be assigned to a direct access volume. These attributes are described in the next two topics.

THE MOUNT AND USE ATTRIBUTES

Every volume is assigned a mount and use attribute. The mount attribute controls volume demounting. The use attribute is one of the factors that controls allocation of mounted volumes to data sets. The mount and use attributes are:

Mount	Use
Permanently resident Reserved Removable	Public Private Storage Scratch

The following lists the mount attributes and describes how this attribute and a use attribute are assigned to a volume.

- 1. <u>Permanently resident</u> volumes cannot be demounted. Only direct access volumes can be permanently resident. While all direct access volumes can be designated as permanently resident in a special member of SYS1.PARMLIB named PRESRES, the following volumes are always permanently resident:
 - All volumes that cannot be physically demounted, such as a 2301 Drum Storage volume.
 - The volume from which the system is loaded (the IPL volume).
 - The volume containing the system data sets SYS1.LINKLIB, SYS1.PROCLIB, and SYS1.SYSJOBQE.

A permanently resident volume can be assigned the use attribute of public, private, or storage. The use attribute is assigned to the volume in the PRESRES member in SYS1.PARMLIB, or is public by default.

2. Reserved volumes remain mounted until an UNLOAD command is issued. Both direct access and tape volumes can be reserved volumes. A volume becomes reserved as a result of a MOUNT command or a PRESRES entry. A volume is usually designated as a reserved volume to avoid repeated mounting and demounting of the volume when it is to be used by a group of related jobs.

A reserved <u>direct access</u> volume can be assigned the use attribute of public, private, or storage. The use attribute is assigned to the volume either in the PRESRES member in SYS1.PARMLIB or in a parameter of the MOUNT command, depending on how the volume becomes reserved.

A reserved <u>tape</u> volume is always assigned the use attribute of private.

3. Removable volumes are those volumes that are neither permanently resident nor reserved. Removable volumes are demounted either after their last use in a job step or when the unit on which the volume is mounted is required for another volume. Which occurs depends on the use attribute assigned to the volume.

A removable <u>direct access</u> volume can be assigned the use attribute of public or <u>private</u>. The use attribute of public is assigned when the PRIVATE subparameter is not coded. The use attribute of <u>private</u> is assigned when the PRIVATE subparameter is coded.

A removable <u>tape</u> volume can be assigned the use attribute of scratch or private. The use attribute of scratch is assigned when the PRIVATE subparameter is not coded, a nonspecific volume request is made, and the data set is temporary. The use attribute of private is assigned when the PRIVATE subparameter is coded, a specific volume request is made, or the data set is nontemporary.

Note: If, when you make a nonspecific volume request for a tape with IBM standard labels, the system allocates a device containing a ready tape, the system will assume it is a scratch tape and use it. This tape could be available for the following reasons:

- The tape was left mounted as a scratch tape by another job because the disposition specified for the data set on that tape was DELETE.
- The tape had been requested by another job, but the job terminated before the tape became ready. As a result, no message to demount the tape was sent to the operator. This situation can be avoided by coding DEFER in the UNIT parameter to defer mounting of the volume until the processing program attempts to open the data set.

Figure 25 summarizes what type of volume can be assigned when you make a specific or nonspecific volume request for a temporary or nontemporary data set, how these attributes are assigned, and how the volume is demounted.

r	r		r		
	Temporary Data Set	Nontemporary Data Set		How	
Volume State	Type of Vol	Lume Request	How Assigned	Demounted	
Public/ Permanently Resident ¹	Nonspecific or Specific		PRESRES Entry or by default	Always mounted	
Private/ Permanently Resident¹	Specific	Specific	PRESRES Entry	Always mounted	
Storage/ Permanently Resident ¹		Nonspecific or Specific	PRESRES Entry	Always mounted	
Public/ Reserved ¹	Nonspecific or Specific		PRESRES Entry or MOUNT command	UNLOAD command	
Private/ Reserved (Tape and direct access)	Specific	Specific	PRESRES Entry or MOUNT command (Only MOUNT commend for tape.)	UNLOAD command	
Storage/ Reserved1		Nonspecific or Specific	PRESRES Entry or MOUNT command	UNLOAD command	
Public/ Removable¹	Nonspecific or Specific		VOLUME=PRIVATE is <u>not</u> coded on the DD statement	When unit is required by another volume.	
Private/ Removable (Tape and direct access)	Specific	Specific	VOLUME=PRIVATE is coded on the DD statement (Specific request or a nontemporary data set for tape also causes this assignment.)	After its use, unless RETAIN or PASS is coded, in which case, volume demounted at job termination	
Scratch (Tape only)			Any tape data set (Scratch volume becomes private if VOLUME=PRIVATE is coded, specific request is made, or data set is nontemporary.)	When unit is required by another volume.	
Direct access volumes only.					

Figure 25. Combinations of Mount and Use Attributes

NONSHARABLE ATTRIBUTE

The nonsharable attribute is assigned by the system to direct access volumes that may require demounting during execution of the step that requested the volume. When a volume is assigned the nonsharable attribute, the volume cannot be assigned to a data set defined in the same step for which a nonspecific request is made or to any data set defined in another step that is being executed concurrently.

The nonsharable attribute is never assigned to a permanently resident or reserved volume or to a volume that was mounted to satisfy a nonspecific request for a public volume. Except for these cases just described, the nonsharable attribute is always assigned to a volume when the following occurs:

- You make a specific volume request and request more volumes than devices.
- You request unit affinity with an earlier data set defined in the job step. (The data sets must reside upon different volumes.)
- You request deferred mounting of the volume on which the data set resides.
- 4. You make a nonspecific request for a private volume.

SATISFYING SPECIFIC VOLUME REQUESTS

In the following cases the system can satisfy a request for a specific volume that is already mounted:

- The volume is permanently resident or reserved. The use attribute of the volume does not affect assignment of the volume and the use attribute is not changed.
- 2. The direct access volume is a removable volume that has not been assigned the nonsharable attribute and is being used by a concurrently executing step. (If your request would make the volume nonsharable, the system waits to assign you that volume until all other job steps using the volume have terminated.) The volume remains private if its use attribute is private. The volume becomes private if the use attribute is public and the request is for a private volume. The volume remains public if its use attribute is public and the request is for a public and the request is for a public volume.
- 3. The direct access volume is a removable public volume and is not in use. The use attribute (private or public) assigned to the volume when it is allocated is determined by the presence or absence of the PRIVATE subparameter.
- 4. The tape volume is a scratch volume and is not in use. The use attribute of private is assigned to the volume.

SATISFYING NONSPECIFIC VOLUME REQUESTS

There are four types of nonspecific volume requests that can be made:

- 1. You can request a private volume for a temporary data set.
- 2. You can request a private volume for a nontemporary data set.

- 3. You can request a public volume for a temporary data set.
- 4. You can request a storage volume for a nontemporary data set.

How the system satisfies these different types of requests are described below. Since the system satisfied the first two types of requests in the same way, these two requests are described together.

- 1. When you make a nonspecific volume request for a private direct access or tape volume, the system assigns a volume that is mounted but not in use or requests the operator to mount a volume. The operator should mount a volume whose space is unused. This allows you to have control over all space on the volume. Once mounted, the volume is assigned the use attribute of private.
- When you make a nonspecific volume request for a public <u>direct access</u> volume that is to contain a temporary data set, the system assigns a public or storage volume that is already mounted, or requests the operator to mount a removable volume. If a mounted volume is selected, its use attribute is not affected. If a removable volume is mounted, it is assigned the use attribute of public.

When you make a nonspecific volume request for a public <u>tape</u> volume that is to contain a temporary data set, the system assigns a scratch volume that is already mounted, or it requests the operator to mount a tape volume. Once mounted, the volume is assigned the use attribute of scratch.

3. When you make a nonspecific volume request for a public <u>direct</u> <u>access</u> volume that is to contain a nontemporary data set, the system assigns a storage volume if one is mounted. Otherwise, the request is treated as a nonspecific volume request for a private volume.

When you make a nonspecific volume request for a public <u>tape</u> volume that is to contain a nontemporary data set, the request is treated as a nonspecific volume request for a private volume.

Examples of the VOLUME Parameter

1. //DD1 DD DSNAME=STEP, UNIT=2311, DISP=OLD, VOLUME=(PRIVATE,,,SER=548863)

X

This DD statement defines an existing data set and informs the system that the data set resides on the volume whose serial number is 548863. Since PRIVATE is coded in the VOLUME parameter, the system will not assign the volume to any data set for which a nonspecific volume request is made and will cause the volume to be demounted after its use in the job step.

2. //DDB DD DSNAME=COMM, DISP=(NEW, KEEP), SPACE=(CYL, (30,2)), X
// VOLUME=(PRIVATE,,,2), UNIT=2311

The DD statement named DDB defines a new data set for which the system is to assign a volume. Since only one device is requested (UNIT=2311) and the volume count is 2, PRIVATE is coded to ensure that the additional volume can be mounted if required.

DD

3. //DD2 DD DSNAME=QUET,DISP=(MOD,KEEP),UNIT=(2400,2),
// VOLUME=(,,,4,SER=(96341,96342))

This DD statement defines an existing data set, which resides on the volumes whose serial numbers are 96341 and 96342, and requests that a total of 4 volumes be used to process the data set if required.

4. //DD3 DD DSNAME=&OUT,DISP=NEW,UNIT=2400

This DD statement defines a temporary data set and, by omission of the VOLUME parameter, requests the system to assign a suitable volume to the data set.

Device	Parameter Type	Parameter	Comments
Unit	Location of the Data Set	UNIT	Required
Record Devices	Data Attributes	DCB	Optional
	Special Processing Options	ucs	Optional (for a printer with the universal character set feature)
		FCB	Optional (for 3211 printer if forms control information is to be specified)
		DUMMY	Optional
System	Location of the Data Set	SYSOUT	Required. Specifies the output class
Output Devices		UNIT	Optional
	Size of the Data Set	SPACE	Optional
	Data Attributes	DCB	Optional
	Special Processing Option	OUTLIM	Optional. Meaningful only for Systems that have the Systems Management Facilities Option
Magnetic Tape	Data Information	DSNAME (or DSN)	Required if the data set is to be cataloged or used by a later job
		DISP	Required if the data set is to be cataloged, used by a later step in this job, or used by another job
	Location of the Data Set	UNIT	Required unless you request (with the VOLUME parameter) the same volume used for an earlier data set in your job
		VOLUME (or VOL)	Required if you want a specific volume. If you do not use this parameter you get a scratch tape
		LABEL	Required if you do not want to use IBM standard labels for the data set
	Data Attributes	DCB	Optional
	Special Processing Options	SEP	Either parameter can be used
		AFF	
		DUMMY	Optional
Direct Access	Data Set Information	DSNAME (or DSN)	Required if the data set is to be cataloged or used by a later job
Devices		DISP	Required if the data set is to be cataloged, used by a later step in this job, or used by another job
	Location of the Data Set	UNIT	Required unless you request (with the VOLUME parameter) the same volume used for an earlier data set in your job, or unless you use the SPLIT or SUBALLOC parameters to allocate space to this data set
		VOLUME (or VOL)	Required if you want a specific volume or multiple volumes. If you do not use this parameter your data set will be allocated on any suitable volume
		LABEL	Required if you want the data set to have both IBM standard and user labels
	Size of the Data Set	SPACE	One of these parameters is required. SPLIT can only be used for BSAM or
		SPLIT	QSAM data sets. SPACE must be used for ISAM data sets
		SUBALLOC	
	Data Attributes	DCB	Optional, Required for BDAM and ISAM data sets
	Special Processing Options	SEP	Either parameter can be used
		AFF	
		DUMMY	Optional
		DYNAM	Optional. Meaningful only for systems with MVT and TSO

Figure 26. Parameters for Creating A Data Set

SUMMARY

The following figures summarize the DD statement parameters required to perform these functions:

•	Create a data set on an unit record device	
-	(card punch or printer)	Figure 27
•	Create a data set on a system output device	Figure 28
•	Create a data set on magnetic tape	Figure 29
•	Create a data set on a direct access device	Figure 30
•	Retrieve a data set from an unit record device (card reader or paper tape reader)	Figure 31
•	Retrieve a data set from the input stream	Figure 32
•	Retrieve a passed data set (magnetic tape or direct access)	Figure 33
•	Retrieve a cataloged data set (magnetic tape or direct access)	Figure 34
•	Retrieve a kept data set (magnetic tape or direct access)	Figure 35
•	Extend a passed data set (magnetic tape or direct access)	Figure 36
•	Extend a cataloged data set (magnetic tape or direct access)	Figure 37
•	Extend a kept data set (magnetic tape or direct access)	Figure 38
•	Postpone definition of a data set	Figure 39

Parameter Type	Parameter	Format
Location of the Data Set 	UNIT	(unit address) 1052 1403 1442 UNIT= 1443 2520 2540-2 3211 group name
Data Attributes 	DCB	DCB=(list of attributes) *.ddname DCB=(*.stepname.ddname *.stepname.procstepname.ddname) Note: See Figures 10 and 11 for attributes.
Special Processing Options	UCS	UCS=(code [,FOLD](,VERIFY])
 	FCB	[FCB=(image-id[,ALIGN])] [,VERIFY]
! 	DUMMY	[DUMMY] <u>Note</u> : Positional parameter

Figure 27. Creating a Data Set on a Unit Record Device (Card Punch or Printer)

Parameter Type	Parameter	Format
Location of the Data Set	SYSOUT 	SYSOUT=(classname program [, form number]) Note: "Classname" is a letter (A-Z) or a number (0-9)
 	UNIT	
Size of the Data Set	SPACE	
Data Attributes	DCB	
Special Processing Option	OUTLIM	OUTLIM=number <u>Note</u> : For systems with MFT or MVT that have the System Management Facilities option.

Figure 28. Creating a Data Set on a System Output Device

Parameter Type	Parameter	Format
Data Set Information	DSNAME and DISP	Temporary - for the duration of the job:
		DSNAME= {&&name }, DISP=(<u>NEW</u> , PASS <u>, DELETE</u>) &name }
<u> </u>		Temporary - for duration of the job step:
		DSNAME= {& & name } _DISP=(NEW, DELETE, DELETE)
	 	Nontemporary - cataloged:
		DSNAME=dsname,DISP=(<u>NEW</u> ,CATLG ,CATLG ,DELETE ,KEEP
	 	Nontemporary - kept:
		DSNAME=dsname,DISP=(<u>NEW</u> ,KEEP , <u>KEEP</u> , <u>DELETE</u> , CATIG
1		Nontemporary - member generation data group
	 	DSNAME=groupname(+number),DISP=(<u>NEW</u> ,CATLG ,CATLG ,DELETE)
 Location of the Data Set 	UNIT	unit address 2400 2400-1 UNIT=()2400-2 2400-3 2400-4 group name 3400
1 1	VOLUME	Nonspecific request - one scratch volume (temporary data set):
	! !	Omit
1	<u>.</u>	Nonspecific request - more than one scratch volumes (temporary data set):
	! 	VOLUME=(,,,volcount)
	1	Nonspecific request - private volume (temporary data set):
	İ	VOLUME=(PRIVATE[,,,volcount])
	!	Nonspecific request - private volume (nontemporary data set):
		VOLUME=([PRIVATE, RETAIN] [,, volcount])
		Specific request - private volume (request by serial number): VOLUME=([PRIVATE,RETAIN] [,,volcount,] SER=(serial,))

Figure 29. Creating a Data Set on a Magnetic Tape (Part 1 of 2)

Parameter Type	Parameter	Format
Location of the Date Set (cont.)	VOLUME (cont.)	Specific request - private volumes used by other data set):
		VOLUME=([PRIVATE,RETAIN][,,volcount,], dsname **.ddname **.stepname.ddname **.stepname.procstepname.ddname
	LABEL	LABEL=([sequence]
Data Attributes	DCB	DCB=(list of attributes) (*.ddname
Special Processing	SEP or AFF	SEP=(ddname,) AFF=ddname
Options 	DUMMY	[DUMMY] Note: Positional parameter

Figure 29. Creating a Data Set on Magnetic Tape (Part 2 of 2)

Parameter Type	Parameter	Format
Data Set Information	DSNAME and	Temporary - for the duration of the job:
	DISP 	Stname Stname Carlo Ca
Í		Temporary - for the duration of the job step:
	! ! ! !	DSNAME= & & name & & name & & name & & name & & name (member name) & & name (member name) & name (
ļ		Nontemporary - cataloged:
	! 	dsname (membername) , DISP=(NEW, CATLG , CATLG , DELETE , KEEP)
!	! !	Nontemporary - kept:
 	 	DSNAME={dsname DISP=(NEW, KEEP KEEP DELETE DELETE CATLG DELETE CATLG DELETE CATLG DELETE CATLG DELETE CATLG DELETE
	!	Nontemporary - member generation data group:
! ! !	 	DSNAME=groupname(+number), DISP=(<u>NEW</u> , CATLG
Location of the Data Set	UNIT	<pre>unit address 2301 2302 2303 2305-1 2305-2 2311 2314 2319 2321 3330 group name</pre> [,unitcount] [,SEP=(ddname,)])
 	 	Note: To indicate the 2319, specify UNIT=2314. To designate the 2319 as the particular device for your data set, specify UNIT=unit address.
 	OLUME	Nonspecific request - one public volume: Omit
! 	1	Nonspecific request - more than one public volumes: VOLUME=(,,,volcount)
	 	Nonspecific request - private volume: VOLUME=(PRIVATE [, RETAIN] [, volcount])
 	 	Specific request - public volume (request by serial number): VOLUME=([,,,volcount,]SER=(serial,))

Figure 30. Creating a Data Set on Direct Access Devices (Part 1 of 3)

Parameter Type	Parameter	Format
Location of the Data Set (cont.)	VOLUME (cont.)	Specific request - public volume (volumes used by other data set):
		dsname VOLUME=([,,,volcount,]REF= dsname *.stepname.ddname *.stepname.procstepname.ddname
		Specific request - private volume (request by serial number):
	 	VOLUME=(PRIVATE[,RETAIN][,,volcount,]SER=(serial,))
		Specific request - private volume (volumes used by other data set):
	 	VOLUME= (PRIVATE [, RETAIN] [,, volcount,]
	 	dsname *.ddname *.stepname.ddname *.stepname.procstepname.ddname
	LABEL	LABEL=([,SL,SUL][,PASSWORD][,IN][,][EXPDT=yyddd])]
Size of the Data Set	SPACE	The system assigns tracks:
(choose one)		SPACE=({TRK CYL CYL
	i I	
	 SPLIT	Units of cylinders:
		• First data set
	 	SPLIT=(n,CYL,(primary quantity [,secondary quantity]))
	 	Subsequent data sets
		SPLIT=n
	1 -	Units of blocks:
‡ [[• First data set
		SPLIT=(%,blocklength,(primary quantity[,secondary quantity]))
<u> </u> 	 	Subsequent data sets
	<u> </u>	SPLIT=%

Figure 30. Creating a Data Set on Direct Access Devices (Part 2 of 3)

Parameter Type	Parameter	Format
Size of the Data Set choose one) (cont.)	SUBALLOC	Reserved area: (TRK SPACE=({CYL blocklength}}, (primary quantity),, CONTIG) Suballocaed data sets: SUBALLOC=({CYL block length}}, (primary quantity secondary quantity block length) (ddname stepname.ddname stepname.ddname)
Data Attributes 	DCB	DCB=(list of attributes) dsname
Special Processing	SEP or	SEP=(ddname,) AFF=ddname
Options	DUMMY	[DUMMY] Note: Positional parameter
	DYNAM	[DYNAM] <u>Note</u> : Positional parameter

Figure 30. Creating a Data Set on Direct Access Devices (Part 3 of 3)

Parameter Type	Parameter	Format
Location of the Data Set 	UNIT 	
Data Attributes 	DCB	DCB=(list of attributes) (*.ddname DCB=(*.ddname.stepname (*.ddname.procstepname.ddname)
Special Processing Option	DUMMY	[DUMMY] Note: Positional parameter

Figure 31. Retrieving an Existing Data Set From a Unit Record Device (Card Reader or Paper Tape Reader)

Parameter Type	Parameter	Format
Location of the Data Set	+ or DATA	(* DATA)
Data Attributes	DCB	[DCB=([BLKSIZE=number of bytes][,][BUFNO=number of buffers])]
Special Processing Option	 DLM 	 DLM=delimiter

Figure 32. Retrieving A Data Set From the Input Stream

Parameter Type	Parameter	Format
Data Set Information	DS NAME	Retrieving by name:
		dsname dsname(membername) DSNAME= \$&name(membername) &&name(membername) & &name(membername) & &name(membername) & &name(membername) & &name(membername) & &nam
 	! ! !	(*.ddname DSNAME=(*.stepname.ddname *.stepname.procstepname.ddname)
	DISP	Passing the data set to a subsequent step:
	1 - 1 - 1 - 1	DISP=(OLD, PASS [, DELETE]) , CATIG , KEEP
		Last time a passed temporary data set is used in job:
		DISP=(OLD, DELETE, DELETE)
		Last time a passed nontemporary data set is used in job:
	 	DISP=(OLD , KEEP , DELETE , CATLG), CATLG
Location of the Data Set	UNIT	[UNIT=(,unitcount)]
	LABEL	LABEL= (,SUL), NL, NSL, ,NSL, ,BLP
Data Attributes 	DCB	DCB=(list of attributes) DCB=(*.ddname
i L		Note: See Figures 19, 20, 21, and 22 for attributes.
Special Processing Option	DUMMY	[DUMMY] Note: Positional parameter
L	<u> </u>	

Figure 33. Retrieving a Passed Data Set (Magnetic Tape or Direct Access)

Parameter Type	Parameter	Format
Data Set Information	DS NAME	dsname DSNAME= dsname(membername) groupname(number)
 	DISP	DISP=({OLD} [, UNCATLG] [, UNCATLG]) (SHR) [, DELETE]
Location of the Data Set	UNIT	Requesting units: UNIT=(,[unitcount][,DEFER]) P Unit affinity: [UNIT=AFF=ddname]
	VOLUME	VOLUME=([PRIVATE , RETAIN] [, sequence])
	LABEL	LABEL=(\(\frac{\text{SUL}}{\text{NL}}\), NSL\(\frac{\text{NSL}}{\text{BLP}}\), BLP\(\frac{\text{LTM}}{\text{LTM}}\)
Data Attributes 	DCB	DCB=(list of attributes) dsname
Special Processing Options	SEP or AFF	SEP=(ddname,) AFF=ddname
	DUMMY	[DUMMY] Note: Positional parameter

Figure 34. Retrieving a Cataloged Data Set (Magnatic Tape or Direct Access)

Parameter Type	Parameter	Format
Data Set Information	DSNAME	DSNAME={dsname dsname(membername)}
	DISP	DISP=({OLD} , KEEP , CATLG , CATLG , DELETE , DELETE)
Location of the Data Set	UNIT	Requesting units:
		UNIT=({device type } , unitcount] [,DEFER]) group name [, DEFER])
		<pre>Unit affinity: UNIT=AFF=ddname</pre>
	VOLUME	VOLUME=([PRIVATE] [,RETAIN] SER=(serial,))
	LABEL	LABEL=([sequence#], NSL), BLP, LTM
Data Attributes 	DCB	DCB=(list of attributes) dsname
Special Processing Options	SEP or	SEP=(ddname,) AFF=ddname
 	DUMMY	[DUMMY] Note: Positional parameter

Figure 35. Retrieving a Kept Data Set (Magnetic Tape or Direct Access)

Parameter Type	Parameter	Format
Data Set Information	DSNAME	Retrieving by name:
		dsname dsname(membername) DSNAME = &&name &&name(membername) &name &name(membername)
		Making a backward reference:
	! !	(*.ddname DSNAME= (*.stepname.ddname *.stepname.procstepname.ddname)
	DISP	Passing the data set to a subsequent step:
		DISP=(MOD, PASS[, DELETE]) ,CATALG ,KEEP
		last time a passed temporary data set is used in job:
		DISP=(MOD, DELETE, DELETE)
	! !	last time a passed nontemporary data set is used in job:
 		DISP=(MOD , KEEP , DELETE , CATLG , CATLG), CATLG
Location of the Data Set	UNIT	UNIT=([,unitcount][,DEFER]
	VOLUME)	[VOLUME=(,,,volcount)]
	LABEL	LABEL=((, SUL , NL , NSL ,), BLP , LTM
Size of the Data Set	SPACE	SPACE=({TRK CYL (1, secondary quantity), RLSE) block length }
Data Attributes	DCB	DCB=(list of attributes) *.ddname DCB= *.stepname.ddname *.stepname.procstepname.ddname *.stepname.procstepname.ddname
Special Processing Option	DUMMY	[DUMMY] Note: Positional parameter

Figure 36. Extending a Passed Data Set (Magnetic Tape or Direct Access)

Parameter Type	Parameter	Format
Data Set Information	DSNAME	{dsname DSNAME={dsname(membername)}
	DISP	DISP=(MOD , UNCATLG , UNCATLG), CATLG , CATLG , CATLG , CATLG
Location of the Data Set	UNIT	Requesting units:
	 	UNIT=(,[unitcount][,DEFER]) P Unit affinity:
		[UNIT=AFF=ddname]
	VOLUME	VOLUME=([PRIVATE[,RETAIN][,sequence#][,volcount])
	LABEL	LABEL=((, SUL)), NSL , NSL , BLP
Size of the Data Set	SPACE	SPACE=({CYL },(1,secondary quantity),RLSE) block length)
Data Attributes 	DCB	DCB=(list of attributes) dsname DCB=(*.ddname *.stepname.ddname *.stepname.procstepname.ddname *.stepname.ddname *.stepname.d
Special Processing	SEP or AFF	SEP=(ddname,) AFF=ddname
Options 	DUMMY	[DUMMY] Note: Positional parameter

Figure 37. Extending a Cataloged Data Set (Magnetic Tape or Direct Access)

Parameter Type	Parameter	Format
Data Set Information	DSNAME	DSNAME={dsname dsname(membername)}
	DISP 	DISP=(MOD , KEEP , CATLG , DELETE), DELETE)
Location of the Data Set	UNIT	<pre>Requesting units:</pre>
1 1 1	VOLUME	VOLUME=(PRIVATE[,RETAIN][,,volcount,]SER=(serial,))
	LABEL	LABEL=([sequence#] ,NL ,NSL ,BLP ,LTM]
Size of the Data Set	SPACE	SPACE=({TRK CYL (1, secondary quantity), RLSE) (block length)
Data Attributes 	DCB	DCB=(list of attributes) dsname
Special Processing Options	SEP Or AFF	SEP=(ddname,) AFF=ddname
	DUMMY	[DUMMY] Note: Positional parameter

Figure 38. Extending a Kept Data Set (Magnetic Tape or Direct Access)

Parameter Type	Parameter	Format
Special Processing Option	DDNAME	DDNAME=ddname
Data Attributes	DCB	[DCB=([BLKSIZE=number of bytes][,][BUFNO=number of buffers)]

Figure 39. Postponing Definition of a Data Set

Comman

Section V: The COMMAND Statement

commands are issued to communicate with and control the system. All commands may be issued to the system via the operator's console; some commands may be also issued via a command statement in the input stream. In most cases, the operator issues the command. If you include a command statement as part of your job control statements, the command is usually executed as soon as it is read. (Disposition of commands read from an input stream is specified as a PARM parameter field in the cataloged procedure for the input reader.) Since a command is usually executed as soon as it is read, it is not likely that the command will be synchronized with the execution of the job step to which it pertains. Therefore, you should tell the operator which commands you want issued and when they should be issued, and let him issue them.

A command statement may appear immediately before a JOB statement, an EXEC statement, a null statement, or another command statement.

The Command Statement Format

// command operand comments

The command statement consists of the characters // in columns 1 and 2_{σ} and three fields -- the operation (command), operand, and comments fields.

Rules for Coding

Code the command statement in the following order:

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80
1234567890	1234567890	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1234567890	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0
1.	1					المتباليين	

- 2. Follow // with one or more blanks.
- 3. Code the command.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80
1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890
11. DISPLAY		 		· 			

- 4. Follow the command with one or more blanks.
- 5. Code any required operands following the blank or blanks. Separate each operand with a comma.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80
1234567890	1234567890	1 2 3 4 5 6 7 8 9 0	1234567890	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1234567890	1 234567890
II. DISPLAY	JOBMANES.	T			La cara la cara	لتتنابين	

- 6. Follow the operands with one or more blanks.
- 7. Code any comments following the blank or blanks.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80
1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1 2 3 4 5 6 7 8 9 0
1.1. DISPLAY	JOBNAMES.	T. B. AKIN	REQUESTED	COMMAND BE	I.S.S.U.ED		

8. The command statement cannot be continued.

Commands That Can Be Entered Through the Input Stream

The commands that can be entered through the input stream in MFT or MVT are listed below, with a brief explanation of what each command requests the system to do. Most command statements consist of an operation (command) field and an operand field, which includes options associated with the command. The operand field is not described here; a complete discussion of the commands and operands is presented in the Operator's Guide publication.

MFT

In MFT, the following commands can be entered through the input stream.

<u>CANCEL</u>: The CANCEL command tells the system to immediately terminate the scheduling or execution of a job, to cancel a job on the queue, or to stop the writing of an output data set currently being processed by an output writer.

<u>DISPLAY</u>: The DISPLAY command causes a console display of certain system status information.

<u>HOLD</u>: The HOLD command causes the system to temporarily prevent one job or all jobs from being selected for processing.

LOG: The LOG command is used to enter information into the system log.

MODIFY: The MODIFY command tells the system to change the characteristics of a functioning output writer.

MOUNT: The MOUNT command tells the system to assign a device so a particular volume can be mounted on it. This device can then be assigned by the system to any job step that requires that volume.

RELEASE: The RELEASE command tells the system to resume job selection, which had been suspended by the HOLD command or TYPRUN=HOLD on the JOB statement.

<u>REPLY</u>: The REPLY command is used to reply to messages from the system or from a processing program that requests information.

<u>RESET</u>: The RESET command tells the system to change the class or priority, or both, of a job in an input, hold, or system output queue.

<u>SET</u>: The SET command is used to establish the values of certain variables, such as the time of day and the date.

START: The START command tells the system to start a particular system process, e.g., an input reader, graphic job processor, initiator, etc.

Command

STOP: The STOP command tells the system to stop a system process that had been previously started by a START command, or to stop the console display effected by the DISPLAY command.

<u>UNLOAD</u>: The UNLOAD command tells the system to remove the volume previously mounted in response to a MOUNT command.

 \underline{VARY} : The VARY command tells the system to place an I/O device or path into an online or offline status.

WRITELOG: The WRITELOG command tells the system to have the system output writer write out the contents of the system log.

MVT

In MVT, the following commands can be entered through the input stream.

<u>CANCEL</u>: The CANCEL command tells the system to immediately terminate the scheduling or execution of a job, to cancel a job on the queue, or to stop the writing of an output data set currently being processed by an output writer.

<u>DISPLAY</u>: The DISPLAY command causes a console display of certain system status information.

 $\underline{\text{HOLD}}$: The HOLD command causes the system to temporarily prevent one job or all jobs from being selected for processing.

LOG: The LOG command is used to enter information into the system log.

MODIFY: The MODIFY command tells the system to change the characteristics of a functioning initiator or output writer.

<u>MOUNT</u>: The MOUNT command tells the system to assign a device so a particular volume can be mounted on it. This device can then be assigned by the system to any job step that requires that volume.

RELEASE: The RELEASE command tells the system to resume job selection, which had been suspended by the HOLD command or TYPRUN=HOLD on the JOB statement.

<u>REPLY</u>: The REPLY command is used to reply to messages from the system or from a processing program that requests information.

<u>RESET</u>: The RESET command tells the system to change the class or priority, or both, of a job in an input, hold, or system output queue.

 \underline{SET} : The SET command is used to establish the values of certain variables, such as the time of day and the date.

START: The START command tells the system to start a particular system process, e.g., an input reader, graphic job processor, initiator, etc.

STOP: The STOP command tells the system to stop a system process that had been previously started by a START command or to stop the console display effected by the DISPLAY command.

<u>UNLOAD</u>: The UNLOAD command tells the system to remove the volume previously mounted in response to a MOUNT command.

<u>VARY</u>: The VARY command tells the system to place an I/O device or path into an online or offline status. In a Model 65 multiprocessing system (M65MP), this command is used to place I/O devices, paths, CPU, channel, and storage units in online or offline status.

<u>WRITELOG</u>: The WRITELOG command tells the system to have the system output writer write out the contents of the system log.

Example of the Command Statement

1. // START INIT,,, AB START AN INITIATOR FOR MFT

This command tells the system to start an initiator. The characters A and B indicate that the initiator is to select for execution only jobs of job classes A and B.

Section VI: The COMMENT Statement

The comment statement can be used to contain information that may be helpful to yourself or another person that may be running your job or reviewing your output listing.

The comment statement may appear anywhere except before the JOB statement or between continuation cards composing a single but extended JCL statement. A comment statement cannot be continued using continuation conventions; however, it can be followed by one or more comment statements.

The Comment Statement Format

//*comments

The comment statement consists of the characters //* in columns 1, 2, and 3, and the comments field.

Rules for Coding

Code the comment statement in the following order:

1. Code //* in columns 1, 2, and 3.

1-10	11-20	21-30	31-40	4i-50	51-60	61-70	71-80
234567890	1234567890	1234567890	1234567890	1234567890	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0
1.1.*							

2. Code the comments in columns 4 through 80.

1 10	11 11 00	1 01 70	71.40	41.60	51-60	C1 70	7: 00
12345670	901234567890	21-30	103145622000	1034563000		11913141617191910	1 10 2 4 4 5 6 7 10 10 10
i ISISIAISIOI (IOI	2011 [5]2]4[3]6]7 [6]3	11 [2]3[4]3[0]1 [0]3[0	11 5 5 5 5 5 5 5 5 5	I ISISIAISIOI (IOISIO	I ISISIAISIOI I IOISIOI	1151314131011101310	I ISISIAISISITI ISISIO
1.1.*THIS	DAITA SEIT. WILL	IL RE USED.	BY PROJECT	1.8. WHILE	TESTING NE	W .P.R.OGRAM.	T.P.S.E.C.R.E.T.

If all of the comments cannot be included on this comment statement, follow it with another comment statement.

OUTPUT LISTINGS

In the MSGLEVEL parameter, you can request an output listing of all the control statements processed in your job. If you do, you can identify comment statements by the appearance of *** in columns 1, 2, and 3.

Example of the Comment Statement

1. //*THE COMMENT STATEMENT CANNOT BE CONTINUED, //*BUT IF YOU HAVE A LOT TO SAY, YOU CAN FOLLOW A //*COMMENT STATEMENT WITH ONE OR MORE COMMENT //*STATEMENTS. Comment

Delimiter

Section VII: The DELIMITER Statement

When you submit data through an input stream, you must indicate to the system the beginning of the data and the end of the data. The beginning of the data is indicated by a DD * or DD DATA statement. The end of the data is indicated by a delimiter statement. The delimiter statement, however, is not required if the data is preceded by a DD * statement and you do not code the DLM parameter.

The Delimiter Statement Format

/* comments

The delimiter statement consists of the characters /* in columns 1 and 2 and the comments field. The system will recognize a delimiter other than /* if you code the DLM parameter on the DD statement defining data in the input stream. For more information, see the description of the DLM parameter in the section describing the DD statement.

Rules for Coding

Code the delimiter statement in the following order:

 Code /* (or the value assigned in the DLM parameter) in columns 1 and 2.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80
1234567890	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0
/* i					أحبيا المتعاد		<u> </u>

2. Code any desired comments.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80
1234567890	1234567890	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1234567890	1234567890	1234567890	1 2 3 4 5 6 7 8 9 0
14 THIS IS	THE LAST	OF DAITA FO	R THIS TOB	INPLUT DE	CK MUST BE	RETAINED	

The comments cannot be continued.

Example of the Delimiter Statement

```
1. //JOB54 JOB, 'C BROWN', MSGLEVEL=(2,0)
//STEPA EXEC PGM=SERS
//DD1 DD *

data

temporal data

temporal data for this step
```

Section VIII: The NULL Statement

The null statement can be placed at the end of a job's control statements and data or at the end of all the statements in an input stream. The null statement tells the system that the job just read should be placed on the queue of jobs ready for processing. If there are any control statements or data between a null statement and the next JOB statement, these are flushed by the system.

If you do not follow your job's control statements and data with a null statement, the system places your job on the queue when it encounters another JOB statement in the input stream. If your job is the last job in the input stream and a null statement does not follow it, the system recognizes that this is the last job in the input stream and it places your job on the queue.

If a null statement follows a control statement that is being continued, the system treats the null statement as a blank comment field and assumes that the control statement contains no other operands.

The Null Statement Format

(11

The null statement consists only of the characters // in columns 1 and 2. The remainder of the statement must be blank.

Example of the Null Statement

```
1. //MYJB JOB ,'C DAVIS',MSGLEVEL=(1,1)
//STEP1 EXEC PROC=FIELD
//STEP2 EXEC PGM=XTRA
//DD1 DD UNIT=2400
//DD2 DD *

data

data

/*
/*
```

Null

PEND

Section IX: The PEND Statement

The PEND statement is used to mark the end of an in-stream procedure. The name field of the PEND statement can contain a name. If comments are to be used, a blank must separate the operation field from the comment field. The PEND statement may not be continued. Do not include the PEND statement in cataloged procedures.

The PEND Statement Format

//name PEND comments

The PEND statement consists of the characters // in column 1 and 2 and three fields -- the name field, the operation (PEND) field, and the comments field.

Rules for Coding

Code the PEND statement in the following order:

1. Code // in columns 1 and 2.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80
1234567890	1234567890	1234567890	1 2 3 4 5 6 7 8 9 0	1234567890	1 2 3 4 5 6 7 8 9 0	1234567890	1234567890
11							

2. Follow // with a 1- to 8-character name or one or more blanks.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80
1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890
/ IENDPROC							

- If a name is coded,
 Follow the name with one or more blanks.
- 4. Code PEND.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80
1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890
//ENDPROC	PEND	 		 		 	

5. Follow PEND with one or more blanks.

6. Code any desired comments following the blank or blanks.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80			
1 2 3 4 5 6 7 8 9 0	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1 2 3 4 5 6 7 8 9 0			
/ I END PROC	LIENDIPROC PEND THIS CONCLUDES THE INSTREAM PROC									

A PEND statement cannot be continued.

Examples of the PEND Statement

- 1. //PROCEND1 PEND THIS STATEMENT IS REQUIRED FOR INSTREAM
- This PEND statement contains a comment.
- 2. // PEND
- A PEND statement can contain only the coded operation field preceded by $\prime\prime$ and one or more blanks and followed by blanks.

PROC

Section X: The PROC Statement

The PROC statement is the first control statement in an in-stream procedure. Optionally, the PROC statement can also be the first control statement in a cataloged procedure. If a PROC statement is included in a cataloged procedure, it is used to assign default values for symbolic parameters in the procedure. In an in-stream procedure, the PROC statement is used to mark the beginning of the procedure and can be used to assign default values to symbolic parameters in the procedure. A default value appearing on a PROC statement can be overridden by assigning a value to the same symbolic parameter on the EXEC statement that calls the procedure.

The PROC Statement Format

//name PROC operands comments

The PROC statement consists of the characters // in columns 1 and 2 and four fields -- the name field, the operation (PROC) field, the operand field, and the comments field.

Rules for Coding

Code the PROC statement in the following order:

1. Code // in columns 1 and 2.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80
1234567890	1234567890	1234567890	1234567890	1234567890	1 2 3 4 5 6 7 8 9 0	1234567890	1234567890
Mulliman							

Follow // with a 1- to 8-character name or one or more blanks.
 A name is required for in-stream procedures.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80
1234567890	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1234567890	1234567890	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1234567890
LIEXPAND				<u> </u>			

- 3. If a name is coded, follow the name with one or more blanks.
- 4. Code PROC.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80
234567890	1234567890	1234567890	1 2 3 4 5 6 7 8 9 0	1234567890	1 2 3 4 5 6 7 8 9 0	1234567890	1234567890
LIEXPAND P	Rac						

5. Follow PROC with one or more blanks.

6. Code the symbolic parameters and their default values following the blank or blanks. Separate each symbolic parameter and its default value with a comma. In a cataloged procedure, this field is not optional. In an in-stream procedure, this field is optional; if no operands are included, comments may not be coded, unless they appear on a continuation card.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80
234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890
LLEXPAND P	ROC NUMBER	=1.61218LI	BRARYI= LEVE	L.4. PAISS = (7)	2+201		

- 7. Follow the operands with one or more blanks.
- 8. Code any desired comments following the blank or blanks.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80		
12345678901	234567890	1234567890	1 2 3 4 5 6 7 8 9 0	1234567890	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0		
112334356778990112334356778990112334356778990112334566789901123345678990112334567899011233456789901123345678990									

9. The PROC statement can be continued onto another statement.

1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80		
1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890		
11 THE SYMBOLIC PARAMETERS NUMBER AND LIBRARY									

If PROC statement is to be included in a cataloged procedure, it must appear as the first control statement. For an in-stream procedure, the PROC statement is required; it must appear as the first control statement of the in-stream procedure.

Assigning a Value on a PROC Statement to a Symbolic Parameter

To assign a value on a PROC statement to a symbolic parameter, code:

symbolic parameter=value

Omit the ampersand that precedes the symbolic parameter in the procedure.

You can also mullify a symbolic parameter on the PROC statement. Code:

symbolic parameter=

Omit the ampersand that precedes the symbolic parameter and do not follow the equal sign with a value.

There are some things you should keep in mind as you assign values to symbolic parameters:

 The value you assign can be any length, but it cannot be continued onto another statement.

PROC

- 2. If the value contains special characters, enclose the value in appostrophes (the enclosing apostrophes are not considered part of the value). If the special characters include apostrophes, each must be shown as two consecutive apostrophes.
- If you assign more than one value to a symbolic parameter on the PROC statement, the first value encountered is assigned.
- 4. If the symbolic parameter is concatenated with some other information (e.g., &JOBNO.321), this information and the value you assign to the symbolic parameter cannot exceed a combined total of 120 characters.

Example of the PROC Statement

```
1. //DEF PROC STATUS=OLD,LIBRARY=SYSLIB,NUMBER=777777

//NOTIFY EX EC PGM=ACCUM

//DD1 DD DSNAME=MGMT,DISP=(&STATUS,KEEP),UNIT=2400, X

VOLUME=SER=888888

//DD2 DD DSNAME=&LIBRARY,DISP=(OLD,KEEP),UNIT=2311, X

VOLUME=SER=&NUMBER
```

Three symbolic parameters are defined in this cataloged procedure: &STATUS, &LIBRARY, and &NUMBER. Values are assigned to the symbolic parameters on the PROC statement. These values are used when the procedure is called and values are not assigned to the symbolic parameters by the programmer.

2. //CARDS PROC

This PROC statement can be used to mark the beginning of an in-stream procedure named CARDS.

Section XI: Appendixes

Appendixes

Appendix A: Cataloged and In-Stream Procedures

A cataloged procedure is a set of job control statements that has been assigned a name and placed in a partitioned data set known as the procedure library. (The IBM-supplied procedure library is named SYS1. PROCLIB; at your installation, there may be additional procedure libraries, which would have different names.) An in-stream procedure is a set of job control statements in the form of card images that have been placed in the input stream. An in-stream procedure can be executed any number of times during the job in which it appears. Both cataloged and in-stream procedures can consist of one or more steps; each step is called a procedure step. Each procedure step consists of an EXEC statement and DD statements. The EXEC statement identifies to the system what program is to be executed. The DD statements define the data sets to be used by the program.

You can use a cataloged procedure by coding the procedure name on an EXEC statement. You can use an in-stream procedure by coding the procedure name that is on the PROC statement on an EXEC statement. With both cataloged and in-stream procedures, you can follow this EXEC statement with DD statements that modify the procedure for the duration of the job step.

Appendix A consists of two chapters. The first chapter "Using Cataloged and In-stream Procedures" describes how to call a procedure, how to assign values to symbolic parameters, how to override parameters on the EXEC and DD statement, and how to add DD statements to a procedure. The second chapter "Writing Procedures: Cataloged and In-stream" describes the makeup of a procedure, how to use symbolic parameters, how to place a set of job control statements in the procedure library, and how to modify a procedure.

Appendix A

Using Cataloged and In-Stream Procedures

How to Call a Cataloged Procedure

To use a cataloged procedure, submit a JOB statement followed by an EXEC statement. On the EXEC statement you identify the cataloged procedure in one of two ways:

- Code, as the first operand, the name assigned to the procedure; or
- Code PROC= followed by the name assigned to the procedure as the first operand.

When you call a procedure, the system finds the control statements in the procedure library and then executes the programs identified on the EXEC statements in the procedure.

Besides identifying the procedure on the EXEC statement, you can assign values to symbolic parameters and override parameters that are coded on the EXEC statements contained in the procedure. You follow the EXEC statement with DD statements when you want to override DD statements in the procedure or add DD statements to the procedure.

When a cataloged procedure is written as part of the system output listing (i.e., MSGLEVEL=(1,0), MSGLEVEL=(1,1), or MSGLEVEL=1 is coded on the JOB statement), the procedure statements can be easily identified. An XX appears in columns 1 and 2 of a procedure statement that you did not override; X/ appears in columns 1 and 2 of a procedure statement that you did override; XX* appears in columns 1 and 2 of a procedure statement, other than a comment statement, that the system considered to contain only comments; and *** appears in columns 1 through 3 of a comment statement. In addition, if the procedure contains symbolic parameters, the output listing will show the symbolic parameters and the values assigned to them.

How to Call an In-Stream Procedure

To use an in-stream procedure, include the procedure, beginning with a PROC statement and ending with a PEND statement, with the job control language for your job. The in-stream procedure can appear immediately following the JOB statement, the JOBLIB DD statement, or the SYSCHK DD statement. The in-stream procedure cannot appear before the JOB statement or after the EXEC statement that calls it. An in-stream procedure can appear after a SYSIN DD * statement; however, this is not advisable because the SYSIN DD * statement causes the input reader to obtain direct access space for a system input data set.

To call the procedure, you identify the in-stream procedure on an EXEC statement in one of two ways:

- Code, as the first operand, the name on the PROC statement of the procedure; or
- Code PROC= followed by the name on the PROC statement of the procedure.

When you call an in-stream procedure, the system finds the control statements that have been written on a direct access device and then executes the programs identified on the EXEC statements of the procedure.

Appendix A

Besides identifying the procedure on the EXEC statement, you can assign values to symbolic parameters and override parameters that are coded on the EXEC statements contained in the procedure. You follow the EXEC statement with DD statements when you want to override DD statements in the procedure or add DD statements to the procedure.

When an in-stream procedure is written as part of the system output listing (i.e., MSGLEVEL=(1,0), MSGLEVEL=(1,1), MSGLEVEL=1, or MSGLEVEL=2 is coded on the JOB statement), the procedure statements can be easily identified. An ++ appears in columns 1 and 2 of a procedure statement that you did not override; +/ appears in columns 1 and 2 of a procedure statement that you did override; ++* appears in column 1 through 3 of a procedure statement, other than a comment statement, that the system considered to contain only comments; and *** appears in columns 1 through 3 of a comment statement. In addition, if the procedure contains symbolic parameters and you assign values to these on the EXEC statement that calls the procedure, the output listing will show the symbolic parameters and the values assigned to them.

Assigning Values to Symbolic Parameters

The cataloged or in-stream procedure you call may contain symbolic parameters. A symbolic parameter is characterized by a name preceded by an ampersand (§) and appears in the operand field of a cataloged or in-stream procedure statement or a DD statement used to override a DD statement in the procedure. A symbolic parameter stands as a symbol for a parameter, a subparameter, or a value. Symbolic parameters are used so that the procedure can be modified easily when it is called by a job step.

The following are examples of symbolic parameters:

```
//STEP1 EXEC PGM=COB, PARM='P1,&P2,,P3'
```

//DD1 DD DSNAME=FIX, UNIT=&DEVICE, SPACE=(CYL, (&SPACE, 10))

//DD2 DD DSNAME=CHAG, UNIT=2400, DCB=BLKSIZE=&LENGTH

Symbolic parameters must either be assigned values or mullified before the procedure is executed. There are two ways that a symbolic parameter can be assigned a value:

- A value can be assigned to the symbolic parameter on the EXEC statement that calls the procedure.
- 2. The PROC statement, which can appear as the first statement in a cataloged procedure and must appear as the first statement in an in-stream procedure, assigns a default value to the symbolic parameter.

Any default value assigned to a symbolic parameter on the PROC statement is overridden when you assign a value to the same symbolic parameter on the EXEC statement that calls the procedure. Symbolic parameters within quotes in the PARM field are an exception. Normally literals are not scanned for symbolics. Whenever an &name within quotes in the PARM field is not defined, the ampersand is treated as if a double ampersand were coded and handled as a literal.

If cataloged procedures contain symbolic parameters, the installation should provide you with a list of the symbolic parameters used, what meaning is associated with each symbolic parameter, and what default value has been assigned to each of the symbolic parameters on the PROC statement. (The PROC statement is optional for cataloged procedures; therefore, there may be no default values assigned to the

symbolic parameters used in a cataloged procedure.) You need this information to determine what the symbolic parameter represents and to decide whether to use the default value or to assign a value to the symbolic parameter on the EXEC statement that calls the procedure.

To assign a value to a symbolic parameter, you code on the EXEC statement that calls the procedure:

symbolic parameter=value

Omit the ampersand that precedes the symbolic parameter. For example, if the symbolic parameter &NUMBER appears on a DD statement in the procedure, code NUMBER=value on the EXEC statement that calls the procedure. Any value you assign to a symbolic parameter is in effect only during the current execution of the procedure.

There are some things you should keep in mind as you assign values to symbolic parameters:

- The value you assign can be any length, but it cannot be continued onto another statement.
- 2. If the value contains special characters, enclose the value in apostrophes (the enclosing apostrophes are not considered part of the value). If the special characters include apostrophes, each must be shown as two consecutive apostrophes.
- 3. If, on the EXEC statement, you assign more than one value to a symbolic parameter, the first value encountered is used.
- 4. The total length of a value assigned to a symbolic parameter cannot exceed 120 characters. This total includes the first through the last parameters, subparameters, or values in the card image.
- 5. If the symbolic parameter is a positional parameter followed by other parameters in the statement, it should be delimited in the procedure by a period instead of a comma. Then, if the parameter is nullified on the PROC statement or on an EXEC statement calling the procedure, the statement containing the symbolic parameter will not begin with a comma. The system recognizes the period as a delimiter; the period does not appear in the statement when you nullify or assign a value to the symbolic parameter. When you do assign a value to a symbolic parameter that is a positional parameter, you should follow the value with a comma; the value must then be enclosed in apostrophes since a comma is a special character.

For example, in the following DD statement contained in a cataloged procedure named EXAMPLE, &POSPARM represents a positional parameter.

//DEFINE DD &POSPARM.DSN=ATLAS,DISP=OLD

To replace the symbolic parameter &POSPARM with the parameter DUMMY, you would code on the EXEC statement calling the procedure:

//DOTHIS EXEC EXAMPLE, POSPARM= DUMMY, '

When the cataloged procedure named EXAMPLE is executed, the DD statement named DEFINE appears as:

//DEFINE DD DUMMY, DSN=ATLAS, DISP=OLD

Note: Do not confuse positional parameters with positional subparameters. For a list of the positional parameters you can code on the DD statement, see "Positional and Keyword Parameters" in the section on the DD statement.

NULLIFYING A SYMBOLIC PARAMETER

Besides assigning values to symbolic parameters, you can nullify a symbolic parameter, i.e., tell the system to ignore the symbolic parameter.

To nullify a symbolic parameter, code on the EXEC statement that calls the procedure:

```
symbolic parameter=
```

Omit the ampersand that precedes the symbolic parameter in the procedure and do not follow the equal sign with a value.

```
For example, if a DD statement in a procedure named TIMES is

//DD8 DD UNIT=1403,UCS=&UCSINFO
```

and you want to nullify the symbolic parameter &UCSINFO, you would code:

```
//CALL EXEC TIMES, UCSINFO=
```

Example of Assigning Values to Symbolic Parameters

1. The following are the first four statements of a cataloged procedure named ASSEMBLE that contains symbolic parameters. The PROC statement assigns a default to the symbolic parameter &OBJECT and nullifies the symbolic parameter &LIST. Notice that the symbolic parameter &DEPT is not assigned a value on the PROC statement; therefore, the job step that calls this procedure must assign a value to &DEPT.

```
//DEF PROC OBJECT=NODECK, LIST=
//ASM EXEC PGM=IEUASM,PARM=('LINECNT=50', X
// $LIST.LIST,&OBJECT)
//SYSLIB DD DSNAME=SYS1.MACLIB,DISP=OLD
// DD DSNAME=LIBRARY.&DEPT.MACS,DISP=OLD
```

When you call this procedure, you can assign values to the symbolic parameters by coding:

```
//STEP3 EXEC ASSEMBLE, DEPT=D82, OBJECT=DECK
```

The value assigned to &OBJECT in this EXEC statement overrides the value assigned to &OBJECT in the PROC statement. Since no value is assigned to &LIST in this EXEC statement, LIST is nullified -- because that is the default specified in the PROC statement.

While the procedure is being executed, the first four statements of this procedure would appear as shown below.

```
Appendix A
```

```
//DEF PROC OBJECT=NODECK,LIST=
//ASM EXEC PGM=IEUASM,PARM=('LINECNT=50', X
// LIST,DECK)
//SYSLIB DD DSNAME=SYS1.MACLIB,DISP=OLD
// DD DSNAME=LIBRARY.D82MACS,DISP=OLD
```

The above example applies to in-stream procedures as well as cataloged procedures. However, you must refer to the name on the PROC statement of the in-stream procedure when calling the procedure.

2. The following is an in-stream procedure that contains symbolic parameters. The PROC statement marks the beginning of the in-stream procedure and in this example assigns defaults to symbolic parameters &D, &U, &V, and &S. The procedure is named INSTREAM.

```
//INSTREAM
                PROC D='(NEW, PASS)', U=2311, V='SER=66655',
                     S='(TRK,(1,1,1))'
11
//IN1
                EXEC PGM=IEWL, PARM='XREF, LIST, NCAL'
//SYSPRINT
                DD
                     SYSOUT=A
//SYSUT1
                DD
                     DSNAME=UTC, DISP=OLD, UNIT=2311,
                     VOLUME=SER=66651
//
//SYSLIN
                DD
                     DSNAME=UTE, DISP=OLD, UNIT=2311,
//
                     VOLUME=SER=66652
//SYSLMOD
                DD
                     DSNAME= & &LOAD, DISP=&D, UNIT=&U,
                     VOLUME=&V,SPACE=&S
//
                PEND
```

When you call this procedure, you must code the name on the PROC statement on the EXEC statement. You can assign values to the symbolic parameters by coding:

```
//CALL EXEC INSTREAM, D='(NEW, PASS)', V='SER=66653'
```

The values assigned to &D and &V in this EXEC statement override the values assigned to these symbolic parameters in the PROC statement.

Since no value is assigned to &U OR &S, the defaults specified on the PROC statement are used when the procedure is executed.

While the procedure is being executed, it would appear as shown below.

```
//INSTREAM
                PROC D='(NEW, PASS)', U=2311, V='Ser=66655',
                     S=(TRK, (1,1,1))
                EXEC PGM=IEWL, PARM='XREF, LIST, NCAL'
//IN1
//SYSPRINT
                DD
                     SYSOUT=A
                     DSNAME=UTC, DISP=OLD, UNIT=2311,
//SYSUT1
                DD
                     VOLUME=SER=66651
//
                DD
//SYSLIN
                     DSNAME=UTE, DISP=OLD, UNIT=2311,
                     VOLUME=SER=66652
//
//SYSLMOD
                     DSNAME=&&LOAD, DISP=(NEW, PASS), UNIT=2311,
                DD
                     VOLUME=SER=66653, SPACE= (TRK, (1,1,1))
```

The PEND statement is necessary but is not executed.

3. The following are the first four statements of a cataloged procedure named TEST that contains symbolic parameters. The PROC statement nullifies the symbolic parameter &DUM1 and assigns a default value to the symbolic parameter &DUM2.

```
//TEST PROC DUM1=, DUM2='DUMMY,'
//STEP1 EXEC PGM=IEFBR14
//DD1 DD & DUM1.DSN=ABLE, DISP=OLD
//DD2 DD & DUM2.DSN=BAKER, DISP=OLD
```

&DUM1 and &DUM2 are positional parameters. They are delimited by a period so that, if they are nullified, the DD statement does not begin with a comma. The system recognizes the period as a delimiter; the period does not appear in the statement when you nullify or assign a value to the symbolic parameter. The value assigned to DUM2 in the PROC statement is followed by a comma so that a comma will delimit the value when it appears in the statement in the procedure. The value must be enclosed in apostrophes because the comma is a special character.

When you call this procedure, you can reverse the default values on the PROC statement so that the DD statement named DD1 defines a dummy data set and the DD statement named DD2 defines an existing data set:

```
//STEPUP EXEC TEST, DUM1='DUMMY,', DUM2=
```

The value assigned to &DUM1 on the EXEC statement overrides the nullification of &DUM1 on the PROC statement. &DUM2 is nullified on this EXEC statement, so the value assigned to &DUM2 on the PROC statement is ignored.

While this procedure is being executed, the first four statements will appear as shown below:

```
//TEST PROC DUM1=, DUM 2='DUMMY, '
//STEP1 EXEC PGM=IEFBR14
//DD1 DD DUMMY, DSN=ABLE, DISP=OLD
//DD2 DD DSN=BAKER, DISP=OLD
```

Overriding, Adding, and Nullifying Parameters on an EXEC Statement

You can override, add, or nullify parameters coded on EXEC statements contained in a cataloged or in-stream procedure. You make these changes on the EXEC statement that calls the procedure. You should override parameters only when you want to change their values. Do not override parameters to correct syntactical errors in the procedure. You cannot change the PGM parameter. The changes you make are in effect during the current execution of the procedure.

OVERRIDING EXEC STATEMENT PARAMETERS

To override an EXEC statement parameter in a procedure, identify on the EXEC statement that calls the procedure the parameter you are overriding, the name of the EXEC statement on which the parameter appears, and the change to be made. The format required to override a parameter is:

```
parameter.procstepname=change
```

For example, if one of the EXEC statements in the procedure named FILL is:

```
//STEP3 EXEC PGM=DEF, REGION=100K
```

and you want to change REGION=100K to REGION=80K, you would code:

```
//CALL EXEC FILL, REGION.STEP3=80K
```

You can change more than one EXEC statement parameter in the procedure. For example, if one of the EXEC statements in the procedure name JKW is:

```
//STEP2 EXEC PGM=OUT, TIME=(2,30), REGION=120K
```

and you want to change TIME=(2,30) to TIME=4 and REGION=120K to REGION=200K, you would code:

```
//STEP3 EXEC JKW, TIME.STEP2=4, REGION.STEP2=200K
```

Appendix A

If you want to change different parameters that appear on different EXEC statements in the procedure, you must code all overriding parameters for one procedure step before those for the next step. For example, if the first three EXEC statements in a procedure named DART are:

```
//STEP1 EXEC PGM=JCTSB,PARM='*14863',REGION=100K
//STEP2 EXEC PGM=JCTRC,REGION=80K
//STEP3 EXEC PGM=JCTQD,COND=(8,LT),TIME=3
```

You want to make the following modifications:

- Override the PARM parameter on the first EXEC statement.
- Override the REGION parameter on the first EXEC statement.
- 3. Override the REGION parameter on the second EXEC statement.
- 4. Override the TIME parameter on the third EXEC statement.

The EXEC statement that calls the procedure would appear as:

```
//STEPC EXEC DART, PARM.STEP1='*86348', X
REGION.STEP1=120K, REGION.STEP2=100K, X
IIME.STEP3=(4,30)
```

You can code an EXEC statement parameter and omit the term "Procstepname." When you do this, the procedure is modified as follows:

- If the PARM parameter is coded, it applies only to the first procedure step. If a PARM parameter appears in a later EXEC statement, it is nullified.
- If the TIME parameter is coded, it applies to the total procedure. If the TIME parameter appears on any of the EXEC statements in the procedure, it is nullified.
- If any other parameter is coded, it applies to every step in the procedure. If the parameter appears on an EXEC statement, it is overridden; if the parameter does not appear on an EXEC statement, it is added.

For example, assume the EXEC statements in a procedure named RYIN are:

```
//STEP1 EXEC PGM=SECT,PARM=140947,REGION=100K
//STEP2 EXEC PGM=PARA,PARM=105600,COND=EVEN
//STEP3 EXEC PGM=SENT,PARM=L1644,REGION=80K
```

You want to make the following modifications to the procedure:

- Override the PARM parameter in the first procedure step, and nullify all other PARM parameters in the procedure.
- 2. Assign the same region size to all steps in the procedure.

The EXEC statement that calls the procedure would appear as:

```
//SPAA EXEC RYIN, PARM=L1644, REGION=136K
```

While the procedure named RYIN is being executed, these three EXEC statements would appear as:

```
//STEP1 EXEC PGM=SECT, PARM=L1644, REGION=136K
//STEP2 EXEC PGM=PARA, COND=EVEN, REGION=136K
//STEP3 EXEC PGM=SENT, REGION=136K
```

ADDING EXEC STATEMENT PARAMETER

To add a parameter to an EXEC statement in the procedure, identify on the EXEC statement that calls the procedure the parameter you are adding, the name of the EXEC statement to which you want to add the parameter, and the value you are assigning to the parameter. The format required to add a parameter is:

parameter.procstepname=value

Parameters you are adding and overriding for a step must be coded before those parameters you are adding and overriding for the next step.

For example, if the first two EXEC statements of a procedure named GLEAN are:

```
//STEP1 EXEC PGM=FAC, COND=(8, LT)
//STEP2 EXEC PGM=UP, PARM=377685
```

You want to make the following modifications to the procedure:

- 1. Override the COND parameter on the first EXEC statement.
- 2. Add the ROLL parameter to the first EXEC statement.
- 3. Add the REGION parameter to the second EXEC statement.

The EXEC statement that calls the procedure would appear as:

```
//STPA EXEC GLEAN, COND. STEP1=(12,LT),

// ROLL. STEP1=(NO, NO), REGION. STEP2=88K
```

NULLIFYING EXEC STATEMENT PARAMETERS

To nullify a parameter on an EXEC statement in the procedure, identify, on the EXEC statement that calls the procedure, the parameter you want to nullify and the name of the EXEC statement on which the parameter appears. The format required to nullify a parameter is:

parameter.procstepname=

Parameters that you are nullifying, overriding, and adding to a step must be coded before those for the next step.

For example, if the first two EXEC statements of a procedure named GINN are:

```
//STEP1 EXEC PGM=INV, PARM='146,899', RD=R
//STEP2 EXEC PGM=DET, PARM=XYA34, COND=(80,GT)
```

You want to make the following modifications to the procedure:

- 1. Nullify the PARM parameter on the first EXEC statement.
- Add the COND parameter to the first EXEC statement.
- 3. Override the COND parameter on the second EXEC statement.

The EXEC statement that calls the procedure would appear as:

```
//STEPY EXEC GINN, PARM.STEP1=, COND.STEP1=(25, EQ),
// COND.STEP2=(80,GE)
```

Appendix A

X

Appendix A: Cataloged and In-stream Procedures -- Using Procedures 291

Examples of Overriding, Adding, and Nullifying Parameters on an EXEC Statement

1. You want to call the following cataloged procedure named ESEAP:

```
EXEC PGM=FLIER, PARM=7121190, ACCT= (4805, UNASGN)
//STEPA
                DSNAME=LIBRARY.GROUP67, DISP=OLD
//DDA
//DDB
           DD
                DSNAME=STAND.FIVE,DISP=OLD
//STEPB
           EXEC PGM=VERSE, DPRTY=(11,13), PARM=780684, RD=R
                UNIT=2311, SPACE=(TRK, (10, 2))
//DDD
           \mathbf{D}\mathbf{D}
                DSNAME=COL.DISP=OLD
//DDE
           DD
                DDNAME= IN
```

You want to make the following modifications to the procedure:

- 1. Add the REGION parameter to both EXEC statements.
- Add the DPRTY parameter to the first EXEC statement.
- 3. Override the ACCT parameter on the first EXEC statement.
- 4. Nullify the RD parameter on the second EXEC statement.
- 5. Add the COND parameter to the second EXEC statement.

The EXEC statement that calls the procedure would appear as:

```
//MINC EXEC ESEAP, REGION=86K, DPRTY.STEPA=(11,13), X
// ACCT.STEPA=(4805,7554), RD.STEPB=, COND.STEPB=(60,LE)
```

The two EXEC statements in the procedure would appear as shown below while the procedure is being executed. These modifications do not appear on an output listing.

```
//STEPA EXEC PGM=FLIER, PARM=7121190, ACCT=(4805, 7554), X
// REGION=86K, DPRTY=(11, 13)
//STEPB EXEC PGM=VERSE, DPRTY=(11, 13), REGION=86K, COND=(60, LE)
```

2. You want to call the following in-stream procedure named INLINE:

```
//INLINE PROC
//ST EP1
          EXEC PGM=COMP, ACCT=(7037, 2361), REGION=86K
//DD1
          \mathbf{D}\mathbf{D}
                DSNAME=INFORM, DISP=OLD, UNIT=2311, VOLUME=SER=75250
                DSNAME=LCJWC, DISP=OLD, UNIT=2311, VOLUME=SER=76250
//DD2
           DD
          EXEC PGM=CHECKS, PARM=212334, COND= (50, LE), ACCT= (2001, 0539)
//STEP 2
//DD3
          DD
                DSNAME=PAY, DISP=OLD, UNIT=2311, VOLUME=SER=MEMORY
//DD4
                DSNAME=INCREAS, DISP=OLD, UNIT=2311, VOLUME=SER=33333
           PEND
```

You want to make the following modifications to the procedure:

- Add DPRTY parameter to both EXEC statements.
- 2. Nullify the REGION parameter on the first EXEC statement.
- 3. Override the ACCT parameter on the second EXEC statement.

The EXEC statement that calls the procedure would appear as:

```
//CALLER EXEC INLINE, DPRTY=(11,13), REGION. STEP1=, X
// ACCT. STEP2=(4710,5390)
```

The two EXEC statements in the procedure would appear as shown below while the procedure is being executed. These modifications do not appear on an output listing.

```
//STEP1 EXEC PGM=COMP, ACCT=(7037, 2361), DPRTY=(11,13)
//STEP2 EXEC PGM=CHECKS, PARM=212334, COND=(50,LE), DPRTY=(11,13)
ACCT=(4710,5390)
```

Overriding, Adding, and Nullifying Parameters on a DD Statement

You can override, add, or nullify parameters coded on a DD statement contained in a cataloged procedure. You make these changes at the time the procedure is called; these changes are in effect during the current execution of the procedure. Use one DD statement to override, add, and nullify parameters on the same DD statement in the procedure.

OVERRIDING DD STATEMENT PARAMETERS

To override a parameter on a DD statement in the procedure, you must include a DD statement following the EXEC statement that calls the procedure. The ddname of this DD statement must identify the DD statement that contains the parameter you are overriding and the procedure step in which the DD statement appears. Code, in the operand field of this DD statement, the parameter you are overriding and the change; or code a mutually exclusive parameter that is to take the place of a parameter. Since mutually exclusive keywords are allowed during override processing, the first reference to such a keyword nullifies all further references, regardless of their positions on the DD statements. The format required for a DD statement following the EXEC statement is:

//procstepname.ddname DD parameter=change

//procstepname.ddname DD

DD mutually exclusive parameter=value

For example, if one of the DD statements in a procedure step named STEP4 is:

//DD2 DD DSNAME=ABIN, DISP=OLD, VOLUME=SER=54896, UNIT=2400

and you want to change UNIT=2400 to UNIT=180, you would code:

//STEP4.DD2 DD UNIT=180

When you code a mutually exclusive parameter on an overriding DD statement, the system replaces the parameter on the specified DD statement with the mutually exclusive parameter. For example, the parameters SYSOUT and DISP are mutually exclusive parameters. If one of the DD statements in a procedure step named PRINT is:

//DD8 DD SYSOUT=C

and you do not want the data set printed, you could code:

//PRINT.DD8 DD DISP=(NEW,DELETE)

You have replaced the SYSOUT parameter with the DISP parameter.

You can change more than one parameter that appears on a DD statement in the procedure. For example, if one of the DD statements in a procedure step named STEP5 is:

//DDX DD DSNAME=FIES, DISP=OLD, UNIT=2400-2, VOLUME=REF= * .STEP2.DDC

and you want this DD statement to define a new data set, you would code:

//STEP 5. DDX DD DSNAME=RVA1, DISP= (NEW, KEEP)

If you want to change parameters that appear on different DD statements in the same procedure step, the overriding DD statements must be in the same order in the input stream as the corresponding DD statements in the procedure step. For example, if the first step of a procedure named AJG is:

Appendix A

```
//STEP1 EXEC PGM=MGR, REGION=80K
//DD1 DD DSNAME=LONE, DISP=(NEW, DELETE), X
// UNIT=2400, VOLUME=SER=568998
//DD2 DD UNIT=TAPE
//DD3 DD UNIT=2311, DISP=(,PASS), SPACE=(TRK,(20,2))
```

You want to make the following modifications to the procedure:

- Change the UNIT parameter on the first DD statement.
- 2. Change the VOLUME parameter on the first DD statement.
- 3. Change the SPACE parameter on the third DD statement.

The statements in the input stream would appear as:

```
//CATP EXEC AJG
//STEP1.DD1 DD UNIT=2400-3, VOLUME=SER=WORK18
//STEP1.DD3 DD SPACE=(CYL,(4,1))
```

If you want to change parameters that appear in different procedure steps in the cataloged procedure you are calling, the overriding DD statements must be in the same order as are the procedure steps.

The DCB parameter: If you want to change some of the keyword subparameters in the DCB parameter, you need not recode the entire DCB parameter. Instead, code only those subparameters that you are changing and any mutually exclusive subparameters that are to replace particular subparameters. For example, if one of the DD statements in a procedure step named NED is:

```
//DD3 DD DSNAME=PER, DISP=(,KEEP), UNIT=2311, SPACE=(TRK,(88,5)), X
// DCB=(BUFNO=1,BLKSIZE=80,RECFM=F,BUFL=80)
```

and you want to change BLKSIZE=80 to BLKSIZE=320 and BUFL=80 to BUFL=320, you would code:

```
//NED. DD3 DD DCB=(BLKSIZE=320, BUFL=320)
```

The DCB subparameters BUFNO and RECFM remain unchanged.

When you are overriding a procedure DD statement that contains a DCB parameter and the overriding DD statement uses a backward reference to copy the DCB information on an earlier DD statement, the DCB information on the procedure DD statement overrides any of the corresponding subparameters that are copied. For example, if one of the DD statements in a step named NED of a procedure named CATROC is:

```
//DD5 DD DSNAME=PER,UNIT=2311,SPACE=(TRK,(88,5)), X
// DCB=(BLKSIZE=640,RECFM=FB)
```

and you have in your input stream:

```
//STP1 EXEC PGM=A
//DD1 DD DSN=AIR,UNIT=2311,SPACE=(TRK,(10,1)), X
// DCB=(BLKSIZE=320,RECFM=FBA,BUFL=320)
//STEP2 EXEC CATROC
//NED.DD5 DD DCB=*.STP1.DD1
```

The DD statement DD5 in a cataloged procedure would appear as shown below while the procedure is being executed. (The DCB information on the procedure statement overrides any of the corresponding subparameters that are copied.) This modification does not appear on output listing.

If you want to override a DD statement that contains a dsname positional subparameter in the DCB parameter, you must recode the dsname subparameter, even though you do not want to change it. For example, if one of the DD statements in a procedure step named BANK is:

```
//DD5 DD DSNAME=SAVE, DISP=(NEW, KEEP), UNIT=2311, X
// SPACE=(CYL, (12,2)), DCB=(ACCNT, BUFNO=5, KEYLEN=2)
```

and you want to change BUFNO=5 to BUFNO=3, you would code:

```
//BANK.DD5 DD DCB= (ACCNT, BUFNO=3)
```

Both the dsname ACCNT and KEYLEN subparameters remain unchanged. You must code ACCNT on the overriding DD statement.

ADDING DD STATEMENT PARAMETERS

To add a parameter to a DD statement in the procedure, you must include a DD statement following the EXEC statement that calls the procedure. The ddname of this DD statement must identify the DD statement to which you are adding a parameter and the procedure step in which the DD statement appears. Code, in the operand field of this DD statement, the parameter you are adding. The format required for a DD statement following the EXEC statement is:

```
//procstepname.ddname DD parameter=value
```

For example, if one of the DD statements in a procedure step named STPTWO is:

```
//DDM DD DSNAME=TYPE, DISP=(, KEEP), UNIT=2400
```

and you want to add the VOLUME parameter, you would code:

```
//STPTWO.DDM DD VOLUME=SER=569433
```

If you want to add parameters or change parameters that appear on different DD statements, the overriding DD statements must be in the same order in the input stream as the corresponding DD statements in the procedure.

NULLIFYING DD STATEMENT PARAMETERS

There may be parameters on a DD statement that you do not want to override, but you want the system to ignore. Also, when you modify a DD statement in a procedure by overriding certain parameters or adding parameters, there may be some parameters remaining that no longer have meaning for your data set definition but would effect processing of the data set. To temporarily remove these parameters, you can mullify them. (If you are replacing a parameter with a mutually exclusive parameter, do not nullify the parameter that is being replaced.)

To nullify a parameter on a DD statement in the procedure, you must include a DD statement following the EXEC statement that calls the procedure. The ddname of this DD statement must identify the DD statement that contains the parameter you are nullifying and the procedure step in which the DD statement appears. Code in the operand field of this DD statement the parameter you are nullifying followed by an equal sign; do not follow the equal sign with a value. The format required for a DD statement following the EXEC statement is:

```
//procstepname.ddname DD parameter=
```

Appendix A: Cataloged and In-stream Procedures -- Using Procedures 295

Appendix A

X

For example, if one of the DD statements in a procedure step named SALLS is:

```
//DDP DD DSNAME=STEP, DISP=OLD, UNIT=2314, X
// VOLUME=SER=556978
```

and you are overriding the DSNAME, DISP, and UNIT parameters, adding the DCB parameter, and want the VOLUME parameter ignored, you would code:

```
//SALLS.DDP DD DS NAME=&&TEMP, DIS P= (, PASS), UNIT=2400-2, X
DCB=(DEN=2, TRTCH=ET), VOLUME=
```

To nullify the DCB parameter, each DCB subparameter must be nullified individually. For example, if a DD statement contains DCB=(RECFM=FBA,BLKSIZE=160,LRECL=80), then DCB=(RECFM=,BLKSIZE=,LRECL=) must be coded on the overriding DD statement in order to nullify the DCB parameter.

To nullify a DUMMY parameter, code the DSNAME parameter on the overriding DD statement, but do not use the data set name NULLFILE. (Coding DSNAME=NULLFILE has the same effect as coding the DUMMY parameter.)

<u>Caution</u>: When you are overriding a procedure DD statement that contains the SPACE parameter and the overriding DD statement defines an existing data set, be sure to nullify the SPACE parameter. When a secondary quantity is coded on the procedure DD statement, the system uses this value to assign additional space to the data set instead of the secondary quantity you may have specified when the data set was created. Also, the RISE subparameter, when specified on the procedure statement, causes the system to release any of the existing data set's unused space.

If you want to nullify, add, or override parameters that appear on different DD statements, the overriding DD statements must be in the same order in the input stream as the corresponding DD statements in the procedure.

Examples of Overriding, Adding, and Nullifying Parameters on a DD Statement

1. You want to call the following procedure named SALL:

```
//STP1
        EXEC PGM=GLR14
//DD11
         DD DSNAME=XTRA.LEVEL, DISP=OLD
//DD12 DD
               DSNAME=CONDS, DISP=(, PASS), UNIT=2400
             DUMMY, DSNAME=LAST, VOLUME=REF=*.DD11, DISP=(,CATLG)
//DD13
         DD
       EXEC PGM=FAIR
//STP2
               DSNAME= *.STP1.DD12, DISP=(OLD, DELETE)
//DD21
         DD
//DD 22
        DD
               DSNAME=JFTZ, DISP=(NEW, KEEP), UNIT=2311,
                                                                 X
               SPACE=(CYL, (2, 1), RLSE)
//DD23
         DD
               SYSOUT=G
```

You want to modify the procedure as follows:

- Change the data set name on the statement named DD12 from CONDS to C8495.
- Add the VOLUME parameter to the statement named DD12.
- Nullify the DUMMY parameter on the statement named DD13.

Appendix A

- Change the disposition on the statement named DD21 from DELETE to KEEP.
- 5. Define an existing data set on the statement named DD22.
- 6. Add the parameter UNIT on the statement named DD23.
- 7. Add the parameter SPACE on the statement named DD23.

The EXEC statement that calls the procedure and the overriding DD statements that follow it would appear as:

```
EXEC SAIL
//CALL
//STP1.DD12
                    DS NAME=C8495, VOLUME=SER=979354
                DD
//STP1.DD13
                DD
                     DSNAME=SOMENAME
                DD
                     DISP=(OLD, KEEP)
//STP 2. DD 21
//STP2.DD22
                DD
                     SPACE=, DSNAME=GR1833, DISP=OLD,
                                                                      X
//
                     VOL=SER=577632
//STP2.DD23
                DD
                     UNIT=2314, SPACE=(TRK, (150, 15))
```

The cataloged procedure would appear as shown below while the procedure is being executed. These modifications do not appear on an output listing.

```
//STP1
          EXEC PGM=GLF14
//DD11
          DD
                DSNAME=XTRA.LEVEL.DISP=OLD
//DD12
                                                                     X
                DSNAME=C8495, DISP=(, PASS), UNIT=2400,
          DD
                VOLUME=SER=979354
//
//DD13
               DSNAME=LAST, VOL=REF=*. DD11, DISP=(, CATLG)
//STP2
          EXEC PGM=FAIR
//DD 21
          DD
                DSNAME=*.STP1.DD12,DISP=(OLD,KEEP)
//DD22
          DD
                DSNAME=GR1833, DISP=OLD, UNIT=2311, VOL=SER=577632
//DD23
          DD
                SYSOUT=G, UNIT=2314, SPACE= (TRK, (150, 15))
```

2. You want to call the following in-stream procedure named CARDS:

```
//CARDS
          PROC
//STEPA
          EXEC PGM=FIGURE
//DDA1
          DD
                DSNAME=NUMBERS, DISP=OLD
//DDA2
          DD
               DSNAME=PROCESS, DISP=(, PASS), UNIT=2311,
                SPACE=(TRK,(1,1,1))
//STEPB
          EXEC PGM=RESULT
//DDB1
          DD
               DSNAME=VSC, DISP=OLD
               DSNAME=*.STEPA.DDA2, DISP=(OLD, KEEP)
//DDB2
          DD
//DDB3
          DD
                SYSOUT=C
          PEND
```

You want to modify the procedure as follows:

- 1. Change the data set name on the DDA1 statement from NUMBERS to NAMES.
- Add the VOLUME parameter to the DDA2 statement.
- 3. Add the parameters UNIT and SPACE on the DDB3 statement.

The EXEC statement that calls the procedure and the overriding DD statements that follow it would appear as:

```
//CALL EXEC CARDS
//STEPA.DDA1 DD DSNAME=NAMES
//STEPA.DDA2 DD VOLUME=SER=5858
//STEPB.DDB3 DD UNIT=2311, SPACE=(TRK, (150,15))
```

The in-stream procedure would appear as shown below while the procedure is being executed. These modifications do not appear on an output listing. The PROC statement is processed only when it contains symbolic parameters.

```
//STEPA
          EXEC PGM=FIGURE
                DSNAME=NAMES, DISP=OLD
//DDA1
          DD
//DDA2
                DSNAME=PROCESS, DISP=(, PASS), UNIT=2311,
                SPACE=(TRK, (1,1,1)), VOLUME=SER=5858
//STEPB
          EXEC PGM=RESULT
//DDB1
          DD
               DSNAME=VSC, DISP=OLD
//DDB2
          DD
                DSNAME= *.STEPA. DDA 2, DISP=(OLD, KEEP)
//DDB3
          DD
                SYSOUT=C, UNIT=2311, SPACE= (TRK, (150, 15))
```

Overriding DD Statements that Define Concatenated Data Sets

when a concatenation of data sets is defined in a cataloged procedure and you attempt to override the concatenation with one DD statement, only the first (named) DD statement is overridden. To override others, you must include an overriding DD statement for each DD statement; the DD statements in the input stream must be in the same order as the DD statements in the procedure. The second and subsequent overriding statements must not be named. If you do not wish to change one of the concatenated DD statements, leave the operand field blank on the corresponding DD statement in the input stream. (This is the only case where a blank operand field for a DD statement is valid.)

For example, suppose you are calling a procedure that includes the following sequence of DD statements in STEPC:

```
//DD4 DD DSNAME=A.B.C, DISP=OLD

// DD DSNAME=STEP, DISP=OLD, UNIT=2311, VOL=SER-X12182

// DD DSNAME=TYPE3, DISP=OLD, UNIT=2311, VOLUME=SER=EL142

// DD DSNAME=A.B.D, DISP=OLD
```

If you want to override the DD statements that define the data sets named STEP and A.B.D, the sequence of DD statements in the input stream would appear as:

Adding DD Statements to a Procedure

You can add DD statements to a procedure when you call the procedure. These additional DD statements are in effect only while the procedure is being executed.

To add a DD statement to a procedure step, follow the EXEC statement that calls the procedure and any overriding DD statements for that step with the additional DD statement. The format of a DD statement to be added to a procedure step is:

```
//procstepname or
//procstepname.ddname DD parameters
```

You must identify the procedure step to which the data set is to be added in the name of the DD statement. If you also assign a ddname, it must be different from all the other ddnames in the procedure step.

If you do not assign a ddname, the data set is concatenated to the data set defined by the preceding DD statement. If the data set is the first to be added to the procedure step, it is concatenated to the last data set defined in the procedure step.

For example, the first step of a cataloged procedure named MART is:

You want to make the following modifications to the procedure:

- Change the UNIT parameter on the DD statement named DDM;
- Concatenate a data set to the data set defined by DDN;
- 3. Add another data set with DDNAME=DDO.

The statements in the input stream would appear as:

Examples of Adding DD Statements to a Procedure

1. You want to call the following procedure named D995A:

```
//SA
         EXEC PGM=ANALY
//DDA1
         DD DSNAME=PROJ.0843, DISP=OLD
//DDA2
         DD
              DDNAME=SYSIN
//DDA3
        DD SYSOUT=B
         EXEC PGM=MANMO3
//SB
        DD UNIT=2400
//DDB1
//DDB2
         DD
              UNIT=2400
//DDB3
         DD
              DSNAME=X54, VOLUME=SER=(36544,36545),
              UNIT=(2400,2), DISP=(OLD,KEEP)
```

You want to modify the procedure as follows:

- Supply the data set definition for the DDA2 statement by adding a DD statement.
- 2. Change the SYSOUT parameter on the DDA3 statement to UNIT=1403.
- 3. Add a DD statement to the step named SB.

The EXEC statement that calls the procedure and the overriding and additional DD statements that follow it would appear as:

The cataloged procedure would appear as shown below while the procedure is being executed. These modifications do not appear on output listing.

Appendix A

```
//SA
          EXEC PGM=ANALY
//DDA1
               DSNAME=PROJ.0843, DISP=OLD
          DD
//DDA2
          DD
//DDA3
          DD
               UNIT=1403, DISP=NEW
          EXEC PGM=MANMO3
//SB
//DDB1
               UNIT=2400
          DD
//DDB2
          DD
               UNIT=2400
//DDB3
          DD
               DSNAME=X54, VOLUME=SER= (36544,36545),
                                                                    X
11
               UNIT= (2400, 2), DISP=(OLD, KEEP)
//DDB4
          DD
                UNIT=(2400,,SEP=(DDB1,DDB2))
```

2. You want to call the following in-stream procedure named WORK:

```
//WORK PROC
//STP1 EXEC PGM=PROD
//DD1 DD DSNAME=PROJECT, DISP=OLD
//DD2 DD DDNAME=SYSIN
PEND
```

You want to modify the procedure by supplying the data set definition for the DD2 statement by adding a DD statement.

The EXEC statement that calls the procedure and the additional DD statement that follows it would appear as

```
//ADD EXEC WORK
//STP1.SYSIN DD *

data

.
.
.
```

The in-stream procedure would appear as shown below while the procedure is being executed. These modifications do not appear on the output listing.

```
//STP EX EC PGM=PROD
//DD1 DD DSNAME=PROJECT, DISP=OLD
//DD2 DD *
```

Writing Procedures: Cataloged and In-Stream

Why Catalog Job Control Statements

Applications performed at your installation on a regular basis and applications that require many control statements can be simplified when the control statements for these applications are cataloged. Once the job control statements for an application are cataloged on the procedure library, any programmer who wants to perform the application need only submit a JOB and EXEC statement. On the EXEC statement, he refers the system to the control statements required to perform the application. If there are modifications the programmer wants to take for the duration of the job step, he assigns values to symbolic parameters on the EXEC statement and follows the EXEC statement with overriding DD statements.

Why Use In-Stream Procedures

In-stream procedures appear within the job stream instead of in the procedure library. Like cataloged procedures, they eliminate the necessity of repeating the same set of control statements in a job. An in-stream procedure can be executed any number of times during a job in which it appears and fifteen uniquely named in-stream procedures can appear in one job. In-stream procedures can be modified just as cataloged procedures. They also provide you with a means of testing procedures before adding them to the procedure library as cataloged procedures. Because an in-stream procedure may exist in the form of cards, it can be considered a "portable procedure" in that it can easily be moved from one input stream to another.

THE CONTENTS OF CATALOGED AND IN-STREAM PROCEDURES

Cataloged and in-stream procedures contain one or more EXEC statements, each followed by associated DD statements. Each EXEC statement identifies the program to be executed, and the DD statements that follow define the input, output, and work data sets to be used by the program. Each EXEC statement and its associated DD statements are called a procedure step.

Cataloged and in-stream procedures cannot contain:

- 1. EXEC statements that refer to other cataloged procedures.
- 2. JOB, delimiter, or null statements.
- 3. DD statements with the ddname JOBLIB.
- 4. DD statements with * or DATA coded in the operand field.

A cataloged or in-stream procedure can contain a DD statement with the ddname STEPLIB. If a procedure step requires use of a program in a private library other than SYS1.LINKLIB, you define that library on this DD statement. If the DD statement is not overridden when the procedure is called, it makes the private library available to the step. (For information on the STEPLIB DD statement, see the chapter "Special Ddnames" in Section IV of this publication.)

For ease in modifying a cataloged or in-stream procedure, you can include symbolic parameters in the procedure. How to use symbolic parameters is described next.

Appendix A

USING SYMBOLIC PARAMETERS IN A PROCEDURE

A symbolic parameter is characterized by a name preceded by an ampersand (a) and appears in the operand field of a cataloged procedure statement. A symbolic parameter stands for a parameter, a subparameter, or a value.

Symbolic parameters allow a programmer who calls the procedure to e easily modify the procedure for the duration of the job step. When the programmer calls the procedure, he assigns values to the symbolic parameters on the EXEC statement. When you prepare control statements that you plan to catalog, you can include a PROC statement and assign default values to any of the symbolic parameters that are included. When you prepare control statements to be used as an in-stream procedure, you must include a PROC statement which can be used to assign default values to any of the symbolic parameters that are included.

A symbolic parameter is one to seven alphameric and national (#,a,\$) characters preceded by a single ampersand. The first character must be alphabetic or national. Since a single ampersand defines a symbolic parameter, you code double ampersands when you are not defining a symbolic parameter. For example, if you want to pass 543&LEV to a processing program by means of the PARM parameter on an EXEC statement, you must code PARM='543&&LEV'. The system treats the double ampersands as if a single ampersand has been coded, and only one ampersand appears in the results.

The following are examples of symbolic parameters:

//STEP1 EXEC PGM=COB, PARM= P1, & P2, P3

//DD1 DD DSNAME=&&FIX,UNIT=&DEVICE,SPACE=(CYL,(&SPACE,10))

//DD2 DD DSNAME=&&CHAG,UNIT=2400,DCB=BLKS IZ E=&LENGTH

Keyword parameters that can be coded on an EXEC statement cannot be used to define symbolic parameters. For example, &PGM and ®ION cannot be used as symbolic parameters. The system will not recognize a symbolic parameter if you enclose it in apostrophes, unless it is part of the PARM parameter.

Any parameter, subparameter, or value in the procedure that may vary each time the procedure is called is a good candidate for definition as a symbolic parameter. For example, if different values can be passed to a processing program by means of the PARM parameter on one of the EXEC statements, you might define the PARM parameter field as one or more symbolic parameters, PARM=&ALLVALS or PARM=&DECK&CODE.

If symbolic parameters are defined in the cataloged or in-stream procedures used at your installation, the definitions should be consistent. For example, every time the programmer is to assign his department number to a symbolic parameter, no matter which procedure he is calling, the symbolic parameter could be defined as &DEPT. In different procedures you could code ACCT=(43877,&DEPT) and DSNAME=LIBRARY.&DEPT.MACS. The programmer would assign his department number on the EXEC statement that calls the procedure whenever &DEPT appears in a procedure. Of course, in order for the programmer to know that he is to assign his department number to the symbolic parameter &DEPT, the installation must make this information available to all the programmers that may be using the cataloged procedures.

You can define two or more symbolic parameters in succession without including a comma to delimit the symbolic parameters, for example, & P1& P2. You can also define a portion of a parameter, subparameter, or value as a symbolic parameter. You do this by placing the symbolic parameter before, after, or in between the information that is not variable.

If you place a symbolic parameter after some information that does not vary, it is not necessary to code a delimiter. The system recognizes a symbolic parameter when it encounters the single ampersand.

If you place a symbolic parameter before some information that does not vary, a period may be required following the symbolic parameter to distinguish the end of the symbolic parameter and the beginning of the information that does not vary. A period is required following the symbolic parameter when:

- The character following the symbolic parameter is an alphabetic, numeric, or national character.
- The character following the symbolic parameter is a left parenthesis or a period.

In these cases, the system recognizes the period as a delimiter, and the period does not appear after a value is assigned to the symbolic parameter. (A period will appear after a value is assigned to the symbolic parameter when two consecutive periods are coded.)

The following examples are valid ways of combining symbolic parameters and information that does not vary.

Placing a symbolic parameter after information that does not vary:

- LIBRARY (&MEMBER)
- 2. USERLIB. &LEVEL

Placing a symbolic parameter before information that does not vary:

- ' &OPTION+15'
- 2. & PASS. A43B8

The period is required because an alphabetic character follows the symbolic parameter.

3. &URNO.54328

The period is required because a numeric character follows the symbolic parameter.

4. & LIBRARY. (MEMG)

The period is required because a left parenthesis follows the symbolic parameter.

&FILL..GROUP5

A period is to appear in the results; therefore, two consecutive periods are coded.

Appendix A

When a value is assigned to the symbolic parameter, this value and the parameter, subparameter, or value that this is a portion of cannot exceed 120 characters.

The programmer who calls a procedure assigns values to the symbolic parameters contained in the procedure. He can also nullify symbolic parameters. A delimiter, such as a leading comma or a trailing comma, next to a symbolic parameter is not automatically removed when the symbolic parameter is nullified. For example, if the operand field contains VOLUME=SER=(111111,&KEY), the comma preceding &KEY is not removed when &KEY is nullified. If the symbolic parameter that is nullified is a positional parameter, a comma must remain to indicate its absence. In other cases, a delimiter that is not removed when the symbolic parameter is nullified may cause a syntax error. To help the programmer who nullifies a symbolic parameter avoid this error condition, define those symbolic parameters that may be nullified without the delimiter. For example, you could code
VOLUME=SER=(1111111&KEY). The delimiter is included when a value is assigned to the symbolic parameter. For example, the programmer would code KEY=',222222'.

A cataloged or in-stream procedure statement may utilize DDNAME and DCB parameters to define data in the input stream. Such a statement should not contain symbolic parameters when the automatic SYSIN batching reader is used. (Information on the cataloged procedure for the automatic SYSIN batching reader is contained in the MFT and MVT Guides publication.

The PROC statement. When establishing cataloged or in-stream procedures that contain symbolic parameters it is generally good practice to assign default values to the symbolic parameters. These default values are used if the programmer who calls the procedure does not assign values to one or more of the symbolic parameters.

You assign default values on a PROC statement. The PROC statement is optional in cataloged procedures; if it is used, the PROC statement must be the first statement in the procedure. The PROC statement is described in Section X of this publication. The PEND statement which is used to mark the end of an in-stream procedure is described in Section IX.

ADDING AND MODIFYING CATALOGED PROCEDURES

You add procedures to the procedure library by using the IEBUPDTE utility program. You also use this utility program to permanently modify existing procedures. How to use this utility program for adding and modifying cataloged procedures is described in the chapter "The IEBUPDTE Program" in the Utilities publication.

When you add a cataloged procedure to the procedure library, that procedure cannot be executed before the job that adds it to the procedure library terminates. When you modify an existing cataloged procedure, the operator must be notified. What the operator must do before he allows the job to be executed is described in the chapter "How to Run Jobs That Update System Data Sets" in the Operator's Reference publication.

Appendix B

Appendix B: Using the Restart Facilities

When a job step abnormally terminates, you may have to resubmit the job for execution. This means lost computer time and a delay in obtaining the desired results. To reduce these effects, you can use the restart facilities.

If a job step abnormally terminates or if a system failure occurs, the restart facilities allow you to request that the job step be restarted either at the beginning of the step (step restart) or within the step (checkpoint restart). Furthermore, restart can occur automatically after abnormal termination, or it can be deferred until the job is resubmitted.

Restarts

For automatic step restart to occur, the RD parameter must request it on the JOB statement or on the EXEC statement associated with the step that abnormally terminates. (The RD parameter on the JOB statement is described in Section II of this publication; the RD parameter on the EXEC statement is described in Section III.) Automatic checkpoint restart can occur only if a CHKPT macro instruction is executed in the processing program prior to abnormal termination.

If restart is deferred until the job is resubmitted, the RESTART parameter must be coded on the JOB statement of the resubmitted job. (The RESTART parameter is described in Section II of this publication.) The RESTART parameter identifies the step or the step and the checkpoint at which execution is to be resumed. A deferred restart may be initiated regardless of how the resubmitted job was previously terminated (normally or abnormally) and regardless of whether an automatic restart occurred during the original execution.

AUTOMATIC STEP RESTART

If an abnormally terminated step is to be automatically restarted, the RD parameter must be coded as RD=R or RD=RNC. Execution resumes at the beginning of the abnormally terminated step.

AUTOMATIC CHECKPOINT RESTART

After an automatic checkpoint restart, execution resumes at the instruction immediately following the last CHKPT macro instruction that was successfully executed in the abnormally terminated step. An automatic checkpoint restart cannot occur if you suppress the action of the CHKPT macro instruction; you do this by coding RD=NC or RD=RNC. Also, an automatic checkpoint restart cannot occur if you code RD=NR; however, RD=NR allows the CHKPT macro instruction to establish a checkpoint.

DEFERRED STEP RESTART

To perform a deferred step restart, the RESTART parameter must identify the step at which execution is to be resumed. Steps preceding the restart step are interpreted but are not initiated. Since dispostion processing occurred during the original execution of the job, you may have to modify control statements associated with the restart step before you resubmit the job. Modifications may be required in two cases:

- A data set was defined as NEW during the original execution. If it
 was created during the original execution, you must change the data
 set's status to OLD, define a new data set, or delete the data set
 before resubmitting the job.
- 2. A data set was passed and was to be received by the restart step or a step following the restart step. If the passed data set is not cataloged, you must supply, in the receiving step, volume serial numbers, device type, data set sequence number, and label type. (Label type cannot be retrieved from the catalog.)

To limit the number of modifications required before you resubmit the job, you can assign conditional dispositions during the original execution. (Data sets assigned a temporary name or no name can only be assigned a conditional disposition of DELETE.) If deferred step restart will be performed, conditional dispositions should be used:

- To delete all new data sets created by the restart step.
- To keep all old data sets used by the restart step, other than those passed to the step. (If a nontemporary data set is defined as DISP=(OLD, DELETE), it is very important that you assign a conditional disposition of KEEP.)
- To catalog all data sets passed from steps preceding the restart step to the restart step or to steps following the restart step.

Additional changes can be made to your control statements before resubmitting the job. For example, you can vary device and volume configurations and request step restart on an alternate system with the same configuration as used originally. You can also make changes to your data.

DEFERRED CHECKPOINT RESTART

To perform a deferred checkpoint restart, the RESTART parameter must identify the step and the checkpoint at which execution is to be resumed. The SYSCHK DD statement, which defines the checkpoint data set, must also be included. (The SYSCHK DD statement is described in the chapter "Special Ddnames" in Section IV.)

An internal representation of your statements is kept as control information within the system. Some of the control information for the restart step or steps following the restart step may have to be modified before execution can be resumed at a checkpoint. The following modifications for the restart step are automatically made by the system, using information contained in the checkpoint entry:

- The status of data sets used by the step is changed from NEW to OLD.
 (If a new data set was assigned a nonspecific volume and had not been opened before the checkpoint was established, this change is not made.)
- If nonspecific volumes were requested for a data set used in the restart step, the assigned device type and volume serial numbers are made part of the control information.

Appendix B

 For a multivolume data set, the volume being processed when the checkpoint was established is mounted.

The only required modification that you must make to a control statement is to supply certain information about a data set that was being passed by a step preceding the restart step to a step following the restart step. You must supply, in the receiving step, volume serial numbers, device type, data set sequence number, and label type. You will not have to make these modifications if, during the original execution, you assigned a conditional disposition of CATLG to such data sets. If the data is cataloged, the system can retrieve this information from the catalog. (Label type cannot be retrieved from the catalog.) You should also use conditional dispositions to keep all data sets used by the restart step. Data sets assigned a temporary name or no name can only be assigned a conditional disposition of DELETE. Therefore, if you plan a deferred checkpoint restart, you should not define your data sets as temporary. (For any nontemporary data set that may be deleted, it is very important that you assign a conditional disposition of KEEP.)

Before resubmitting the job for checkpoint restart, you can make other modifications to control statements associated with the restart step or steps following the restart step. The following items apply to the step in which restart is to occur:

- The DD statements in the restart step can be altered, but the statements must have the same names as used originally. You can also include additional DD statements.
- If a data set was open at the time a checkpoint was established and restart is to begin at that checkpoint, DD statements in the restart step can define the same data set. If there is no need to process a data set after restart, you can define the data set by coding the DUMMY parameter or DSNAME=NULLFILE on a DD statement provided that:

 (1) the basic sequential access method (BSAM) or the queued sequential access method (QSAM) was being used to process the data set when the checkpoint was established, (2) the data set is not the checkpoint data set that is being used to restart the job step, and (3) the job step is not restarted from a checkpoint that was established in an end-of-volume exit routine for the data set. The name of the DD statement must be the same as the one used for the data set during the original execution of your program.
- If DUMMY is not specified, the DD statements must define the same data sets. Also, the data sets must not have been moved on the volume or onto another volume.
- If a data set was not open when the checkpoint was established and is not needed during restart, you can replace the parameters used to define the data set with the DUMMY parameter.
- You can alter the data in the restart step. If you omit the data, a
 delimiter statement (/*) is not required, unless the data was
 preceded by a DD DATA statement.

Modifications you might want to make to control statements following the restart step are: varying device and volume configurations, altering data, and possibly, requesting checkpoint restart on an alternate system with the same configuration as used originally. If the parameters PGM, COND, SUBALLOC, and VOLUME=REF refer to steps preceding the restart step, you must resolve these references before resubmitting the job. (A backward reference of VOLUME=REF is allowed if the referenced statement includes VOLUME=SER=(serial number).)

Examples of Using the Restart Facilities

 The following control statements illustrate the preparations that would be made for either an automatic step or checkpoint restart before the job is submitted for the first time.

```
//STMRG3 JOB 54321, A. USER, MSGLEVEL=(1,0), RD=R
           EXEC PGM=SIMPSOPT
//STEP1
                DSN=SORTIN, VOL=SER=100468, UNIT=2400,
//INPUT
                                                                       X
                DISP=(OLD,DELETE)
//
//OUT PUT
          DD
                DSN=INV(+1), UNIT=2311, VOL=SER=555334,
//
                SPACE=(3200, (200,100)), DISP=(NEW, CATLG)
           DD
//WORK1
                UNIT=2400, DISP=(NEW, DELETE)
//WORK2
           \mathbf{D}\mathbf{D}
                UNIT=2400, DISP=(NEW, DELETE)
                UNIT=2400, DISP=(NEW, DELETE)
//CHKPT
           DD
          EXEC PGM=MYMERGE
//STEP 2
           DD
                DSN=INV(+1), DISP=OLD
//MERG1
                DSN=M5, VOL=SER= (092501,092502,092503),
//MERG2
                UNIT=(2400, 3), DISP=(OLD, KEEP)
                                                                       X
//RESULTS DD
                DSN=M6, UNIT=2400, VOL=SER=(100101, 100102,
                100103), DISP=(NEW, KEEP)
```

Here, the RD parameter requests step restart for any abnormally terminated job step. In STEP1, the DD statement CHKPT defines a checkpoint data set. For this step, once a CHKPT macro instruction is executed, only automatic checkpoint restart is performed. An automatic checkpoint restart cannot occur in STEP2 since a checkpoint data set is not defined.

 The following control statements illustrate the preparations that would be made for either an automatic or deferred step restart before the job is submitted for the first time.

```
//STMRG3
          JOB 54321, A. USER, MSGLEVEL=(1,0), RD=R
          EXEC PGM=SIMPSORT
//STEP1
//INPUT
                DSN=SORTIN, VOL=SER=100468, UNIT=2400,
                DISP=(OLD, DELETE, KEEP)
//OUTPUT DD
                DSN=INV(+1), UNIT=2311, VOL=SER=555334,
                                                                      X
                SPACE=(3200, (200, 100)), DISP=(NEW, CATLG, DELETE)
//WORK1
         DD
                UNIT=2400, DISP= (NEW, DELETE)
                UNIT=2400, DISP=(NEW, DELETE)
//WORK2
          DD
//STEP2
          EXEC PGM=MYMERGE
                DSN=M5, VOL=SER=(092501,(092502,092503),
                                                                      X
//MERG2
                UNIT= (2400,3), DISP=(OLD, KEEP)
//RESULTS DD
                                                                      X
                DSN=M6, UNIT=2400, VOL=SER= (100101, 100102,
                100103), DISP=(NEW, KEEP, DELETE)
```

If you are resubmitting this job for step restart, you must code the RESTART parameter on the JOB statement and identify the step at which execution is to be resumed. If execution is to be resumed with STEP2, the MERG1 DD statement must be changed to refer to the generation data set by means of its present relative generation number, i.e., DSN=INV(0).

3. The following control statements illustrate the preparations that would be made for an automatic step or checkpoint restart or a deferred checkpoint restart before the job is submitted for the first time.

```
//STMRG3
          JOB 54321, A. USER, MSGLEVEL=(1,0), RD=R
          EXEC PGM=SIMPSORT
//STEP1
//INPUT1
                DSN=SORTIN, VOL=SER=100468, UNIT=2400,
                                                                      X
//
                DISP=(OLD, DELETE, KEEP)
                DSN=INV(+1), UNIT=2311, VOL=SER=555334,
//OUT PUT
                                                                      X
          DD
                SPACE=(3200,(200,100)),DISP=(NEW,CATLG,KEEP)
//
//WORK1
          DD
                DSN=A, UNIT=2400, DISP=(NEW, DELETE, CATLG)
//WORK2
          DD
                DSN=B, UNIT=2400, DISP=(NEW, DELETE, CATLG)
//CHKPT
           DD
                DSN=O, UNIT=2400, DISP=(NEW, DELETE, CATLG)
          EXEC PGM=MYMERGE
//STEP 2
                DSN=INV(+1), DISP=OLD
//MERG1
          DD
          DD
                DSN=M5, VOL=SER= (092501,092502,092503),
                                                                      Х
//MERG2
                UNIT=(2400, 3), DISP=(OLD, KEEP)
//RESULTS DD
                DSN=M6, UNIT=2400, VOL=SER= (100101, 100102,
                                                                      Х
                100103), DISP=(NEW, KEEP)
```

Either an automatic checkpoint restart or a deferred checkpoint restart can occur in STEP1 if the step abnormally terminates. To perform a deferred checkpoint restart, the RESTART parameter must be coded on the JOB statement and a SYSCHK DD statement must be included before resubmitting the job. Only automatic step restart can occur in STEP2. The data sets that would normally be defined as temporary have been defined as nontemporary data sets so conditional dispositions can be assigned to them.

Appendix C: Creating and Retrieving Indexed Sequential Data Sets

Indexed sequential (ISAM) data sets are created and retrieved using special subsets of DD statement parameters and subparameters. Each data set can occupy up to three different areas of space:

- Prime area -- This area contains data and related track indexes. It exists for all indexed sequential data sets.
- Overflow area -- This area contains overflow from the prime area when new data is added. It is optional.
- 3. Index area -- This area contains master and cylinder indexes associated with the data set. It exists for any indexed sequential data set that has a prime area occupying more than one cylinder.

Indexed sequential data sets must reside on direct access volumes. The data set can reside on more than one volume and the device types of the volumes may in some cases differ.

Creating an Indexed Sequential Data Set

One to three DD statements can be used to define a new indexed sequential data set. When you use three DD statements to define the data set, each DD statement defines a different area and the areas must be defined in the following order:

- Index area.
- 2. Prime area.
- 3. Overflow area.

When you use two DD statements to define the data set, the areas must be defined in the following order:

Index area.
 Prime area

or

Prime area.
 Overflow area.

When you use one DD statement to define the data set, you are defining the prime area and, optionally, the index area.

When more than one DD statement is used to define the data set, assign a ddname only to the first DD statement; the name field of the other statements must be blank.

The only DD statement parameters that can be coded when defining a new indexed sequential data set are the DSNAME, UNIT, VOLUME, IABEL, DCB, DISP, SPACE, SEP, and AFF parameters. When to code each of these parameters and what restrictions apply are described in the following paragraphs.

Appendix C

THE DSNAME PARAMETER

The DSNAME parameter is required on any DD statement that defines a new temporary or nontemporary indexed sequential data set. To identify the area you are defining, you follow the DSNAME parameter with the area: DSNAME=name(INDEX), DSNAME=name(PRIME), or DSNAME=name(OVFLOW). If you are using only one DD statement to define the data set, code DSNAME=name(PRIME) or DSNAME=name.

When reusing previously allocated space to create an ISAM data set, the DSNAME parameter must contain the name of the old data set to be overlaid.

THE UNIT PARAMETER

The UNIT parameter is required on any DD statement that defines a new indexed sequential data set unless VOLUME=REF=reference is coded. You must request a direct access device in the UNIT parameter and must not request DEFER.

If there are separate DD statements defining the prime and index areas, you must request the same number of direct access devices for the prime area as there are volumes specified in the VOLUME parameter. You may request only one direct access volume for an index area and one for an overflow area.

A DD statement for the index area or overflow area can request a device type different than the type requested on the other statements.

Another way to request a device is to code UNIT=AFF=ddname; where the named DD statement requests the direct access device or device type you want. New direct access data sets imply deferred mounting. In this case, do not code UNIT=AFF.

THE VOLUME PARAMETER

The VOLUME parameter is required only if you want an area of the data set written on a specific volume or if the prime area requires use of more than one volume. (If the prime area and index area are defined on the same statement, you cannot request more than one volume on the DD statement. When a multiple volume prime area is required specific serial numbers must be specified.) Either supply the volume serial number or numbers in the VOLUME parameter or code VOLUME=REF=reference.

If you make a nonspecific volume request and the first volume searched does not have enough space available, the step may abnormally terminate, depending on the following circumstances:

- If you requested multiple volumes, space allocation is not fulfilled and the job step is terminated.
- If you requested a single volume and the DD statement containing the request is the first or only DD statement defining the data set, the system attempts to find another volume with sufficient space available.
- If you requested a single volume and the DD statement containing the request is the second or third DD statement defining the data set, space allocation is not fulfilled and the job step is terminated.

With both specific and nonspecific volume requests, you can also request a private volume with the PRIVATE subparameter and request that

the private volume be retained with the RETAIN subparameter. These subparameters are discussed in detail in the chapter on the VOLUME parameter.

Note: If a new ISAM data set is being created with a nonspecific volume request and it's DSNAME already exists on a volume(s) eligible for allocation, the job may fail due to duplicate names on the volume. Successful allocation, under these conditions, depends upon where the old data set resides in relation to eligible devices. Failures of this type can be corrected by either scratching the old data set or renaming the new data set before resubmitting the job.

THE LABEL PARAMETER

The LABEL parameter need only be coded to specify a retention period (EXPDT or RETPD) or password protection (PASSWORD).

THE DCB PARAMETER

The DCB parameter must be coded on every DD statement that defines an indexed sequential data set. At minimum, the DCB parameter must contain DSORG=IS or ORG=ISU. Other DCB subparameters can be coded to complete the data control block if it has not been completed by the processing program. When more than one DD statement is used to define the data set, code all the DCB subparameters on the first DD statement. Code DCB=*.ddname on the remaining statement or statements; ddname is the name of the DD statement that contains the DCB subparameters.

When reusing previously allocated space and recreating an ISAM data set, desired changes in the DCB parameter must be coded on the DD statement. Although you are creating a new data set, some DCB subparameters cannot be changed if you want to use the space that the old data set used. The DCB subparameters, you can change are: BFALN, BLKSIZE, CYLOFL, DSORG, HIARCHY, KEYLEN, LRECL, NCP, NTM, OPTCD, RECFM, and RKP.

THE DISP PARAMETER

If you are creating a new data set and not reusing preallocated space, the DISP parameter need only be coded if you want to keep, DISP=(,KEEP), catalog, DISP=(,CATLG), or pass, DISP=(,PASS), the data set. If you are reusing previously allocated space and recreating an ISAM data set, code DISP=OLD. The newly created data set will overlay the old one.

In order to catalog the data set when DISP=(,CATLG) is coded or pass the data set when DISP=(,PASS) is coded, the data set must be defined on only one DD statement. If the data set was defined on more than one DD statement and the volumes on which the data set now resides correspond to the same device type, you can use the IEHPROGM utility program to catalog the data set. Refer to the chapter "The IEHPROGM Program" in the Utilities publication for details.

THE SPACE PARAMETER

Nonspecific Allocation Technique

The SPACE parameter is required on any DD statement that defines a new indexed sequential data set. Use either the recommended nonspecific allocation technique or the more restricted absolute track (ABSTR) technique. If more than one DD statement is used to define the data set, all must request space using the same technique.

Appendix C

You must request the primary quantity in cylinders (CYL). When the DD statement that defines the prime area requests more than one volume, each volume is assigned the number of cylinders requested in the SPACE parameter.

One of the subparameters of the SPACE parameter, the "index" subparameter, is used to indicate how many cylinders are required for an index. When one DD statement is used to define the prime and index areas and you want to explicitly state the size of the index, code the "index" subparameter.

The CONTIG subparameter can be coded in the SPACE parameter. However, if CONTIG is coded on one of the statements, it must be coded on all of them.

You cannot request a secondary quantity for an indexed sequential data set. Also, you cannot code the subparameters RLSE, MXIG, ALX, and ROUND.

Absolute Track Technique

The number of tracks you request must be equal to one or more whole cylinders. The address of the beginning track must correspond with the first track of a cylinder other than the first cylinder on the volume. When the DD statement that defines the prime area requests more than one volume, space is allocated for the prime area beginning at the specified address and continuing through the volume and onto the next volume until the request is satisfied. (This can only be done if the volume table of contents of the second and all succeeding volumes is contained within the first cylinder of each volume.)

One of the subparameters of the SPACE parameter, the "index" subparameter, is used to indicate how many tracks are required for an index. The number of tracks specified must be equal to one or more cylinders. When one DD statement is used to define the prime and index areas and you want to explicitly state the size of the index, code the "index" subparameter.

If you also specify a number of tracks or cylinders to be used as a directory or index, the primary quantity you code will be the total number of tracks or cylinders assigned. Example: if SPACE=(CYL,(10,1)) is specified, 10 cylinders will be assigned.)

Note: If the indexed sequential data set is to reside on more than one volume and an error is encountered as the volumes are being allocated to the data set, follow this procedure before resubmitting the job: use the IEHPROGM utility program to scratch the data set labels on any of the volumes to which the data set was successfully allocated. This utility program is described in the chapter "The IEHPROGM Program" in the Utilities publication.

THE SEP OR AFF PARAMETER

The SEP or AFF parameter is coded only if you want channel separation from the area or areas defined on the preceding statement or statements in the group. In order for the areas to be written using separate channels, you must also request devices by their actual address, e.g., UNIT=190.

Area Arrangement of an Indexed Sequential Data Set

When you create an indexed sequential data set, the arrangement of the areas is based on two criteria:

- 1. The number of DD statements used to define the data set.
- 2. What area each DD statement defines.

An additional criterion is used when you do not include a DD statement that defines the index area:

3. Is an index size coded in the SPACE parameter of the DD statement that defines the prime area?

Appendix C

Figure 40 illustrates the different arrangements that can result based on the criteria listed above. In addition, Figure 40 indicates what restrictions apply on the number and types of devices that can be requested.

CRITERIA				
 1.Number of DD statements	2.Area defined on a DD statement	3.Index size coded?	RESTRICTIONS ON DEVICE TYPES AND NUMBER OF DEVICES REQUESTED.	RESULTING ARRANGEMENT OF AREAS
3	INDEX PRIME OVFLOW	-	None	Separate index, prime, and overflow areas.
2	INDEX PRIME	-	None	Separate index and prime areas. ¹
2	PRIME OVFLOW	No	None	Separate prime and overflow areas. An index area is at the end of the overflow area.
2	PRIME OVFLOW	Yes	The statement defining the prime area cannot request more than one device.	Separate prime and overflow areas. An index area is embedded in the prime area.
	PRIME	No	None	Prime area with index area at its end.²
1	PRIME	Ýes 	 Cannot request more than one device.	Prime area with embedded index area.

¹ºIf both areas are on volumes that correspond to the same device type, an overflow area is established if one of the cylinders allocated for the index area is only partially used. The overflow area is established in the unused portion of that cylinder.

1ºIf the unused portion of the index area is less than one cylinder, it is used as an overflow area.

Figure 40. Area Arrangement of Indexed Sequential Data Sets

Retrieving an Indexed Sequential Data Set

If all areas of an existing indexed sequential data set reside on volumes of the same device type, you can retrieve the entire data set with one DD statement. If the index or overflow resides on a volume of a different device type, you must use two DD statements. If the index and overflow reside on volumes of different device types, you must use three DD statements to retrieve the data set. The DD statements are coded in the following order:

- First DD statement defines the index area
- 2. Second DD statement defines the prime area
- 3. Third DD statement defines the overflow area

The only DD statement parameters that can be coded when retrieving an indexed sequential data set are the DSNAME, UNIT, VOLUME, DCB, and DISP parameters. When to code each of these parameters and what restrictions apply are described in the following paragraphs.

THE DSNAME PARAMETER

The DSNAME parameter is always required. If the data set was passed from a previous step, identify it by a backward reference.

THE UNIT PARAMETER

The UNIT parameter is required unless the data set resides on one volume and was passed or unless the data set was cataloged. You identify in the UNIT parameter the device type and how many of these devices are required.

If the data set resides on more than one volume and the volumes correspond to the same device type, you need only one DD statement to retrieve the data set. Request one device in the UNIT parameter per volume. If the index or overflow area of the data set resides on a different type of volume than the other areas, you must use two DD statements to retrieve the data set. On one DD statement, request the device type required to retrieve the index or overflow area. On the other DD statement, request the device type and the number of devices required to retrieve the prime area and the overflow area if the overflow area resides on the same device type. If the index and the overflow areas reside on different device types from the prime area, a third DD statement is needed.

THE VOLUME PARAMETER

The VOLUME parameter is required unless the data set resides on one volume and was passed or unless the data set was cataloged. Identify in the VOLUME parameter the serial numbers of the volumes on which the data set resides. Code the serial numbers in the same order as they were coded on the DD statements used to create the data set.

THE DCB PARAMETER

The DCB parameter must be coded unless the data set was passed from a previous step. The DCB parameter must always contain DSORG=IS or DSORG=ISU. Other DCB subparameters can be coded to complete the data control block if it has not been completed by the processing program.

Appendix C

THE DISP PARAMETER

The DISP parameter must always be coded. The first subparameter of the DISP parameter must be MOD or OLD. You can, optionally, assign a disposition as the second subparameter.

Example of Creating and Retrieving an Indexed Sequential Data Set

 The following job step includes the DD statements that could be used to create an indexed sequential data set. Each area of the indexed sequential data set is defined on a separate DD statement.

```
//OUTPUT4 EXEC PGM=INCLUDE
//GROUP1 DD
                DSNAME=PART86(INDEX), DISP=(, KEEP), UNIT=2314,
                                                                      X
                VOLUME=SER=538762, SPACE=(CYL, 10, CONTIG),
                                                                      X
                DCB=(DSORG=IS, RECFM=F, LRECL=80, RKP=1, KEYLEN=8)
11
                DSNAME=PART86(PRIME), DISP=(, KEEP), UNIT=2311,2),
11
//
                VOLUME=SER= (538763,538764),
                SPACE=(CYL, (25),, CONTIG), DCB=*.GROUP1
//
          DD
                DSNAME=PART86 (OVFLOW), DISP= (, KEEP), UNIT=2311,
                                                                      X
//
                                                                      X
                VOLUME=SER=538765, SPACE=(CYL,15,,CONTIG),
11
                DCB=*.GROUP1
```

The following job step includes the DD statements required to retrieve the indexed sequential data set created above.

```
//INPUT12 EX EC PGM=ADD

//RET4 DD DSNAME=PART86, DCB=DSORG=IS, UNIT=2314, X

// DISP=OLD, VOLUME=SER=538762

// DD DSNAME=PART86, DCB=DSORG=IS, UNIT=(2311, 3), X

DISP=OLD, VOLUME=SER=(538763, 538764, 838765)
```

Two DD statements are required to retrieve the data set because the index area resides on a volume of a different device type than the volumes on which the prime and overflow areas reside.

Appendix D: Creating and Retrieving Generation Data Sets

A generation data set is one of a collection of successive, historically related, cataloged data sets known as a generation data group. The system keeps track of each data set in a generation data group as it is created so that new data sets can be chronologically ordered and old ones easily retrieved.

To create or retrieve a generation data set, you identify the generation data group name in the DSNAME parameter and follow the group name with a relative generation number. When creating a generation data set, the relative generation number tells the system whether this is the first data set being added during the job, the second, the third, etc. When retrieving a generation data set, the relative generation number tells the system how many data sets have been added to the group prior to the current job.

A generation data group can consist of cataloged sequential, partitioned, indexed sequential (if the data set is defined on one DD statement), and direct data sets residing on tape volumes, direct access volumes, or both. Generation data sets can have like or unlike DCB attributes and data set organizations. If the attributes and organizations of all generations in a group are identical, the generations can be retrieved together as a single data set (up to 255 data sets can be retrieved in this way).

Before You Define the First Generation Data Set

Before you define the first generation data set, you must build a generation data group index. This index provides lower-level entries for as many generation data sets (up to 255) as you would like to have in your generation data group. The system uses these lower-level indexes to keep track of the chronological order of the generation data sets. The index must reside on the system residence volume, or an alternate control volume. You use the IEHPROGM utility program to build your index; this program is described in the chapter "The IEHPROGM Program" in the Utilities publication.

Another requirement of generation data groups is that a data set label must exist on the same volume as the index. The system uses this label to refer to DCB attributes when you define a new generation data set. There are two ways to satisfy this requirement: (1) create a model data set label before you define the first generation data set; or (2) use the DCB parameter to refer the system to an existing cataloged data set each time you define a new generation data set.

Creating a Model Data Set Label

To create a model data set label, you must define a data set and request that it be placed on the same volume as the generation data group index. This ensures that there is always a data set label on the same volume as the index to which the system can refer.

The name you assign to the data set may be the same or different than the name assigned to the generation data group. (If you assign the same name for both, the data set associated with the model data set label cannot be cataloged.) You may request a space allocation of zero tracks or cylinders. The DCB attributes you can supply are DSORG, RECFM, OPTCD, BLKSIZE, LRECL, KEYLEN, and RKP.

Appendix D

This is an example of creating a model data set label:

```
//DD1 DD DSNAME=PAY.WEEK, DISP=(NEW, KEEP), UNIT=2311, X
// VOLUME=SER=SYSRES, SPACE=(TRK, 0), DCB=(RECFM=FB, X
LRECL=240, BLKSIZE=960)
```

You need not create a model data set label for every generation data group whose indexes reside on the same volume. Instead, you may create one model data set label to be used by any number of generation data groups. If you create only one model, you should not supply any DCB attributes. When you create a generation data set, you specify the name of the model in the DCB parameter and follow the name with a list of all the DCB subparameters required for the new generation data set, i.e., DCB=(dsname, list of attributes).

Referring the System to a Cataloged Data Set

If there is a cataloged data set that resides on the same volume as your generation data group index and you are sure that data set will exist as long as you are adding data sets to your generation data group, you need not create a model data set label. When you create a generation data set, you specify the name of the cataloged data set in the DCB parameter, i.e., DCB=dsname. If all the DCB attributes are not contained in the label of the cataloged data set, or if you want to override certain attributes, follow the data set name with these attributes, i.e., DCB=(dsname, list of attributes).

Creating a Generation Data Set

When defining a new generation data set, you always code the DSNAME, DISP, and UNIT parameters. Other parameters you might code are the VOLUME, SPACE, LABEL, and DCB parameters.

<u>Note</u>: If you make a nonspecific request for a tape volume for a new generation data set and the data set is never opened, the system will catalog the data set with a volume serial number of blanks. This prevents you from retrieving an incorrect generation and thus maintains the integrity of the generation data group.

Tape generation data sets that were never opened and that were cataloged may only be uncataloged by specifying the data set name parameter in the format of generation data group name and the relative generation number or by using IEHPROGM.

THE DSNAME PARAMETER

In the DSNAME parameter, you code the name of the generation data group followed by a number enclosed in parentheses. This number must be 1 or greater. If this is the first data set you are adding to a particular generation data group during the job, code +1 in parentheses. Each time during the job you add a data set to the same generation data group, increase the number by one.

Any time you refer to this data set later in the job, you use the same relative generation number as was used earlier. At the end of the job, the system updates the relative generation numbers of all generations in the group to reflect the additions.

Note: Do not code the DSNAME parameter using index (alias) names, even if they do exist for the highest level index.

Unpredictable results may occur if using a relative generation number which causes the actual generation number to exceed G9999.

THE DISP PARAMETER

New generations are assigned a status of NEW and a disposition of CATLG in the DISP parameter, i.e., DISP=(NEW,CATLG). If you do not specify a disposition, or specify a disposition other than CATLG, the system assumes CATLG.

THE UNIT PARAMETER

The UNIT parameter is required on any DD statement that defines a new generation data set unless VOLUME=REF=reference is coded. In the UNIT parameter, you identify the type and number of devices you want (tape or direct access).

Another way to request a device is to code UNIT=AFF=ddname; where the named DD statement requests the device or device type you want.

THE VOLUME PARAMETER

You may assign a volume in the VOLUME parameter or let the system assign one for you. The VOLUME parameter can also be used to request a private volume (PRIVATE), to retain the private volume (RETAIN), and to indicate that more volumes may be required (volume count).

THE SPACE PARAMETER

The SPACE parameter is coded only when the generation data set is to reside on a direct access volume. The SPLIT or SUBALLOC parameter can be coded in place of the SPACE parameter if the data set's organization permits the use of these parameters.

THE LABEL PARAMETER

You can specify label type, password protection (PASSWORD), and a retention period (EXPDT or RETPD) in the LABEL parameter. If the data set will reside on a tape volume and is not the first data set on the volume, specify a data set sequence number. The expriation date from the model data set control block is used unless an expiration date is coded on the DD statement.

THE DCB PARAMETER

A model data set label that has the same name as the group name may exist. If this is so, and if the label contains all the attributes required to define this generation, you need not code the DCB parameter. If all the attributes are not contained in the label, or if you want to override certain attributes, code these attributes in the DCB parameter, i.e., DCB=(list of attributes).

If a model data set label has a different name than the group name and if the label contains all the attributes required to define this generation data set, only the name of the data set associated with the model data set label need be coded. Code the name in the DCB parameter, i.e., DCB=dsname. If all the attributes are not contained in the label, or if you want to override certain attributes, follow the data set name with these attributes, i.e., DCB=(dsname, list of attributes).

If a model data set label does not exist, you must code the name of a cataloged data set that resides on the same volume as the generation data group index, i.e., DCB=dsname. If all the attributes are not contained in the label for this data set, or if you want to override certain attributes, follow the data set name with these attributes, i.e., DCB=(dsname, list of attributes).

Appendix

Retrieving a Generation Data Set

To retrieve a generation data set, you always code the DSNAME and DISP parameters. Other parameters you might code are the UNIT, LABEL, and DCB parameters.

THE DSNAME PARAMETERS

In the DSNAME parameter, you code the name of the generation data group followed by a number enclosed in parentheses. The number coded is a relative generation number with zero (0) referring to the highest generation number present in the catalog prior to the start of the current job. A reference to the second highest generation number present, prior to job initiation, would be coded (-1). If you wish to refer to a new member that was created in an earlier step of this job code the same positive integer that was used when it was created.

When any data set member is referenced more than once in a job the later reference(s) will have the same relative generation number as the first reference, even if another generation has been added during the job.

Note: Relative generation numbers are based on the catalog, as it existed at job initiation, plus any changes made to it by cataloging new members of the data set during the job. If a member is uncataloged during the job the later use of that members, or earlier members, relative generation number(s) will result in incorrect data set references.

If you want to retrieve all generations of a generation data group by concatenating all existing data sets in the generation data group, starting with the most recent and ending with the oldest, with unit affinity to the most recent data set, you specify the generation data group name without a generation number, e.g., DSNAME=WEEKLY.PAYROLL. You can retrieve all generations as a single data set only if the attributes and organizations of all generations are identical.

THE DISP PARAMETER

The DISP parameter must always be coded. The first subparameter of the DISP parameter must be OLD, SHR, or MOD. You can, optionally, assign a disposition as the second subparameter. Using the disposition subparameter PASS can cause mishandling of a data set at job termination because a passed GDG cannot be received.

When retrieving all generations of a generation data group as a single data set, you should avoid coding PASS as the second subparameter. In all such retrievals the unit and volume information for each generation level will be obtained from the catalog and not via the pass mechanism.

THE UNIT PARAMETER

Code the UNIT parameter when you want more than one device assigned to the data set. Code the number of devices you want in the unit count subparameter, or, if the data set resides on more than one volume and you want as many devices as there are volumes, code P in place of the unit count subparameter.

THE LABEL PARAMETER

Code the LABEL parameter when the data set has other than standard labels. The expiration date from the model data set control block is used unless an expiration date is coded on the DD statement.

THE DCB PARAMETER

Code the DCB parameter when the data set has other than standard labels and DCB information is required to complete the data control block.

Resubmitting a Job for Restart

Certain rules apply when you refer to generation data sets in a job resubmitted for restart (the RESTART parameter is coded on the JOB statement).

<u>For step restart</u>: If step restart is performed, generation data sets that were created and cataloged in steps preceding the restart step must not be referred to in the restart step or in steps following the restart step by means of the same relative generation numbers that were used to create them. Instead, you must refer to a generation data set by means of its present relative generation number. For example, if the last generation data set created and cataloged was assigned a generation number of +2, it would be referred to as 0 in the restart step and in steps following the restart step. In this case, the generation data set assigned a generation number of +1 would be referred to as -1.

<u>For checkpoint restart</u>: If generation data sets created in the restart step were kept instead of cataloged (i.e., DISP=(NEW,CATIG,KEEP) was coded), you can, during checkpoint restart, refer to these data sets and generation data sets created and cataloged in steps preceding the restart step by means of the same relative generation numbers that were used to create them.

Reference:

1. Generation data sets can be created and retrieved using utility programs. How to do this is described in "Appendix E: Generation Data Groups" in the <u>Utilities</u> publication. Also described in this appendix is how to put indexed sequential data sets in a generation data group.

Example of Creating and Retrieving Generation Data Sets

1. The following job step includes the DD statements that could be used to add three data sets to a generation data group.

```
//STEPA
          EXEC PGM=PROCESS
                DSNAME=A.B.C(+1), DISP=(NEW, CATLG), UNIT=2400,
                                                                     X
//DD1
          DD
                VOL=SER=13846, LABEL= (,SUL)
11
//DD2
          DD
                DSNAME=A.B.C(+2), DISP=(NEW, CATLG), UNIT=2311,
                                                                      X
11
                VOL=SER=10311
//DD3
          DD
                DSNAME=A.B.C(+3), DISP=(NEW, CATLG), UNIT=2301,
//
                VOL=SER=28929, SPACE=(480,(150,20)), DCB=LRECL-120, X
//
                BLKSIZE=480)
```

The first two DD statements do not include the DCB parameter; therefore, a model data set label must exist on the same volume as the generation data group index and must have the same name as the generation data group (A.B.C). Since the DCB parameter is coded on the third DD statement, the attributes LRECL and BLKSIZE, along with the attributes included in the model data set label, are used.

Appendix D

The following job includes the DD statements required to retrieve the generation data sets defined above when no other data sets have been added to the generation data group.

//JWC	JOB	CLASS=B
//STEP1	EXEC	PGM=REPORT9
//DDA	DD	DSNAME=A.B.C(-2), DISP=OLD, LABEL=(, SUL)
//DDB	DD	DSNAME=A.B.C(-1), DISP=OLD
//DDC	DD	DSNAME=A.B.C(0), DISP=OLD

Appendix E: Default Parameter Values Supplied in the Input Reader Procedure

As your control statements are read and interpreted, the input reader assigns default values to specific parameters that are not coded and checks for violations of certain restrictions. The default values for specific parameters and the restrictions are specified in the cataloged procedure for the input reader.

The input reader is controlled by a reader/interpreter cataloged procedure supplied by IBM or the installation. The default parameter values and restrictions will probably differ in the IBM-supplied and the installation-supplied procedures.

How to Keep Track of the Default Values and Restrictions

Figure 40 lists the parameters for which default values are assigned when they are not coded on specific control statements. The default values assigned to these parameters when an IBM-supplied cataloged procedure is used are also listed. Space is left in the right-hand portion of the table so you can write in the default values that will be assigned when an installation-supplied procedure is used. Figure 40 also lists those restrictions that must be checked as the control statements are read and tells which apply when an IBM-supplied procedure is used. Space is left in the right-hand portion of the table so you can write in which of these restrictions apply when a installation-supplied procedure is used.

The page on which Figure 41 appears may be removed from the publication and placed in a convenient location, so that you and other programmers can refer to it.

Appendix E

Default Parameter Values					
 Parameter	Statement	TDM Cumplied	Installation-Supplied		
ralameter	5 ca cement	IBM-Supplied	Name:	Name:	
MSGCLASS	JOB	A			
MSGLEVEL	JOB	(0,1)		Ì	
PRTY	JOB	1			
REGION	JOB and EXEC	50K		Ì	
TIME	EXEC	30 minutes		1	
ROLL	JOB and EXEC	(YES, NO)		1	
UNIT (note 2)	DD	SYSDA	1	1	
SPACE (note 2)	DD	(TRK, (50,10))		1	
BLKSIZE (note 3)		(note 1)			
BUFNO (note 3)	DD	(note 1)			
Restrictions					
 Parameter or	Statement	 	Installati	on-Supplied	
Subparameter	Scatement	IBM-Supplied 	Name:	Name:	
Accounting Information Programmer's	JOB	not required			
Name BLP (note 4)	JOB DD	not required NL assumed			

|Notes:

 The default value differs in each of the three IBM-supplied procedures, as follows:

		Procedure Name	
	RDR	RDR400	RDR3200
BLKSIZE BUFNO	80 2	400 2	3200 1

- The default values for the UNIT and SPACE parameters are used when you do not include these parameters on a DD statement that defines a data set being routed through an output stream (i.e., the SYSOUT parameter is coded on the DD statement). These default values also apply to data sets being routed through an output stream during any automatic restart.
- 3. The default values for the DCB subparameters BLKSIZE and BUFNO are used when you do not include these subparameters on a DD statement that defines data in the input stream (i.e., DD * or DD DATA statement).
- 4. BLP is a subparameter in the LABEL parameter that requests that tape label processing be bypassed.

Figure 41. Default Values and Restrictions Supplied in the Supplied in the Input Reader Procedures

Appendix F: A Checklist

When you create or retrieve a data set, the system requires certain information. This information is supplied on the DD statement that defines the data set.

This appendix can be used as a checklist: As you code your DD statements, find the function you are performing in the left-hand column of Figure 42. Across from the function are two separate lists of parameters. These parameters describe the information that you must supply to the system and the information that you may have to supply. You can compare your DD statement with what is listed to make sure all the required information is available to the system.

Following Figure 42 are examples of the DD statements that might be used when performing functions described in the table. Each example is keyed by number to a particular block within the table. If you do not understand why a parameter is listed for the function, either look at the example that corresponds to the number within the block or refer to the parameter description in Section IV of this publication.

FUNCTION: Creating a Data Set	 Information That Always Required	Is	Information That May Be Require	
Temporary Data Sets			•	
Creating a Data Set on a Unit Record Device	UNIT	1	DCB UCS	2
Creating a Data Set on a Tape Volume	UNIT	3	DCB VOLUME LABEL	4
Creating a Data Set in the Output Stream	SYSOUT	5,6,7	DCB UNIT SPACE FCB UCS	8
Creating A Data Set on a Direct Access Volume	UNIT SPACE	9	DCB : VOLUME LABEL	10
Nontemporary Data Sets				
Creating a Data Set on a Tape Volume	UNIT DSNAME DISP	11	LABEL DCB VOLUME	12
Creating a Generation Data Set on a Tape Volume	DISP UNIT DSNAME	13	DCB LABEL VOLUME	14

Figure 42. A Checklist (Part 1 of 3)

Appendix F

 Creating a Nontemporary Data Set (con't)	 Information That Is Always Required		Informati That May Be Requir	i
Creating a Sequential Data Set on a Direct Access Volume (BSAM or QSAM)		L5	LABEL DCB VOLUME	16
Creating a Data Set With Direct Organization on a Direct Access Volume (BDAM)	DSNAME	L7	LABEL VOLUME	18
Creating a Partitioned Data Set on a Direct Access Volume (BPAM)	, , , , , , , , , , , , , , , , , , , ,	L9	LABEL VOLUME DCB	20
Creating a New Member for a Partitioned Data Set	DISP 2 DSNAME	21	UNIT VOLUME	22
Creating a Data Set With Indexed Sequential Organi- zation on a Direct Access Volume (QISAM)	UNIT DSNAME DISP DCB SPACE	23	VOLUME LABEL	24
Creating a Generation Data Set on a Direct Access Volume	SPACE DISP UNIT DSNAME	25	DCB LABEL VOLUME	26
FUNCTION: Retrieving a Data Set				
Retrieving a Cataloged Data Set	DSNAME 2 DISP	27	DCB LABEL UNIT	28
Retrieving a Noncataloged Data Set on a Tape Volume	DSNAME CONTROL OF CONT	29	LABEL DCB	30
Retrieving a Noncataloged Sequential Data Set on a Direct Access Volume (BSAM or QSAM)	UNIT VOLUME DSNAME DISP	31	LABEL	32
Retrieving a Noncataloged Data Set with Direct Organization on a Direct Access Volume (BDAM)	UNIT VOLUME DSNAME DISP	33	LABEL	34
Retrieving a Member of a Partitioned Data Set (BPAM)	DISP DSNAME	35	UNIT VOLUME	36

Figure 42. A Checklist (Part 2 of 3)

App	bend	ix

Retrieving a Data Set	 Information That Is Always Required	j	Information That May Be Required
Retrieving a Data Set With Indexed Sequential Organization on a Direct Access Volume (QISAM or BISAM)	DSNAME UNIT VOLUME DCB DISP	37	
Retrieving a Passed Data Set	DSNAME 3 DISP	38	LABEL 39 DCB VOLUME UNIT
Retrieving a Generation Data Set	DSNAME O	40	DCB 41 LABEL UNIT

Figure 42. A Checklist (Part 3 of 3)

Examples

```
//DDA
            DD
                UNIT=1404
                UNIT=1403, UCS=PCAN, DCB=PRTSP=2
   //DDB
            DD
3
   //DDC
            DD
                UNIT=2400
    //DDD
            DD
                UNIT=2400-1, DCB=DEN=1, VOLUME=SER=14187, LABEL=2
5
    //DDE
            DD
                SYSOUT=L
    //DDF
            DD
                SYSOUT=G, DCB=PRTSP=2
   //DDG
            DD
                SYSOUT=(M, 7956)
8
    //DDH
                SYSOUT=B, UNIT=2301, SPACE= (1024, (75, 25)),
            DD
                                                                           Х
               DCB=BLKSIZE=2048
9
    //DDI
            DD UNIT=SYSDA, SPACE=(TRK, (20,5))
                UNIT=2311, SPACE=(CYL, (2,1)), DCB=(RECFM=S, LRECL=X),
10
   //DDJ
                                                                           X
               LABEL=(,SUL), VOLUME=SER=190853
    //
11 //DDK
            DD UNIT=2400, DSNAME=OUT, DISP=(NEW, KEEP)
12
   //DDL
               UNIT=2400-2, DSNAME=WLK18, DISP=(, KEEP), LABEL=(, NL),
                                                                           X
            DD
               DCB=TRTCH=C, VOLUME=SER=1540
    //
13 //DDM
            DD DISP=(,CATLG),UNIT=2400,DSNAME=WEEK.PAY(+1)
14
                                                                           X
  //DDN
               DISP=(,CATLG),UNIT=2400-1,DSN=YEAR.MON(+1),
               LABEL=(,SUL),DCB=A.B.C,VOLUME=SER=GDG18
    //
```

```
//DDO
            DD UNIT=2311, DSNAME=LNG, DISP=(, KEEP), SPACE=(TRK, (12,2))
15
            DD UNIT=2314, DSNAME=CLB, DISP=(, CATLG),
16
   //DDP
                SPACE=(1024,(100,25)), LABEL=(,SUL,,EXPDT=70180),
                                                                           X
    //
    11
                VOL=SER=S12148,DCB=(BLKSIZE=240,RECFM=FB,LRECL=60)
  //DDQ
            DD UNIT=2311, DS NAME=JCD, DISP=(NEW, KEEP),
                                                                           X
17
                SPACE=(CYL, (8,1)), DCB=DSORG=DA
    //
   //DDR
            DD UNIT=2302, DSN=MT12, DISP=(, PASS),
                                                                           X
                SPACE=(1024, (200,10)), DCB=(DSORG=DA, BLKSIZE=200,
    //
                                                                           X
                KEYLEN=4, RECFM=F), LABEL=(,SUL), VOLUME=SER=49878
    //
    //DDS
            DD UNIT=2302.DSNAME=PDS14.DISP=(NEW.KEEP).
                                                                           X
                SUBALLOC=(CYL, (20,1,3), STEP1.DD1)
    //
20
   //DDT
            DD UNIT=2314, DSNAME=AHTRY, DISP=(, CATLG),
                                                                           X
                SPACE=(CYL, (8,2,2)), LABEL=(,, PASSWORD)
                                                                           X
    //
    //
                VOLUME=SER=158491, DCB=(RECFM=F, LRECL=80)
   //DDU
            DD DSNAME=AHTRY(SET4),DISP=OLD
    //DDV
            DD UNIT=2302, VOLUME=SER=X13912, DISP=OLD,
                                                                           X
    //
                DSNAME=SHTR (MEMB2)
            DD UNIT=2311.DSNAME=DAT(PRIME),DISP=(NEW, KEEP),
    //DDW
                                                                           X
                DCB=DSORG=IS, SPACE=(CYL, (5,,1))
24
            DD UNIT=2302, DSN=ISQ (PRIME), DISP= (, KEEP), DCB= (DSORG=IS,
   //DDX
                                                                           X
    //
                BLKSIZE=240,CYLOFL=1,OPTCD=MYLR,RECFM=FB,LRECL=60,
                                                                           X
    //
                RKP=19, KEYLEN=10), SPACE=(CYL,2), VOL=SER=535861,
                                                                           X
               LABEL=EXPDT=70301
    //
    11
            DD UNIT=2302, DS N=ISQ (OVFLOW), DISP=(,KEEP), DCB=*. DDX,
                                                                           X
                SPACE=(CYL,1), VOL=SER=538267, LABEL=EXPDT=70301
    //
25 //DDY
            DD DSNAME=PAY.WEEK(+1),DISP=(,CATLG),UNIT=2314,
                                                                           X
    11
                SPACE=(TRK,(3,2))
   //DDZ
            DD DSN=INV.FORM8(+2),DISP=(,CATLG),UNIT=2311,
                VOLUME=SER=SA2103, LABEL=(,SUL), DCB=(MODEL2, RECFM=F,
    //
                                                                           X
    //
                LRECL=80), SPACE=(CYL, (2,1))
27 //DD1
            DD DSNAME=A.B.C.DISP=OLD
28 //DD2
            DD DSN=KELL12, DISP=OLD, LABEL=(, NSL), UNIT=(,P),
                                                                           X
    //
                DCB=(BUFNO=4, HIARCHY=1)
29
   //DD3
            DD
                 DSNAME=FILE18, UNIT=2400, DISP=OLD, VOL=SER=96977
   //DD4
            DD DSNAME=MILS, UNIT=2400-2, DISP=(OLD, PASS), VOL=SER=9818,
30
                LABEL=(,NSL),DCB=(BLKSIZE=1600,LRECL=80)
    //
   //DD5
               DSNAME=GLOSS, DISP=OLD, UNIT=2311, VOLUME=SER=P14992
             DD
32
   //DD6
                 DSNAME=LAB14, UNIT=2301, DISP=OLD, VOLUME=SER=H69568,
                                                                           X
                LABEL=(,SUL,,IN)
    //
```

Appendix F

Section XII: Glossary

* parameter: This parameter is coded as the first parameter on a DD statement that precedes data in the input stream.

<u>ACCT parameter</u>: This parameter is used to supply accounting information for a job step to an installation accounting routine and is coded on an EXEC statement.

<u>AFF parameter</u>: This parameter is used to request the same channel separation from certain data sets as was requested earlier in the job step. The AFF parameter is coded on a DD statement.

<u>alias</u>: An alternate name that may be used to refer to a member of a partitioned data set.

<u>allocation</u>: The process of assigning a resource to a job step.

automatic restart: A restart of a job after a job step abnormally terminates. The restart takes place during the current run, that is, without resubmitting the job.

automatic volume recognition (AVR): A feature that allows the operator to mount labeled volumes on available input/output devices before those volumes are required by a job step.

<u>auxiliary storage</u>: Data storage other than main storage; secondary storage.

background job: A job that is entered
through a time sharing terminal by means of
the SUBMIT command or through the input
stream (SYSIN).

backward reference: A facility of the job control language that permits you to copy information or refer to DD statements that appear earlier in the job.

block prefix: An optional field that may precede the first or only record in a block. For D-format records, the block prefix can contain the actual block length.

catalog:

 The collection of all data set indexes maintained by data πanagement. Each entry contains a data set name and volume and unit information about the data set. 2. To place an entry fcr a data set in the catalog. Tc specify this cn a control statement, code DISP=(status,CATLC) on the DD statement that defines the data set you want cataloged. You can retrieve a data set using less information on the DD card if the data set is cataloged.

cataloged data set: A data set that is represented in an index or hierarchy of indexes in the system catalog, the indexes provide the means for locating the data set.

cataloged procedure: A set of job control statements that has been assigned a name and placed in a partitioned data set known as the procedure library. To use a cataloged procedure, code the procedure name on an EXEC statement.

checkpoint/restart: A facility of the operating system that can minimize time lost in reprocessing a jcb step that abnormally terminated. The CHKPT macro instruction, the RESTART parameter on the JCB statement, and the RD parameter on the JCB or EXEC statement are associated with this facility.

checkpoint restart: A restart within a job step. The restart may be automatic (depending on an eligible completion code and the operator's consent) or deferred, where deferred involves resubmitting the job and coding the RESTART parameter on the JOB statement of the resubmitted job.

CLASS parameter: This parameter is used to assign a jcb class to your jcb and is coded on a JCB statement. In multiprogramming systems, jcbs within a jcb class are initiated according to their priority numbers.

command statement: A jcb statement that is
used to issue commands to the system
through the input stream.

comment statement: A jcb control statement used to contain information that may be helpful to yourself or another person that may be running your jcb or reviewing your output listing.

concatenated data sets: A group of input
data sets that are treated as one data set
for the duration of a job step.

<u>COND parameter</u>: This parameter is used to test return codes issued by the processing programs; any test that is satisfied causes the job to be terminated or a job step to be bypassed. The COND parameter is coded on a JOB or EXEC statement.

control volume: A volume that contains one
or more indexes of the catalcq.

data control block (DCB): A control block
used to contain certain attributes required
by an access method to store or retrieve a
data set. The DCB parameter is one means
of supplying attributes.

<u>CATA parameter</u>: This parameter is coded as the first parameter on a DD statement that precedes data in the input stream when the data contains job control statements.

data set: An organized collection of
related data in one of several prescribed
arrangements. The information required to
store and retrieve this data is defined on
a DD statement.

data set control block: A data set label
for a data set on a direct access volume.

<u>data set label</u>: A collection of information that describes the attributes of a data set. The data set label for a data set is normally on the same volume as the data set it describes.

DCB: See data control block.

<u>CCB parameter</u>: This parameter is used to supply attributes about the data set that are needed to complete the data control block. The DCB parameter is coded on a DD statement.

<u>C format</u>: A data set format in which ASCII records are variable lengths.

<u>CD</u> (data definition) statement: A job control statement that defines a data set that is being created or retrieved in a job step. CD statements follow an EXEC statement.

ddname (data definition name): A name
assigned to a DD statement. This name
corresponds to the ddname appearing in a
data control block.

<u>CDNAME parameter</u>: This parameter is used to postpone the definition of a data set until later in the same job step and is coded on a DD statement.

<u>deferred restart</u>: A restart that is performed when a jcb is resulmitted and the RESTART parameter is coded on the JOB statement of the resubmitted jcb.

delimiter statement: A jcb control
statement used to mark the end of data.
The characters /* appear in columns 1 and 2
of this control statement.

<u>device type</u>: A number that corresponds to a type of input/cutput device. Coding the device type in the UNIT parameter is one way of indicating what input/cutput device you want allocated to a job step.

<u>direct access device</u>: An auxiliary storage device in which the access time is effectively independent of the location of the data set.

direct data set: A data set whose records are in random order on a direct access volume. Each record is stored or retrieved according to its actual address or its address relative to the beginning of the data set.

<u>directory:</u> A series of 256-byte records at the beginning of a partitioned data set that contains an entry for each member in the data set.

DISP parameter: This parameter is used to describe the status of the data set and indicates what should be done with the data set after termination of the job step that processes it, or at the end of the job. The DISP parameter is coded on a ID statement.

dispatching pricrity: The number assigned to a task, which in a multitask environment, determines the order in which the tasks may use main storage and CPU resources.

<u>DLM parameter</u>: This parameter defines a special delimiter to be used to terminate a group of data in the input stream.

<u>DPRTY parameter</u>: This parameter is used to assign a dispatching pricrity to a jck step and is coded on an EXEC statement.

DSN parameter: This parameter is used to assign a name to a new data set or to identify an existing data set and is coded on a DD statement. Coding DSN is the same as coding DSNAME.

<u>DSNAME parameter</u>: This parameter is used to assign a name to a new data set or to identify an existing data set and is coded on a DD statement. Coding DSNAME is the same as coding DSN.

<u>CUMMY parameter</u>: This parameter is used to tell the system that the processing program should be executed, but no input or output operations should be performed on a particular data set. The DUMMY parameter is coded as the first parameter on a DD statement.

<u>EYNAM parameter</u>: For TSO, this parameter is used to specify that dynamic allocation of data sets is to be used. This allows you to defer definition of data set until you require it. If DYNAM is used in the background (batch environment), it means the same as DUMMY. The DYNAM parameter is coded on a DD statement.

dynamic storage: That portion of main
storage that is subdivided into partitions
or regions for use by the programs
associated with job steps and some system
tasks.

Exclusive control of a data set: This means that only one job at a time can process a data set. A request for an exclusively controlled data set will not be processed until the job with control terminates. Also a request for the data set name itself will not be processed -- even though the name may not refer to the same physical data set.

EXEC (execute) statement: A job control statement that marks the beginning of a job step and identifies the program to be executed or the cataloged or in-stream procedure to be used.

extent: A contiguous area of storage on a direct access volume in which a data set resides. A data set may reside in more than one area of storage on one or more volumes.

<u>F format</u>: A data set format in which the logical records are the same length.

FCB parameter: This parameter is used to specify the forms control image you want to use to print an output data set on a 3211 printer. The FCB parameter is coded on a LD statement.

<u>fixed-length record</u>: A record having the same length as all other records with which it is logically or physically associated.

foreground: The environment in which programs invoked by commands are performed. Programs are swapped in and cut of main storage as necessary to efficiently utilize main storage.

foreground job: Any job executing in a
foreground region, such as a command
processor or a terminal user's program.
Also called a "terminal job."

generation data group: A collection of
data sets that are kept in chronological
order; each data set is called a
generation. The DSNAME parameter is used
to define the generation you are creating
or retrieving.

generation data set: One generation cf a
generation data group.

group name: A 1- to 8-character name that
identifies a device or a collection of
devices. Coding a group name in the UNIT
parameter is one way of indicating what
type of input/output device you want
allocated to a job step.

index:

- A table in the catalog used to locate data sets.
- A table used to locate the records of an indexed sequential data set.

indexed sequential data set: A data set on one or more direct access volumes whose records contain a key portion, and the location of each record depends on the contents of the key portion. The location of each record is computed through the use of an index.

initiation: The process cf selecting a job step for execution and allocating input/output devices for the jcb step.

input job queue: A queue cf summary
information cf job control statements
maintained by the job scheduler, from which
it selects the jobs and job steps to be
processed.

input stream: The sequence of control statements and data submitted to the operating system on an input device especially activated for this purpose by the operator.

In-stream procedures: A set of job control statements, beginning with a PROC statement and ending with a PEND statement, that have been placed in the input stream. An in-stream procedure can be executed any number of times during the job in which it appears.

<u>job</u>: A total processing application that consists of one or more processing programs required to perform the application. A job is identified by a JOE statement.

JOB statement: A job control statement that marks the beginning of a job, and when jobs are stacked in the input stream, marks the end of the control statements for the preceding job.

job class: An alphabetic character of A through O that characterizes the type of job you are submitting. Each jcb class is defined by the installation; you indicate the type of job you are submitting in the CLASS parameter on the JOB statement. In multiprogramming systems, jcbs within a job class are initiated according to their priority numbers.

job control lanquage: A high-level
programming language used to code job
control statements, which describe a job to
the operating system and inform the system
of how the job is to be processed.

job control statement: Any one of the control statements in the input stream that identifies a job or defines its requirements.

job library: See private library.

job management: A general term that collectively describes the functions of the job scheduler and master scheduler.

job processing: The reading of control
statements and data from an input stream,
the initiating of job steps defined in
these statements, and the writing of system
output messages.

job scheduler: A control program function
that controls input streams and system
output, obtains input/output devices for
jobs and job steps, and regulates the use
of the computing system by jcbs. The job
scheduler is made up of the
reader/interpreter, initiator/terminator,
and output writer.

job step: The unit of work associated with
one processing program or one cataloged or
in-stream procedure, and related data. A
job consists of one or more job steps.

JOBLIB: A special ddname that when specified on a DD statement indicates to the system that you are defining a private library.

jobname: The name assigned to a JOB statement; it identifies the job to the system.

K: 1024 bytes.

keyword: A symbol that identifies a
parameter or subparameter.

keyword parameter: A parameter that
consists of a keyword followed by an equal
sign, followed by a single value or a list
of subparameters. Keyword parameters must
follow positional parameters in the operand
field of a job control statement, but the
keyword parameters may appear in any order.

<u>IABEI parameter</u>: This parameter is used:
(1) to describe the data set label associated with the data set; (2) to describe the sequence number of a data set that does not reside first on a reel; (3) to assign a retention period; (4) to assign password protection; and (5) to override the CPEN macro instruction (ESAM only). The IABEI parameter is coded on a DD statement.

<u>library:</u>

- 1. In general, a collection of information associated with a particular use, and the location of which is identified in a directory of some type. In this context, see link library, private library, system library.
- 2. Any partitioned data set.

<u>limit priority</u>: A priority associated with every task in an MVT system, representing the highest dispatching priority that the task may assign to itself or to any of its subtasks.

link library: A partitioned data set named SYS1.IINKIIB. Each member is a processing program and is called in the PGM parameter on the EXEC statement or in the ATTACH, LINK, IOAD, and XCTL macro instructions.

logical record: A record that is defined in terms of the information it contains rather than by its physical traits. You may have to specify the length of the logical record to complete the data control block; one way to specify this is in the LRECI subparameter of the DCE parameter.

main storage: All addressable storage from
which instructions can be executed or from
which data can be loaded directly into
registers.

main storage hierarchy support: An option that divides πain storage into two blocks known as hierarchies; hierarchy 0 is assigned to processor storage and hierarchy 1 to the IBM 2361 Core Storage unit.

master scheduler: The part of the control program that responds to operator commands and returns required information.

member: An independent, sequentially
organized data set identified by a unique
name in a data set directory.

Message Control Program (MCP): A set of user-defined TCAM routines that identify the teleprocessing network to the IBM System/360 Operating System, establish the line control required for the various kinds of stations and modes of connection, and control the handling and routing of

messages in accordance with the user's requirements.

MFT (multiprogramming with a fixed number of tasks): A control program that provides priority scheduling of a fixed number of tasks. A priority scheduler is used in MFT.

MSGCLASS parameter: This parameter is used to assign an output class to the system messages for your job and is coded on a JCB statement.

MSGLEVEL parameter: This parameter is used to indicate what job control statements and allocation/termination messages you want displayed as output from your job and is coded on a JOB statement.

multiprogramming: Executing more than one
job step concurrently.

<u>mutually exclusive</u>: The term applied to two parameters that cannot be coded on the same job control statement.

MVT (multiprogramming with a variable number of tasks): A control program that provides priority scheduling of a variable number of tasks. A priority scheduler is used in MVT.

MVT with Model 65 multiprocessing: An extension of MVI. This control program is used with the Model 65 multiprocessing (M65MP) system.

M65MP: See MVI with Model 65 multiprocessing.

name: A 1- to 8-character term, beginning
with an alphabetic or national (#, a, \$)
character, that identifies a data set, a
control statement, a program, or a
cataloged or in-stream procedure.

nonspecific volume request: A request for volumes that allows the system to select suitable volumes. This type of request can only be made when defining an output data set.

nontemporary data set: A new data set that
exists after the job that created it
terminates.

NOTIFY parameter: This parameter indicates to the system that a message is to be sent to your time sharing terminal when your job completes. The NOTIFY parameter is coded on the JOB statement.

null statement: A jcb control statement
used to mark the end of a jcb's control
statements and data.

CUTIIN parameter: This parameter is used to specify the maximum number of logical records you want included for the cutput data set being routed through the cutput stream. The CUTLIM parameter is coded on a DD statement that must also contain the SYSCUT parameter.

output class: An alphabetic or numeric character that characterizes the type of output data to be written to a unit record device. Each cutput class is defined by the installation. For system messages, you indicate the type of cutput data in the MSGCIASS parameter on a JOE statement; for output data sets, you indicate the type of output data in the SYSOUT parameter on a DD statement.

output listing: A form that is printed at the end of your job that may comtain job control statements used by your job, diagnostic messages about your job, data sets created by your job, or a dump.

output stream: Diagnostic messages and other output data issued by the operating system or the processing program on output devices especially activated for this purpose by the operator.

output writer: A part of the job scheduler that writes cutput data sets onto a system output device, independently of the programs that produced the data sets. It also writes system output messages.

<u>FARM parameter</u>: This parameter is used to supply a processing program with information it requires at the time the program is executed and is coded on an EXEC statement.

<u>parameter</u>: A character string that is recognized as having πeaning by the reader/interpreter. For πost of these character strings, variable information is provided to give a constant value for a specific process or purpose.

partition: In systems with MFT, a subdivision of the dynamic area of main storage set aside for a job step or a system task.

partitioned data set: A collection of independent groups (called members) of sequential records on a direct access volume. Each member has a unique name and is listed in a directory at the beginning of the data set.

<u>FEND statement</u>: A jcb statement used to mark the end cf an in-stream procedure.



<u>PGM parameter</u>: This parameter appears as the first parameter on an EXEC statement when you want to execute a particular program.

physical record: A record that is defined
in terms of physical qualities rather than
by the information it contains (logical
record).

<u>positional parameter</u>: A parameter that must precede all keyword parameters in the operand field of a jcb control statement. Positional parameters must appear in a specified order.

<u>primary quantity</u>: The initial amount of space on a direct access volume that you request in the SPACE, SPLIT, or SUBALICC parameter.

priority: A rank assigned to each job step
that determines the order in which job
steps are selected for execution and
requests for resources are satisfied.

<u>priority scheduler</u>: A scheduler that processes complete jobs according to their initiation priority within jcb classes. Priority sheedulers can accept input data from more than one input stream.

<u>private</u>: The term applied to a mounted volume that the system cannot allocate to an output data set for which a nonspecific volume request is made. A private volume is demounted after its last use in a job step.

private library: A partitioned data set
whose members are load modules not used
often enough to warrant their inclusion in
the link library. To execute a program
that resides on a private library, you must
define that library on a DD statement that
has the ddname JOBLIB or STEPLIB.

PROC parameter: This parameter appears as
the first parameter on an EXEC statement
when you want to call a particular
cataloged or in-stream procedure.

<u>PROC statement</u>: A job control statement used in cataloged or in-stream procedures. It can be used to assign default values for symbolic parameters contained in a procedure. For in-stream procedures, it is used to mark the beginning of the procedure.

procedure step: That unit of work
associated with one processing program and
related data within a cataloged or
in-stream procedure. A cataloged or
in-stream procedure consists of one or more
procedure steps.

processing program: Any program capable of operating in the system as a problem program does. This includes IBM-distributed language processors, application programs, service and utility programs, and user-written programs.

<u>FRTY parameter</u>: This parameter is used to indicate the jcb's initiation priority within its jcb class and is coded on a JOB statement.

public: The term applied to a mounted
volume that the system can allocate to an
output data set for which a nonspecific
volume request is made. A public volume
remains mounted until the device on which
it is mounted is required by another
volume.

<u>CNAME parameter</u>: This parameter allows the user to access messages received by means of TCAM for processing by an application program. It is coded on the LE statement.

qualified name: A data set name that is composed of multiple names separated by periods (e.g., A.B.C.). For a cataloged data set, each name corresponds to an index level in the catalog.

RD parameter: This parameter is used to define the type of restart that can occur and is coded on a JOB or EXEC statement.

reader/interpreter: A jcb scheduler
function that analyzes ar input stream of
job control statements.

record: A general term for any unit of
data that is distinct from all others.

region: In systems with MVT, a subdivision of the dynamic area of main storage set aside for a jcb step or a system task. You can specify in the REGION parameter on the JCB statement or EXEC statement how large this area of main storage should be.

REGION parameter: This parameter is used to specify how much contiguous main storage is required to execute a job step and can be coded on a JOB or EXEC statement. If main storage hierarchy support is included in the system, the REGION parameter is also used to identify the hierarchy or hierarchies in which the storage is to be allocated.

resource: Any facility of the computing system or operating system required by a job or task and includes main storage, input/output devices, the CPU, data sets, and control and processing programs.

restart: The process of resuming a job after it abnormally terminates. When a restart is performed, processing is continued either at the beginning of a job step that caused the abnormal termination or at a checkpoint within this job step.

<u>RESTART parameter</u>: This parameter is used to identify the step or the step and the checkpoint within the step at which execution of a job is to be resumed and is coded on the JOB statement of a resubmitted job that is to use the checkpoint/restart facilities.

<u>ROLL parameter</u>: This parameter is used to specify a job step's ability to be rolled out or to cause rollout cf another job step and is coded on a JOB or EXEC statement.

rollout/rollin: An optional MVT control
program feature that allows the temporary
assignment of additional main storage to a
job step.

scheduler: See job scheduler.

secondary quantity: The additional amount of space on a direct access volume that you want allocated to a data set if the primary quantity requested in the SPACE, SPIIT, or SUBALLOC parameter is not sufficient.

secondary storage: See auxiliary storage.

<u>SFP parameter</u>: This parameter is used to request channel separation from specific data sets defined earlier in the job step and can be coded on a DD statement.

sequential data set: A data set whose
records are organized on the basis of their
successive physical positions, such as they
are on magnetic tape.

<u>Shared control</u>: This means that jobs that are executing simultaneously with a job step that specifies SHR for a data set can use that data set if they also specify SHR for that data set name.

<u>SPACE parameter</u>: This parameter is used to indicate how much space should be allocated on a direct access volume for a new data set and is coded on a DD statement.

specific volume request: A request for
volumes that informs the system of the
volume serial numbers.

<u>SPLIT parameter</u>: This parameter is used to allocate space to two or more new data sets that are to share cylinders. The SPLIT parameter is coded on a LD statement.

<u>station</u>: In TCAM, either a remote terminal, cr a remote computer used as a terminal.

STEPLIE: A special ddname that when specified on a ED statement indicates to the system that you are defining a private library.

stepname: The name assigned to an EXEC
statement; it identifies a jcb step within
a job.

step restart: A restart at the beginning of a job step that abnormally terminates. The restart may be automatic (depending on an eligible completion code and the operator's consent) or deferred, where deferred involves resubmitting the job and coding the RESTART parameter on the JOB statement of the resubmitted job.

storage volume: The main function of a storage volume is to contain nontemporary data sets for which a nonspecific volume request was made and PRIVATE was not coded in the VOLUME parameter. A direct access volume becomes a storage volume when so indicated in a MOUNT command or in a member of SYS1.PARMLIE named PRESRES.

SUBALICC parameter: This parameter is used to place a series of a new data sets in one area of contiguous space on a direct access volume and in a certain sequence. The SUBALICC parameter is coded on a DI statement.

subparameter: One of the items of variable
information that follows a keyword
parameter and can be either positional or
keyword.

symbol: In the IBM System/360 Operating
System, any group of eight or less
alphameric and national characters that
begins with an alphabetic or national
(#,a,\$) character.

symbolic parameter: A symbol preceded by an ampersand that appears in a cataloged procedure. Values are assigned to symbolic parameters when the procedure in which they appear is called.



SYSABEND: A special ddname that when specified on a DD statement tells the system you are defining a data set on which a dump can be written if the step abnormally terminates. The dump provided includes the system nucleus, the processing program storage area, and possibly a trace table.

SYSCHK: A special ddname that when specified on a DD statement that precedes the first EXEC statement in the job tells the system you are defining a data set that contains checkpoint entries. This DD statement is included in a jcb that is being resubmitted for execution and execution is to begin at a particular checkpoint.

<u>SYSCTLG</u>: The name of a system data set that contains the name and location of cataloged data sets.

SYSIN: A name conventionally used as the data definition name of a data set in the input stream.

SYSOUT parameter: This parameter is used to assign an output class to an output data set and can be coded on a DD statement.

system data sets: The data sets that make
up the IBM System/360 Operating System.

system generation: The process of producing an operating system made up of standard and optional components.

system input device: A device specified as
a source of an input stream.

system library: One of the collection of
all cataloged data sets at an installation.

system management facilities: An optional control program feature that provides the means of gathering and recording information that can be used to evaluate system usage.

system messages: Messages issued by the system that pertain to a problem program. These messages appear on an cutput listing and may include such messages as error messages, disposition messages, and allocation/de-allocation messages.

system output device: An output device,
shared by all jobs, cnto which specified
output data is written.

SYSUDUMP: A special ddname that when specified on a DD statement tells the system you are defining a data set on which a dump can be written if the step abnormally terminates. The dump provided is the processing program storage area.

SYS1.LINKLIB: The name of a partitioned data set that contains IBM-supplied processing programs and part of the nonresident portion of the control program. It may also contain user-written programs.

SYS1.PROCLIE: The name of a partitioned system data set that contains cataloged procedures.

SYS1.SYSJCECE: A system data set that contains imformation about the input and output streams, and contains the input and output queues.

task: The smallest unit of work that can be performed under the control program.

Telecommunications Access Method (TCAM):
The combination of an access technique and a given data set organization in a teleprocessing application that allows the programmer to transfer data between main storage and remote I/O devices.

temporary data set: A new data set that is created and deleted in the same jct.

<u>TERM parameter</u>: This parameter is used to indicate to the system that the input or output data being defined is coming from or going to a time sharing terminal.

terminal table: An ordered collection of information consisting of a control field for the table and blocks of information on each line, station, component, or application program from which a message can originate or to which a message can be sent.

termination: The process of performing disposition processing, as specified in the DISP parameter, de-allocating input/output devices, and supplying control information for writing job output on a system output unit.

TIME parameter: This parameter is used to assign a time limit on how long the job or a particular job step can use the CPU and is coded on a JOB or EXEC statement, or both.

time sharing: A method of using a computing system that allows a number of users to execute programs concurrently and to interact with the programs during execution.

Time Sharing Crticn (TSC): An option of the operating system providing conversational time sharing from remote terminals.

time-slicing: The sharing of the CPU by certain tasks for an equal, predetermined length of time.

TYFRUN parameter: This parameter is used to hold a jcb for execution until the operator issues a RELEASE command and is coded as TYPRUN=HOLD or a JOE statement.

<u>UCS parameter</u>: This parameter is used to describe the character set you want to use for printing an output data set on a 1403 printer. The UCS parameter is coded on a LD statement.

unit address: A 3-byte number, made up of the channel, control unit, and unit numbers, that identifies a particular device. Coding a unit address in the UNIT parameter is one way of indicating what input/output device you want allocated to the job step.

<u>UNIT parameter</u>: This parameter is used to describe what device and how many devices you want assigned to a data set. The UNIT parameter can be coded on a DD statement.

V format: A data set format in which
logical records are of varying length and
include a length indicator; and in which V

format logical records may be blocked, with each block containing a block length indicator.

<u>VOL parameter</u>: This parameter is used to identify the volume(s) on which a data set resides or will reside and is coded on a DD statement. Coding VOL is the same as coding VOLUME.

volume: That portion of an auxiliary storage device that is accessible to a single read/write mechanism.

VOLUME parameter: This parameter is used to identify the volume(s) on which a data set resides or will reside and is coded on a DD statement. Coding VOLUME is the same as coding VCL.

volume table of contents (VTOC): A table in a direct access volume that describes each data set on the volume.



Index

Indexes to systems reference library	parameter 208
manuals are consolidated in the publication	AFF parameter on DD statement 127-128
IBM System/360 Operating System: Systems	examples cf 128
Reference Library Master Index, C28-6644.	requesting channel separation
For additional information about any	127,128,197-198
subject listed below, refer to other	rules for coding 197
publications listed for the same subject in	affinity
the Master Index.	channel (see channel separation) unit 235-236
Where more than one page reference is	volume 242-243
given, the major reference is first.	AL subparameter in the LAEEL parameter 188,191
{ }	alphameric character set 41
use 35	ALX subparameter in the SPACE parameter
[]	204,205
use 35-36	American National Standard labels 189,191
•••	apostrophes in data set name 184-185
use 36	appendixes 284-331
£ 286-289,183	area arrangement for ISAM data set 313-314
£ 183	area name 310-311
* parameter on DD statement 118-120	areas of ISAM data set 310
coding BLKSIZE subparameter 119-120	ASB reader (see automatic SYSIN batching
coding BUFNO subparameter 119-120	reader)
examples of 119-120	ASCII magnetic tape
glossary 333	DCB parameter 133,135,141,143,146
read by automatic SYSIN batching reader	IABEL parameter 188-192
119	AUL subparameter in the LAPEL parameter
* subparameter in the RESTART parameter 67	188-192
*** 40,270,285	attributes, DCB 132-148
//* 270	automatic checkpoint restart 61,91,304
++ 286	disposition processing with 62,92
+/ 286	automatic restart (see alsc automatic
++* 286	checkpoint restart; autcmatic step
	restart)
	automatic ster restart 61,91,304
ABEND dumps 114-115	disposition processing with 62,92
absolute track technique 206	automatic SYSIN batching reader
for ISAM data set 315	<pre>* parameter read by 119</pre>
ABSTR subparameter in the SPACE parameter	DATA parameter read by 120
206	restrictions on use of symbolic
for ISAM data set 315	parameters 302-303
accounting information parameter on JCB	automatic volume recognition (AVR)
statement 49-50	channel separation requests 128,197
examples of 50	specifying a group name 231
requirement for coding 49	average block length
rules for coding 49	in SPACE parameter 202
special characters in 49	in SPLIT parameter 211
ACCT parameter on EXEC statement 82	in SUBALLCC parameter 215
examples of 82	AVR (see automatic volume recognition)
overriding the 82	
rules for coding 82	
special characters in 82	hadroned reference 110
adding	backward reference 40
DD statements to cataloged procedure	to a concatenation 40-41
299-300	in DCB parameter 40,131

parameters to

DD statements in cataloged

EXEC statements in cataloged

procedures 296

procedures 292

address, unit 229 address subparameter in the SPACE

Index

with deferred restart 68 in DSNAME parameter 40,184 in FGM parameter 40,78-79

in VCIUME parameter 40,242

creating 327-328 retrieving 327-328

BDAM data set

EFALN, DCB subparameter 132	calling 283-284
BFTEK 132-133	contents cf 300
EFTEK, DCB subparameter 132-133	DD statement
BFALN 132	adding ED statements 297-298
BISAM data set (see indexed sequential data	adding parameters to 294
Set) ELKSIZE, DCB subparameter 133-134	nullifying parameters 294-295 overriding concatenated data sets
coded with	297
* parameter 119	overriding parameters on 292-294
DATA parameter 122	EXEC statement
CCNAME parameter 163-164	adding parameters to 290
SPACE parameter 202-204	nullifying parameters on 290
SUEALLOC parameter 215-216	overriding parameters to 288-289
default for data in input stream 325	modifying 303
block length subparameter	using 283-299
in SPACE parameter 201-204	writing 300-303
in SPLIT parameter 211 in SUBALLOC parameter 214-216	CATIG subparameter in the DISP parameter 173
blocking data in the input stream 119,122	channel affinity (see channel separation)
default 325	channel separation
blocks, directory, in a BPAM data set	requesting 127,197
(see directory)	character set
BLP subparameter in the LABEL parameter	alphameric 41
191	national 41
restriction on use 325	special 41
BPAM data set	character set code, specifying 223
(see also directory; member name)	checkid subparameter in the RESTART
creating 327-328	parameter 67
retrieving 327-328 braces	special characters in 67,42 checkpoint data set 116-117
use 35	specifying a secondary quantity for
brackets	202-204
use 35	checkpoint restart
PSAM data set	automatic 61,94,304
creating 327-328	deferred 67-69,305-306
retrieving 327-328	checkpoint/restart facilities (see
EUFIN, CCB subparameter 134	checkpoint restart)
EUFL, CCB subparameter 134-135	checkid 67
EUFMAX, DCB subparameter 135	checkpoint data set 116-117
EUFNO, DCB subparameter 135 coded with	deferred checkpoint restart 67-69,305-306
* parameter 119	deferred step restart 67-69,304-305
DATA parameter 122	RD parameter on EXEC statement 91-93
CDNAME parameter 163-164	RD parameter on JOE statement 61-63
default for data in input stream 325	RESTART parameter on JOE statement
EUFOFF, DCB subparameter 135	67-69
EUFOUT, CCB subparameter 136	step restart (see step restart)
EUFRQ, DCB subparameter 136	SYSCHK DD statement 116-117
EUFSIZE, DCB subparameter 136	CHKPT macro instruction 61-63,67-69,91-93
bypass label processing 191 restriction on use 325	class job 51
bypassing I/O operations on a data set	message 55
(see DUMMY parameter)	system cutrut 218-221
bypassing a job step 84-85	CLASS parameter on JOE statement 52
	assigning a jcb class 52
	default 52
cataloged data set	exaπples cf 52
creating 173	format cf 52
generation data set 318-322	rules for coding 52
providing	classnames
data set sequence number 190	for output streams 218-220
label type information for 190-191 unit information for 210-215	CCDE, DCB subrarameter 136 mutually exclusive with
retrieving 327-328	KEYLEN 140-141
cataloged procedure 282-303,31	MODE 141
adding to procedure library 303	FRTSF 145
assigning values to symbolic parameters	STACK 148
284-286	TRTCH 148

coding form 43	temporary
coding special characters 42	on direct access volume 327-328
command statement 264-267,27	output stream 327-328
commands for	on tape volume 327-328
MFT 265-266	on unit record device 327-328
MVT 266-267	CYL subparameter
example of 267 format of 264	in SPACE parameter 201-202 in SPLIT parameter 210
rules for coding 264-265	in SUBALLCC parameter 214
commands, operator 265-267	cylinders
comment statement 268,27	sharing 209-212
example of 268	CYLCFI, DCE subparameter 137
format of 268	• • • • • • • • • • • • • • • • • • •
rules for coding 268	
comments field 37	data control block
continuation of 39-40	completing the 129-132
example of 37	data definition statement 103-263
concatenated data set	(see also ID statement)
overriding 297	data in the input stream
concatenating data sets 40-41 example of 41	defining 118-126,163,177 DATA parameter on DE statement 121-123
concatenation	coding ELKSIZE subparameter 122
of data sets 40-41	coding EUFNC subparameter 122
of private libraries 110,113	coding DIAGNS parameter 121
COND parameter on EXEC statement 83-86	examples cf 122-123
examples of 85-86	format cf 121
format of 83	read by automatic SYSIN batching reader
overriding 85	122
rules for coding 83-85	rules for coding 121
use of	data management 22
bypassing a job step 84	data set
executing a job step 84-85	creating a (see creating data sets)
COND parameter on JOB statement 53-55	retrieving a (see retrieving data sets)
examples of 55	data set control 167-169
format of 53	data set in the input stream (see data in
rules for coding 53 use of 53	the input stream) data set integrity 167-169
conditional disposition cf a data set	data set label
173-175	completing the data control block
CATLG 174	129-131
for deferred restart 305,306	copying attributes from a 129-131
CELETE 173	model 318-319
KEEP 174	data set name (see DSNAME)
UNCATLG 174	in apostrophes 185
CONTIG subparameter in the SPACE parameter	copying name from earlier DD statement
204-205	184
continuing control statements	nontemporary 180-181
comments field 39	qualified 180-181
operand field 38-39 control volume 181	temporary 182-183 unqualified 180
CPRI, DCB subparameter 136-137	DCB (see data control block)
CPU time limit 71-100	DCB attributes 132-161
creating data sets	DCB macro instruction
nontemporary	completing the data control block
to be cataloged 173	129-132
direct organization 327-328	DCB parameter on DD statement 129-161
generation data set on direct access	backward references to 132,40-41
volume 319-320	coded on
generation data set on tape volume	JCBIIB CC statement 108-110
319-320	STEPLIE DD statement 111-112
indexed sequential organization 310	SYSCHK DD statement 116-117
new member for a partitioned data	coded when
set 327-328	creating generation data set 319
partitioned data set 327-328 sequential data set on direct access	creating ISAM data set 310 retrieving generation data set 321
volume 327-328	retrieving JSAM data set 315
on tape volume 327-328	retrieving rassed data set 171-172
in our cause our out	

coded with	region size 325
* parameter 118-120	with main storage hierarchy support
CATA parameter 121-123	65-66,96-97
DENAME parameter 148-149	withcut main stcrage hierarchy
CUMMY parameter 124-125	support 64,94
SYSOUI parameter 218-221	RCII parameter 70,98,325,87
completing the data control block (see	step pricrity 87
data control block)	system cutrut data set
copying information from	SPACE parameter 325
data set label 131-132	UNIT parameter 325
earlier DD statement 132	TIME parameter 100,325
examples of 161	wait-state time limit 71,100
format of 129	DEFER subparameter in the UNIT parameter
glossary of subparameters 131-161	233-234
nullifying subparameters in the 295	deferred checkpoint restart 67-69,305-306
overriding subparameters in the 293-294	deferred mounting of volumes 233-234
rules for coding 129	nonsharable attribute 246
subparameters, glossary cf 131-161	deferred restart (see alsc RESTART
DCB subparameters 131-161	parameter)
ED statement 103-263, 26	deferred step restart 67-69,304-305
adding parameters to 294	defining restart
examples of 105	on EXEC statement 91-93
fields in 103	on JOB statement 61-63,67-69
format of 103	DELETE subparameter in the DISP parameter
keyword parameters on 127-263,104-105	170-171,173
nullifying parameters on 294-295	
overriding parameters on 292-294	delimiter statement 270,26
positional parameters on 118-127,104	* parameter 119
rules for coding 103-104	DATA parameter 122
ddname	DEN, DCB subparameter 137
	device type 229-230
assigning a 106-107	DIAGNS, DCE subparameter 138
when concatenating 40-41	direct access devices
when defining ISAM data set 310	list cf 229-230
duplicate 106	directory
examples of 107	requesting space for
qualified 106	in SFACE parameter 204-205
special 107	in SUBALLOC parameter 216
CDNAME parameter on DD statement 162-165	DISF parameter on DE statement 166-176
coded with	coded on
BLKSIZE subparameter	JCELIE CC statement 109
163-164,119,120,122	STEPLIE DD statement 112
BUFNO subparameter	SYSAPEND DD statement 115
163-164,119,120,122	SYSCHK II statement 116,117
examples of 164-165	SYSUDUMF II statement 115
format of 162	coded when
rules for coding 162	creating generation data set 319
dedicated data set	creating ISAM data set 312
using 183-184	retrieving generation data set 321
default for	retrieving ISAM data set 317
CLASS parameter 52	conditional disposition subparameter
CPU time limit 71,100,325	173-175
data in the input stream	disposition subparameter 170-173
BLKSIZE subparameter 325	examples cf 176
BUFNO subparameter 325	format cf 167
disposition 169	rules for coding 167
DPRTY parameter 88	status subrarameter 167-169
MSGCLASS parameter 56	dispatching pricrity 87-88,60
MSGLEVEL parameter 57,325	disposition of a data set 170-173
output class for system messages 56	CATIG 173
PRTY parameter 60,325	conditional disposition 173-174
REGION parameter 325	DELETE 170-171
with main storage hierarchy support	KEEP 171
65-66,96-97	PASS 171-172
without main storage hierarchy	UNCATIG 171-172
manage mass country machinery	UNCATEG 1/1=1/2

A				
ı	'n	A	۵	k

disposition processing 170-174 bypassing 124	exclusive control 167-169 EXEC statement 75-102,26
cataloging a data set 173	adding rarameters to 290
deleting a data set 170-171	examples cf 76
keeping a data set 171	fields in 75
passing a data set 171-173	format cf 75
for restart (see RD parameter for JCB and EXEC statements)	keyword parameters on 82-102,76 nullifying parameters on 290
uncataloging a data set 173	overriding parameters on 288-289
CLM parameter 177	positional parameters on 78-81,76
DOS (DISC operating system)	rules for coding 75-78
assigning space in 191	execute statement (see EXEC statement)
CPRTY parameter on EXEC statement 87-88	execution
default for 87	of a cataloged procedure 80,283
examples of 88	of a processing program 78-80
format of 87	EXPDT subparameter in the LAFEL parameter
overriding 88	193
rules for coding 87 time-slicing in MVT 87-88	expiration date 193 (see also retention period)
CSN parameter on DD statement (see DSNAME	effect cn
parameter)	DELETE subparameter 170-173
DSNAME parameter on DD statement 179-185	KEEP subparameter 170-173
backward references 184,40-41	extending a data set (see lengthening a
coded on	data set)
JOELIE DD statement 109	extent 182
STEPLIB CD statement 112	
SYSABEND DD statement 115	FCB parameter 186-187
SYSCHK DD statement 116-117	examples cf 187
SYSUDUMP DD statement 115 coded when	image identifier 186
creating generation data set 319	requesting alignment of forms 186
creating ISAM data set 311	rules for coding 186
retrieving generation data set 321	fields 36-37
retrieving ISAM data set 316	connents 36-37
copying name from earlier DD 184	examples cf 36-37
examples of 185	naπe 36-37
format of 179	operand 36-37 operation 36-37
name in apostrophes 184	FCLD subparameter in the UCS parameter 225
nontemporary data set names 180-181 nullifying DUMMY 124	form number subparameter in the SYSOUT
rules for coding 179-180	parameter 219
special characters in 179-180,43	format of
temporary data set names 182-183	command statement 265
LSORG, LCB subparameter 139-140	connent statement 269
dummy data set 124-125	DD statement 103
(see also NULLFILE)	delimiter statement 271
CUMMY parameter on DD statement 124-125	EXEC stateπent 75 JCB stateπent 45
backward reference to 125	null statement 273
examples of 125 format of 124	PEND statement 275
nullifying 124-125, 295	PRCC statement 277
rules for coding 124	publication 19
dump, abnormal termination	FUNC, DCB subparameter 140-141
storing the 114-115	
writing to unit record 114	
CYNAM parameter on DD statement 126,162	generation data group
example of 126	creating 318-320
format of 126	index 318
nullifying 126 rules for coding 126	name 318 generation data set
dynamic allocation 126	creating 319-320
	with deferred restart 322
	name of 318
	retrieving 321-322
ellipsis	generation number, relative 318
USE 36	GNCP, DCB subparameter 140
ERCPT, DCB subparameter 139 EVEN subparameter in the CONT rayareter 83	graphic devices, list of 232

HIARCHY, DCB subparameter 140	JCB statement 45-73,25
hierarchy 0 65-66, 96-97	examples cf 47
hierarchy 1 65-66, 96-97	fields in 45
HOLD subparameter in the TYPRUN parameter 73	format cf 45 keyword parameters on 49-51,46
holding a job 73	positional parameters on 52-73,46
iciding a job 75	jobclass subparameter in the CLASS
identifying the data set (see DSNAME)	parameter 52
IEFBR14 program 79	JCBIIB DD statement 108-111,79
IN subparameter in the LABEL parameter	(see alsc STEPLIB)
192-193	concatenating private libraries 110
incremental quantity (see secondary	examples cf 110-111
quantity)	parameters to code when
index	catalcged 109
requesting space for 312-313,204-205	nct cataloged 109-111 rules for coding 108
index area 310 indexed sequential data set 310-317	job management (scheduler) 23
area arrangement of 313-315	jobnane
creating 310-313	assigning a 48
example of 317	examples cf 48
name	
nontemporary 180-182	
temporary 182-183	KEEP subparameter in the DISP parameter
requesting space for index 312-313,204	170-171,174
retrieving 316-317	kept data set
example of 317	retrieving 327-328
unit restrictions for 315	KEYIEN, DCE subparameter 140-141
initiation priority 60	coded with
input data set	SFACE parameter 202
concatenating 40-41	SFLIT parameter 211 SUBALLCC parameter 215
identifying the data set 179-185 IN subparameter 192-193	mutually exclusive with
providing	CCDE 136
unit information 227-228	MCDE 141
volume information 237	PRTSP 144
specifying	STACK 148
conditional disposition of 172-174	TRTCH 148
disposition of 170-173	keyword parameters
status of 167-169	on DD statement 127-263,104-105
input stream 119, 122, 177	on EXEC statement 82-102,76
defining data in the 119,123	on JOB statement 49-51,46
input work queue 52	rules for coding 37-38
in-stream procedures 282-303,31 assigning values to symbolic parameters	
284	IABEI parameter on DD statement 191-194
calling 283	coded on SYSCHK DD statement 116,117
contents of 300	coded when
DD statement	creating generation data set 320
adding DD statements 297-298	creating ISAM data set 312
adding parameters to 294	retrieving generation data set 320
nullifying parameters 294-295	retrieving passed data set 171
overriding parameters on 292-294	data set sequence number subparameter
EXEC statement	190
adding parameters to 290	examples of 193-194
nullifying parameters on 290	EXPDT subparameter 193 format cf 188
overriding parameters to 288-289 modifying 303	IN subparameter 192-193
using 299	label type subparameter 189-191
writing 300-303	CUT subgarameter 192-193
INTVL, CCB subparameter 140	PASSWCRD subparameter 192
ISAM data set (see indexed sequential data	RETPD subrarameter 193
set)	rules for coding 189
	when to code 190
job class 52	labels types 192
default 52	labels
priority 60	data set 189-190
job library 108-111	direct access 189-190
job separators 220	nonstandard (NSL) 191-192

standard (SL) 191-192	nonspecific volume request 238
standard and user (SUL) 191-192	for direct access volume 77,238
tape 189	satisfying a 247-248
lengthening a data set	for tape volume 193,238
space requirements	nonstandard labels
SPACE parameter 204	label type subparameter 191-192
SUEALLOC parameter 216	processing routines for 191
specifying status 167	nontemporary data set
volume sequence number subparameter 239	creating 326-327
libraries, concatenating private 108-111	NOPWREAD subparameter in the LABEL
library	parameter 192
private 108-111,79	NOTIFY parameter on JOE statement
· · · · · · · · · · · · · · · · · · ·	
procedure 81,282	example of 59
system 79	format cf 59
temporary 78	rules for coding 59
LIMCT, DCB subparameter 141	NR subparameter in the RD parameter 62,92
OPTCE=E 142	NSI subparameter in the LAPEL parameter
link library 79	191-192
load module 22	NTM, DCB subparameter 141
LRECL, DCB subparameter 141	CPTCD=M 142
LTM, label subparameter 193-194	null statement 272,26
	exaπple cf 272
main storage	format cf 272
acquiring additional 70,98	NULLFILE 126,295
REGION parameter on EXEC statement	nullifying
94-97	DCB subrarameters 295
REGION parameter on JOB statement 64-66	DD statement parameters 294-295
main storage hierarchy support 65-66,96-97	DUMMY parameter 126,295
member name, assigning a 181-183	EXEC statement parameters 290
MOD subparameter in the DISP parameter 169	nne statement parameters 250
MODE, CCE subparameter 141	CLD subparameter in the DISP parameter 169
mutually exclusive with	CNLY subparameter in the CONE parameter
CODE 136	83-84
KEYLEN 140-141	operand field 37
PRTSP 144	blank 297
TRTCH 148	example of 37
model data set label 318-319	keyword parameters 37-38
mount attributes 243-244	positional rarameters 37
mounting	subparameters 38
deferred 233-234	operation field 37
parallel 233	exaπple cf 37
MSGCLASS parameter on JOB statement 56	operator ccmmands 265-267
assigning an output class 56	operator subparameter in the COND
coded with SYSOUT parameter 56,219	paraπeter 53,83
default 56	CPTCD, DCB subparameter 142-145
examples of 56	CUT subparameter in the LAPEL parameter
format of 56	192-193
rules for coding 56	CUTLIM parameter 195
MSGLEVEL parameter on JOB statement 57-58	coded with SYSOUT parameter 195
	determining the output limit 195
examples of 58	example 195
format of 57	rules for coding 195
restart in MFT, MVT 62,91	output of
rules for coding 57	allocation messages 57
MXIG subparameter in the SPACE parameter	allocation recovery πessages 57
204	disposition messages 57
	job control statements 57
name field 36	output class
example of 37	for system messages 56
national character set 41	output class subparameter in the MSGCLASS
NC subparameter in the RD parameter 62,92	parameter 56
NCP, ECB subparameter 141	output data set
new output data set	allocating space for 199-217
creating 326-327	creating 326-327
NEW subparameter in the DISP parameter 169	lengthening 169
NL subparameter in the LABEL parameter	CUT subrarameter 192-193
191-192	printed using UCS feature 223-225
1/1 1/6	prince doing our redeare was and

nonsharable attribute 247

Index

providing	format cf 79
unit information 227-228	positional parameters
volume information 237	on DD statement 118-127,104
routed through output stream 218-221	on EXEC statement 78-81,76
specifying	on JCB statement 52-73,46
conditional disposition 173-174	rules for coding 37
disposition 170-173	postponing definition of a data set
status 167-169	DDNAME rarameter 162-165
output stream	PRESRES entry 243-244
routing data sets through the 218-221	primary quantity
output writer 218-221	in SPACE parameter 202,204-205
overflow area 310	in SPIIT parameter 210-211
overriding	in SUBALLCC parameter 215
concatenated data sets 297	prime area 310
DCB subparameters 293-294	priority
DD statement parameters 292-294	initiation 60
EXEC statement parameters 288-289	job 60
with mutually exclusive parameters 292	job class 60
PARM parameter 289	step 87
TIME parameter 289	priority parameter (see PRTY)
-	private libraries 108-111,78
P subparameter in the UNIT parameter 233	concatenating 108-111
parallel mounting 233	executing programs from 108-111,79
parentheses	PRIVATE subparameter in the VOLUME
to enclose a subparameter list 37	paraπeter 238-239
inclusion in variables 38	private vclume 238-239,243-244
PARM parameter on EXEC statement 89-90	PRCC parameter on EXEC statement 81,283
examples of 90	examples cf 81
format of 89	format cf 81
overriding the 89,289	PRCC statement 277-279,26
rules for coding 89	assigning values to symbolic parameters
special characters in 89,42	on 277-278
partitioned data set	example of 278
concatenating 40-41	format cf 276
creating 326-327	rules for coding 276-277
exeduting programs in a 108-111,79	procedure (see cataloged procedure;
lengthening 167	instream procedure)
name	procedure library 81,282
nontemporary 180-181	procedure name 81,282
temporary 182-183	procedure ster 282
retrieving a member of 326-327	processor stcrage 65-66,96-97
space for directory	program
in SPACE parameter 204	calling a 78-80
in SUBALLOC parameter 216	program name 78
PASS subparameter in the DISP parameter	subparameter in the SYSOUT parameter
170-171	220
passed data set	programmer's name parameter on JOB
providing	statement 51
data set name 171	examples cf 51
data set sequence number 190	format cf 51
DCB information 172	requirement for coding 325
disposition 171	rules for coding 51
label type 172,190-191	special characters in 51,42
unit information 172,227	programming notes 35-43
retrieving 326-327	PRTSP, DCB subparameter 145
password protection 192	mutually exclusive with
PASSWORD subparameter in the LABEL	CCDE 136
parameter 192	KEYLEN 140-141
PCI, DCB subparameter 145	MCDE 141
PEND statement 274-275, 26	STACK 148
permanently resident volume 243	TRTCH 148
PGM parameter on EXEC statement 78-80	PRTY parameter on JOE statement 60
backward references 79,40	default 60,325
examples of 79-80	examples cf 60
executing programs from	format cf 60
private library 108-111,79	rules for coding 60
system library 79	time-slicing in MVT 60
temporary library 78	public volume 238-239,243-244
combound opposit .	France remarks and mortal of mili

4					
н	Т.	n	٦	_	ŧ

QISAM data set (see ISAM data set) QNAME parameter on the DD statement 196 example of 196 format of 196 rules for coding 196 qualified name assigning a 180-181	remote job entry restriction on use of PUFNO subparameter with * parameter 119 with DATA parameter 122 with DENAME parameter 163-164 removable volume 243-244 RESERVE, DCB subparameter 148 reserved volume 243-244 restart types of 304-308
R subparameter in the RD parameter 62,92 RD parameter on EXEC statement 91-93 defining restart 92 examples of 93 format of 91 overriding the 92 restart facilities 91-92 rules for coding 91	restart definition (RD parameter) on EXEC statement 91-93 on JCB statement 61-63 restart facilities examples cf 307-308 RD parameter on EXEC statement 91-93 RD parameter on JOB statement 61-63 RESTART parameter cr JOB statement
RD parameter on JOB statement 61-63 defining restart 62 examples of 63 format of 61 restart facilities 61-62 rules for coding 61	67-69 RESTART parameter on JCE statement 67-69 examples of 68-69 format of 67 rules that apply when defining generation data set 68
reader procedure defaults supplied in the 324-325 RECFM, DCB subparameter 144-148 REF subparameter in the VOLUME parameter 242 references, backward (see backward	making backward reference 68 rules for coding 67 RETAIN subparameter in the VOLUME parameter 239 retention period 193 effect on
references) REGION parameter on EXEC statement 94-97 with main storage hierarchy support 96-97 acquiring additional main storage 97	DELETE subparameter 171,174 KEEP subparameter 170,174 RETPD subparameter in the LAPEL parameter 193 retrieving data sets 326-328
default 96-97 examples of 97 format of 96 overriding the 97 rules for coding 96 without main storage hierarchy support	cataloged 327 generation data set 321,328 indexed sequential data set 316,328 member cf partitioned data set 327 noncataloged data set with direct organization
94-95 acquiring additional main storage 94 default 94,325 examples of 95 format of 94 overriding the 94	327 sequential data set cn direct access volume 327 on a tare volume 327 passed data set 171-172,328 return code 53,83
rules for coding 94 REGION parameter on JOB statement 64-66 with main storage hierarchy support 65-66 acquiring additional main storage 66	return code test 53,83 effect on disposition processing 170 RKF, DCB subparameter 148 RLSE subparameter in the SPACE parameter 204
default 65-66,325 examples of 66 format of 65 rules for coding 65 without main storage hierarchy support 64	effect on existing data set 204 RNC subparameter in the RD parameter 62,92 RCII parameter on EXEC statement 98-99 default 98,325 examples of 99
acquiring additional main storage 64 default 64,325 examples of 64 format of 64 rules for coding 64 relational operators in the COND parameter	format cf 98 overriding the 98 rules for coding 98 ROLI parameter on JOB statement 70 default 70,325 examples of 70
53,83 relative generation number 318 relative track number 205 releasing unused space (see RLSE)	format cf 70 rules for coding 70 rollout/rollin 70,98 ROUND subparameter in the SPACE parameter 106

scratch volume 239, 243-244	requesting space 199-205
secondary quantity	rules for coding 199-200
in SPACE parameter 202-204	special character set 42
in SPLIT parameter 211	with UCS parameter 223
in SUEALLOC parameter 215	using 41,42
Section I: Programming Notes 35-44	special ddnames 108-118
Section II: The JOB Statement 45-73	specific volume request 237
Section III: The EXEC Statement 75-102	for direct access volume 237, 202
Section IV: The DD Statement 103-263	satisfying a 247
Section V: The Command Statement 263-266	for tape volume 237
Section VI: The Comment Statement 268	split cylinder mode 210
Section VII: The Delimiter Statement 270	SPLIT parameter on DD statement 209-212
Section VIII: The Null Statement 272	(see alsc SPACE; SUPALLOC)
Section IX: The PEND Statement 274-275	coded on
Section X: The PROC Statement 276-279	SYSAPEND DD statement 114-115
Section XI: Appendixes 280-331	SYSUDUMP DD statement 114-115
Section XII: Glossary 333-342	examples cf 211-212
Section XIII: Control Statement Foldout	format cf 208
Charts 356-351	requesting space 210-211
SEP parameter on DD statement 197-198	rules for coding 209
examples of 198	STACK, DCB subparameter 148
format of 197	mutually exclusive with
requesting channel separation 197	CCDE 136
rules for coding 197	KEYLEN 140-142
SEP subparameter in the UNIT parameter 234	PRTSF 144
separation	TRTCH 148
channel 197-198, 127-128	states, volume 243-248
unit 234	status subparameter in the DISP parameter
	167-168
sequence number	step, job 22
data set 190 volume 239	- · · · · · · · · · · · · · · · · · · ·
	step dispatching priority (see CPRTY)
Sequential data set	step restart
concatenating 40-41	automatic 61,91,304
creating 326-327	deferred 67-69,304-306
lengthening 170-172	STEPLIB DD statement 111-114,78-79
retrieving 327-328	(see also JCELIE)
SER subparameter in the VOLUME parameter	concate nating private libraries 113
240-242	examples cf 113-114
shared control 167-169	parameters to code when
sharing	cataloged 112
cylinders 209-212	not cataloged or not passed 112
data set 169	passed 112
SHR subparameter in the DISP parameter 169	rules for coding 111-112
SL subparameter in the LABEL parameter 169	stepname
SOWA, DCB subparameter 148	assigning a 77
SPACE parameter on DD statement 199-206	examples of 77
(see also SPLIT; SUBALLOC)	storage volume 243-248
assigning specific tracks 205	stream, input, data sets in the
coded on	118-126,177
SYSABEND DD statement 115-116	stream, cutput, routing data sets through
SYSUDUMP DD statement 115-116	the 218-221
coded when	SUBALICC parameter on DD statement 213-217
creating generation data set 319	(see alsc SPACE; SPLIT)
creating ISAM data set 310	coded on
	SYSAEEND DD statement 114-115
coded with SYSOUT parameter 219-220,325 examples of 205-206	SYSUDUMP ID statement 114-115
format of 199	examples of 116-217
letting system assign specific tracks	format cf 213
201-205	requesting space 214-216
allocating whole cylinders 205	rules for coding 213-214
releasing unused space 204	suballocation 214
requesting space for directory 204	subparameter
requesting space for index 204	rules for coding 37
format 199	SUL subparameter in the LABEL parameter
specifying primary quantity 202	191
specifying secondary quantity	suppressing
202-203	CHRPT macre instruction 61,91
unit of measurement 201-202	automatic restarts 61,91

symbolic parameters 300-303,283-285	TERM parameter on the DD statement 223
assigning default values to	examples 223
276-279,303	format cf 223
assigning values to 284-285	rules for coding 223
defining 301	THRESH, DCF subparameter 148
definition of 301	time limit
examples of 301,284	CPU 72,100
nullifying 286	wait state 71,100
PROC statement 276-279,301	TIME parameter on EXEC statement 100-102
SYSABEND DD statement 114-116	affect cf JOE limit 101
(see also SYSUDUMP)	CPU time limit
examples of 115-116	default 100,325
storing the dump 114-115	with SMF 100
writing the dump to unit record device	without SMF 100
.114	eliminating timing 101
SYSCHK ED statement 116-117	examples cf 101-102
with deferred restart 66-67,304-305	format cf 100
examples of 117	overriding the 100,289
parameters to code when	rules for coding 100
cataloged 116-117	wait-state time limit
not cataloged 117	with SMF 100
rules for coding 116	without SMF 100
SYSIN as a ddname 119,29	1440 101
SYSOUT parameter on DD statement 218-221	TIME parameter on JOB statement 71-72
coded on	affect cf JOB time limit 101
SYSAPEND DD statement 114-115	CPU time limit
SYSUDUMP DD statement 114-115	with SMF 71
examples of 220-221	without SMF 71
format of 218	eliminating timing 72
rules for coding 218	examples of 72
specifying classname 219	format cf 71
specifying DCB parameter 219-220	rules for coding 71
specifying form number 219	wait-state time limit
specifying MSGCLASS parameter 219	with SMF 71
specifying program name 219	without SMF 71 1440 72
<pre>specifying SPACE parameter 219-220,324-325</pre>	
specifying UNIT parameter 219-220,325	time sharing cption (TSO) 59,126,222 time sharing terminal 59,222
system library 79	time-slicing
system management facilities	in MFT 87-88
with TIME parameter 71-72,100-102	in MVT 60,87-88
system messages	for a jcb 60
output class 56	for a step 87-88
SYSUDUMP DD statement 114-116	timing
(see also SYSABEND)	CPU 100,71
examples of 115-116	eliminating 101,72
storing the dump 114-115	track number, relative 205
writing the dump to unit record device	TRK subparameter
114	in SPACE parameter 201-202
SYS1.LINKLIE 79	in SUBALLCC parameter 215
SYS1. PROCLIE 81	TRTCH, DCE subparameter 148
	for checkpoint data set 116-117
	mutually exclusive with
tape devices, list of 229	CODE 136
tape labels, ANSI 188-192	KEYLEN 140-141
task management 22	MCDE 141
TCAM (see Telecommunications Access Method)	PRTSF 145
Telecommunications Access Method (TCAM)	STACK 148
teleprocessing	TSC (see Time Sharing Option)
what to code in ROLL parameter 70,98	TYPRUN parameter on JCE statement 73
temporary data set	example of 73
creating 326-327	format cf 73 Index
temporary library 78	rules for coding 73

UCS parameter on DD statement 223-225 examples of 225 format of 223 identifying character set 223 requesting fold mode 225 operator verification 225 rules for coding 223 special character sets 223	volume affinity 241-243 volume count subparameter in the VOLUME parameter 240 VCLUME parameter on DD statement 236-249 backward reference 242,40 coded on JCBLIE DD statement 110 STEPLIE DD statement 112 SYSAEEND DD statement 115
UNCATLG subparameter in the DISP parameter 173-174	SYSCHK ID statement 116,117 SYSUDUMF ID statement 115
unit address 228	coded when
unit affinity 234-235	creating generation data set 320
nonsharable attribute 247	creating ISAM data set 311
unit count subparameter in the UNIT parameter 231	retrieving ISAM data set 316 examples cf 248-249
UNIT parameter on DD statement 226-235	format cf 236
coded on	providing volume information 237-241
JOBLIB DD statement 109	referring to specific request 241
STEPLIB DD statement 112 SYSAPEND DD statement 114-115	rules for coding 237
SYSCHK DD statement 116-117	specifying FRIVATE subparameter 238-239
SYSUDUMP DD statement 114-115	RETAIN subparameter 239
coded when	volume sequence number subparameter
creating generation data set 320 creating ISAM data set 311	239
retrieving generation data set 321	volume ccunt subparameter 240 with suballccation 214
retrieving ISAM data set 316	supplying serial numbers 240-241
retrieving passed data set 171	volume sequence number subparameter in the
examples of 235	VCIUME parameter 239
format of 226 identifying the device 228-233	for checkpoint entry 118 volume serial number 240-242
providing unit information 227-235	for checkpoint entry 117-118
rules for coding 226-227	special characters in 240,41-42
specifying	volume states 248
deferred mounting 233-234 parallel mounting 233	VCIUME=REF backward references 242,40
SYSOUT parameter 219-220	packward references 242,40
unit affinity 234-235	
unit count 233	
unit separation 234	wait state time limit with SMF 72,101
with suballocation 214 unit record devices	without SMF 72,101
list of 230	witchout biri (byze)
writing dumps to 115	
unit separation 234	v / 202
universal character set (see UCS) unqualified name, assigning 180-181	X/ 283 XX 283
use attributes 243-244	XX* 283,40
VERIFY subparameter in the UCS parameter	
225	1440 72,101
VCL parameter on DD statement (see VOLUME	2321 data cell drive
parameter)	unit address 228
volume	unit affinity 234-235
permanently resident 243-245 private 243-245,238-239	2361 ccre stcrage 65,96
public 243-245	
removable 243-245	
reserved 243-245	
scratch 243-244,239 storage 243-245	
DICTING ATT ATT	

	Operand	P/K	Comments
JOB	([account number][,additional accounting information,])	Р	Can be made mandatory
	[programmer's name]	Р	Can be made mandatory
	[CLASS=jobclass]	к	Assign A-O.
	[COND=((code,operator),)]	κ	Maximum of 8 tests
	[MSGCLASS=output class]	κ	Assign A-Z,0-9.
	$\begin{bmatrix} MSGLEVEL = \begin{bmatrix} 0 \\ 1 \\ 2 \end{bmatrix} \begin{bmatrix} 0 \\ 1 \end{bmatrix} \end{bmatrix}$	К	
	[NOTIFY=user identification]	к	Notify user of job completion. For MVT with TSO.
	[PRTY=priority]	κ	Assign 0-13.
	RD= RNC NC NR NC	K	Restort definition
	REGION=({valueK \ value1K}) \ value0K \ \ \ \ value0K \ \ \ \ \ value1 \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	κ	For MVT
	RESTART=(* stepname stepname procstepname (, checkid))	К	For deferred restart
	[ROLL=((YES) (,YES))] (NO) (,NO)	K	Rollout/rollin。For MVT.
	TIME={(minutes, seconds)}	K	Assigns job CPU time limit.
	[TYPRUN=HOLD]	к	Holding a job in job queue.
		[CLASS=jobclass] [COND=((code, operator),)] [MSGCLASS=output class] [MSGLEVEL=[0][0][0][1]] [NOTIFY=user identification] [PRTY=priority] [RD= RNC NC N	[CLASS=jobclass] [COND=((code,operator),)] [MSGCLASS=output class] [MSGLEVEL=(\begin{array}{c} 0 \ 1 \ 2 \end{array} \begin{array}{c} 0 \ 1 \end{array} \begin{array}{c} 0 \end{array} \begin{array}{c} 0 \ 1 \end{array} \begi

Chart 1

Figure 43. Job Statement Chart

Chart 1

			1
		•	

//Name	Operation	P/K	Comments	
//[stepname]	EXEC	(program name PGM={*.stepname.ddname *.stepname.procstepname.ddname} [PROC=]procedure name	Р	ldentifies program or cataloged procedure
		ACCT=(accounting information,) ACCT.procstepname=(accounting information,)	к	Accounting information for step
		COND = (К	Maximum of 8 tests, or 7 tests if EVEN or ONLY is coded
		DPRTY=(value1, value2) DPRTY_procstepname=(value1, value2)	к	Assign values of 0–15. For MVT
		PARM=value PARM.procstepname=value	к	Parentheses or apostrophes enclosing value may be required
		RD=RNC NC NC NR RD.procstepname=RNC NC NC NR	K	Restart definition
		REGION=({valueK } [, value1K]) {value0K} REGION.procstepname=({valueK } [, value1K]) {value0K}	K	For MVT
		ROLL=({YES\},YES\) (NO}(,NO) ROLL.procstepname=({YES\},YES\)) (NO}(,NO)	K	Rollout/rollin. For MVT.
		TIME={(minutes, seconds)} {1440 TIME.procstepname={(minutes, seconds)} {1440	K	Assigns step CPU time limit.
K Keyv	ional paramete vord parameter sse one . onal; if more		•	

Chart 2

Figure 44. Execute Statement Chart

			1
		•	

//Name	Operation	Operand	P/K	Comments
[ddname	DD	[* DATA [,DLM=xx]]	Р	To define a data set in the input stream.
procstepname ddname		[DNWA]	P	To bypass I/O operations on a data set (BSAM and QSAM)
		[DYNAM]	P	To request dynamic allocation. For MVT with TSO.
		[AFF=ddname]	κ	One way to request channel separation.
		DCB=((list of attributes) dsname DCB=(*.ddname *.stepname.ddname *.stepname.procstepname.ddname *.stepname.procstepname.ddname	К	To complete the data control block. See Glossory of DCB Subparameters.
		[DDNAME=ddname]	κ	To postpone the definition of a data set.
		DISP=(NEW OLD SHR MOD) ,DELETE ,KEEP ,CATLG ,CATLG ,UNCATLG ,UNCATLG)	К	To assign a status, disposition, and conditional disposition to the data set
		[DLM=delimiter]	к	Assigns a delimiter other than /*
		dsname dsname(member name) dsname(grea name) dsname(grea name) &&dsname &&dsname &&dsname(member name) &&dsname(grea name) *.ddname *.stepname.ddname *.stepname.procstepname.ddname	K	To assign a name to a new data set or to identify on existing data set. An unqual life of name is 1-8 characters, beginning with an alphabetic or national character.
		FCB=(image-id [,ALIGN, VERIFY])]	K	To specify forms control information. The FC parameter is ignored if the data set is not written to a 3211 printer.
		LABEL=([data set seq #] [,SL ,SUL ,ALL ,NL ,NL ,NL ,NL ,NL ,NL ,NL ,NL ,NL ,	к	To supply label information
		[OUTLIM=number]	K	To limit the number of logical records you want included in the output data set.
		[QNAME=process name]	К	Specifies the name of a TPROCESS macro which defines a destination queue for messages received by means of TCAM.

Figure 45. Data Definition Statement Chart

The DD Statement (con't)								
//Name	Operation	Operand	P/K	Comments				
		TRK CYL blocklength, (primary secondary) , directory , RLSE , ALX SPACE=(ABSTR, (primary quantity, oddress , directory)) , index PACE=(ABSTR, (primary quantity, oddress , directory))	K	To assign space on a direct access volume for a new data set To assign specific tracks on a direct access volume for a new data set				
ddname procstepname ddname	DD	SPLIT= (n,CYL,(primary quantity [,secondary quantity])) (percent, blocklength, (primary quantity [,secondary quantity)])) (percent	К	To assign space on a direct access volume for a new data set. Data sets share cylinders.				
		SUBALLOC=({TRK CYL blocklength}, (primary [, secondary] [, directory]) { , ddname , stepname.ddname , stepname.procstepname.ddname })	κ	To request port of the space on a direct access volume assigned earlier in the job				
		SYSOUT=(classname , program name form number), [OUTLIM=number]	к	To route a data set through the output stream. For classname, assign A-Z or 0-9.				
		[TERM=TS]	К	To indicate to the system that the input or output data being defined is coming from or going to a time sharing terminal.				
		[UCS=(character set code FOLD [, VERIFY]	к	To request a special character set for a 1403 printer				
		\[\left\{ \text{UNIT=(} \begin{array}{c} \text{unit address} \\ \text{device type} \\ \ \text{group name} \end{array} \begin{array}{c} \text{,NEP=(ddname,)} \\ \text{UNIT=AFF=ddname} \end{array} \]	к	To provide the system with unit information				
		\[\langle VOLUME \rangle = ([PRIVATE] [, RETAIN] [, volume seq \(\frac{t}{2} \] [, volume count] [,] \[\langle REF=dsname REF=*, ddname REF=*, stepname, ddname REF=*, stepname, procstepname, procstepname, ddname REF=*, stepname, procstepname, ddname REF=*, stepname, procstepname, ddname REF=*, stepname, procstepname, ddname REF=*, stepname, ddname, procstepname, ddname, ddname	K	To provide the system with volume information				

- Positional parameter.
- Keyword parameter.
- Choose one.

 Enclosing subparameter, indicates that subparameter is optional; if more than one line is enclosed, choose one or none.
- [] Enclosing entire parameter, indicates that parameter may be optional, depending on what type of data set you are defining.

IBM System/360 Operating System: JCL Reference GC28-6704-4

READER'S COMMENT FORM

Your views about this publication may help improve its usefulness; this form will be sent to the author's department for appropriate action. Using this form to request system assistance or additional publications will delay response, however. For more direct handling of such requests, please contact your IBM representative or the IBM Branch Office serving your locality.

Possible topics for comment are:

Cut or Fold Along Line

Clarity Accuracy Completeness Organization Index Figures Examples Legibility

What is your occupation?	
Number of latest Technical Newsletter (if any) concerning this publication:	
Please indicate in the space below if you wish a reply.	

Thank you for your cooperation. No postage stamp necessary if mailed in the U.S.A. Elsewhere, an IBM office or representative will be happy to forward your comments.

Your comments, please . . .

This manual is part of a library that serves as a reference source for system analysts, programmers, and operators of IBM systems. Your comments on the other side of this form will be carefully reviewed by the persons responsible for writing and publishing this material. All comments and suggestions become the property of IBM.

Fold

First Class Permit 81 Poughkeepsie New York Cut or Fold Along Line

Business Reply Mail

No postage stamp necessary if mailed in the U.S.A.

Postage will be paid by:

International Business Machines Corporation Department D58, Building 706-2 PO Box 390 Poughkeepsie, New York 12602

Fold

Fold

IBM

International Business Machines Corporation
Data Processing Division
1133 Westchester Avenue, White Plains, New York 10604
(U.S.A. only)

IBM World Trade Corporation 821 United Nations Plaza, New York, New York 10017 (International)